



Engineering Design Criteria & Standard Drawings

(December 2020)

APPENDIX A – STANDARD DRAWINGS



FOREWORD

The Standard Drawings presented are meant to be read in conjunction with the City's Design Criteria document.

The 2020 edition of the Standard Drawings has been prepared in response to the planned growth envisioned by the City's Official Plan and informed by various Master Plan studies for transportation, water, wastewater and stormwater management infrastructure. While the previous stock of Standard Drawings has been simplified and consolidated wherever appropriate, additional standard drawings have been created to address the past experience of the City as well as emerging trends in the industry.

Changes and revisions will be made to the Design Criteria and Standard Drawings from time-to-time. It is the responsibility of the developer, its engineer(s) and others using this information to obtain and make use of the latest versions available at the time of design.

The Standard Drawings are unique to the City of Vaughan and take precedence over any Ontario Provincial Standard Drawings (OPSD) for similar matters, unless approved otherwise by the City.

If no standard drawing is provided by the City, the OPSD are to be consulted and referenced. In the event that OPSD does not contain the required standard, the developer, through its engineer, may prepare a standard for the review and approval of the City prior to the submission of any designs.



Please consider the environment before printing.

STANDARD DRAWING INDEX

SECTION	PRIOR REF 2004	DESCRIPTION
GENERAL		
G-101		BASE MAP
G-102		LEGEND OF SYMBOLS
G-103		ABBREVIATIONS
G-104		GEODEDIC CONTROL SURVEY MARKER – TYPE A
G-105		GEODEDIC CONTROL SURVEY MARKER – TYPE B
G-106		GEODEDIC CONTROL SURVEY MARKER – ENGRAVING/STAMPING
G-107		GEODEDIC CONTROL CONCRETE SURVEY MARKER
G-108		PROJECT SIGN
ROADS		
R-101		MAJOR COLLECTOR ROAD 26m R.O.W. – 14m PAVEMENT
R-102		MINOR COLLECTOR ROAD 24m R.O.W (WITH LAY-BY LANE)
R-103		MINOR COLLECTOR ROAD 24m R.O.W. (W/O LAY-BY LANE)
R-104		LOCAL ROAD 17.5m R.O.W. – 8m PAVEMENT
R-105		BUFFER ROAD 15m R.O.W. – 7m PAVEMENT
R-106	B14	LANEWAY - 8m R.O.W. - 6m PAVEMENT
R-107		CUL-DE-SAC
R-108		ANGLE BEND
R-109		HORIZONTAL CURVE
R-110		INTERSECTION DESIGN GUIDELINES
R-111		STREET SIGNS
R-112		BREAKAWAY BOLLARD DETAIL
R-113		DEAD END BARRICADE
R-114		CONSTRUCTION TRAFFIC BARRICADES
R-115	J-1	TRAFFIC CALMING ADVANCE WARNING SIGNS
R-116		SPEED HUMP
R-117		RAISED MIDBLOCK PEDESTRIAN CROSSOVER (PXO)
R-118		RAISED INTERSECTION
R-119a		COLLECTOR/COLLECTOR ROUNDABOUT LAYOUT
R-119b		COLLECTOR/COLLECTOR ROUNDABOUT LAYOUT (W. TURNING MOVEMENT 1)
R-119c		COLLECTOR/COLLECTOR ROUNDABOUT LAYOUT (W. TURNING MOVEMENT 2)
R-120	J-6	SINGLE-LANE ROUNDABOUT – NEW DEVELOPMENT AND RE-DEVELOPMENT
R-121a		MINI-ROUNDABOUT
R-121b		MINI-ROUNDABOUT (W. TURNING MOVEMENT 1)
R-121c		MINI-ROUNDABOUT (W. TURNING MOVEMENT 2)
R-122	J-8	TRAFFIC CALMING MEDIANS
R-123	J-9	CURB EXTENSIONS AND ROAD NARROWINGS
R-124		LADDER PAVEMENT MARKING DETAIL AT SIGNALIZED INTERSECTIONS
R-125		CATCHBASIN CURB DETAIL
R-126		CURB AND SUBDRAIN DETAIL
R-127	UNDER DEVELOPMENT	UNIT PAVER CROSSWALK DETAIL
R-128		SIDEWALK AND RAMP
R-129		WALKWAYS
R-130	UNDER DEVELOPMENT	BOLLARD DETAIL
R-131		CONCRETE MULTI-USE PATH DETAIL
R-132		ACTIVE TRANSPORTATION FACILITY (MULTI-USE ASPHALT PATHWAY)
R-133		PEDESTRIAN AND CYCLING FACILITIES
R-134		MAJOR LOCAL ROAD 19m R.O.W. – 8m PAVEMENT

R-135	2-STAGE CURB AND GUTTER
R-136	PERMANENT ASPHALT SPEED CUSHIONS
R-137	RAISED UNCONTROLLED MIDBLOCK CROSSING
R-138a	TRAFFIC CIRCLE
R-138b	TRAFFIC CIRCLE (W. TURNING MOVEMENT 1)
R-138c	TRAFFIC CIRCLE (W. TURNING MOVEMENT 2)

SEWER SYSTEM

S-101		OUTFALL GRATE MAX. 900mm DIAMETER
S-102		INLET GRATE
S-103		REAR YARD CATCHBASIN GRATE
S-104	K-4	CATCHBASINS
S-105	K-5	PRECAST CATCHBASIN WITHOUT SUMP
S-106		STORM WATER FACILITY POND WARNING SIGN
S-107		SAFETY STATION FOR PONDS AND WATERWAYS
S-108	UNDER DEVELOPMENT	SIDE INLET CATCHBASIN DETAILS
S-109		IFC MAINTENANCE HOLE TAPERED TOP ASSEMBLY
S-110		PATHWAY (TYP.) – ABOVE A NON-CONVENTIONAL SWMF
S-111		ASPHALT PATHWAYS (TYP.) ABOVE A NON-CONVENTIONAL SWMF LOCATED WITHIN PARK
S-112		ARMOUR STONE (TYP.) DETAIL ABOVE A NON-CONVENTIONAL SWMF
S-113		BIKE RACK DETAIL (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-114		IDENTITY SIGNAGE (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-115		GATE (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-116		BOLLARD (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-117		TREE PLANTING (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-118		SHRUB PLANTING (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-119		EXAMPLE STORM CONNECTION DOWNSTREAM FROM A NON-CONVENTIONAL SWMF
S-120		CHAIN LINK SECURITY FENCE (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-121		PEDESTRIAN BICYCLE HAND RAIL (TYP.) DETAIL ABOVE A NON-CONVENTIONAL SWMF
S-122		ASPHALT PAVING HEAVY DUTY (TYP.) ABOVE A NON-CONVENTIONAL SWMF LOCATED WITHIN ROW
S-123		ASPHALT PAVING LIGHT DUTY (TYP.) ABOVE A NON-CONVENTIONAL SWMF LOCATED WITHIN ROW
S-124		DECORATIVE POLE (TYP.) ABOVE A NON-CONVENTIONAL SWMF
S-125		MAINTENANCE HOLE BUMP OUT FROM PEDESTRIAN PATH FOR NON-CONVENTIONAL SWMF
S-126		CONCEPTUAL STORM SEWER CONNECTION TO NON-CONVENTIONAL SWMF
S-127		CONCEPTUAL NON-CONVENTIONAL SWMF WITHIN ROW LAYOUT

WATER

W-101		SINGLE VALVE IN CHAMBER
W-102		MULTIPLE VALVE CHAMBER
W-103		AIR RELEASE VALVE CHAMBER
W-104		HYDRANT INSTALLATION
W-105		RESTRAINING OF PVC WATERMAIN AT VALVES AND FITTINGS
W-106		METER, BACKFLOW PREVENTER IN CHAMBER
W-107		METER CHAMBER FOR COPPER SERVICES
W-108		INTENTIONALLY LEFT BLANK
W-109		INDUSTRIAL/COMMERCIAL METER WITH BACKFLOW PREVENTER AND VALVE INSTALLATION (METER ROOM)
W-110		WATER VALVE OPEN/CLOSE DIRECTIONS
W-111		BACKFLOW PREVENTER & CHAMBER FOR 100mm THROUGH 300mm DOUBLE CHECK VALVE ASSEMBLY
W-112	UNDER DEVELOPMENT	TEMPORARY SUPPLY AND DISINFECTION CONNECTION
W-113		WATERMAIN BYPASS SETUP
W-114		FIRE HYDRANT CONNECTION WITH METER AND BACK FLOW PREVENTER
W-115	UNDER DEVELOPMENT	GROUNDWATER FLOW MEASURING DEVICE PIPING LAYOUT

W-116	UNDER DEVELOPMENT	GROUNDWATER SAMPLING ACCESS POINT WITH MAINTENANCE ACCESS HOLE
W-117	UNDER DEVELOPMENT	GROUNDWATER SAMPLING ACCESS POINT
W-118		AUTOMATED IRRIGATION SYSTEM FOR YORK REGION LANDSCAPE MEDIANS

CONNECTIONS


C-101	RESIDENTIAL SERVICE CONNECTIONS
C-102	BLOCK SERVICE CONNECTIONS
C-103	BLOCK WATER CONNECTION
C-104	STORM CONNECTION WITH ORIFICE CONTROL

STREET LIGHTING

SL-100a	STANDARD TRENCH FOR DIRECT BURIED CABLES
SL-100b	STANDARD STREETLIGHTING TRENCH
SL-101	INSTALLATION OF STREETLIGHT CABLE AT ROAD CROSSINGS
SL-102	STREETLIGHT WIRING CONNECTIONS
SL-103	INSTALLATION OF BOLLARD WALKWAY LIGHT SERVICE AT STREETLIGHT POLE
SL-104	STREETLIGHT PEDESTAL BASE DETAIL
SL-105	STREETLIGHT PEDESTAL DETAIL
SL-106	POLE HAND HOLE BREAKER SL1-15
SL-107	POLE HAND HOLE BREAKER SL2-15
SL-108	POLE HAND HOLE BREAKER SL1-50
SL-109	POLE HAND HOLE BREAKER SL2-50
SL-110	VICTORIAN SCROLL ARM 1.5M (5')
SL-111	VICTORIAN SCROLL ARM 1.8M (6')
SL-112	ALUMINUM ELLIPTICAL BRACKET 30' (2.5')
SL-113	ALUMINUM ELLIPTICAL BRACKET 1.83M (6')
SL-114	ALUMINUM ELLIPTICAL BRACKET 2.44M (8')
SL-115	ALUMINUM ELLIPTICAL BRACKET 3M (10')
SL-116	ALUMINIUM ELLIPTICAL BRACKET 3.65M (12')
SL-117	TAPERED ROUND CONCRETE POLE 7.6M (25')
SL-118	TAPERED ROUND CONCRETE POST TOP POLE 9.1M (30")
SL-119	TAPERED ROUND CONCRETE POLE 9.9M (32.5')
SL-120	TAPERED ROUND CONCRETE POLE 12.2M (40')
SL-121	TAPERED ROUND CONCRETE POLE 12.9 (42.5')
SL-122	TAPERED ROUND CONCRETE POLE 15.2M (50')
SL-123	DECORATIVE FLUTED OCTAGONAL (POST TOP) POLE 5.3M (17.5")
SL-124	DECORATIVE OCTAGONAL (POST TOP) POLE 6M (19.6')
SL-125	TAPERED OCTAGONAL (POST TOP) POLE 6.1M (20')
SL-126	TAPERED OCTAGONAL POLE 6.1M (20')
SL-127	TAPERED OCTAGONAL POLE 9.9M (32.5')
SL-128	DECORATIVE OCTOGONAL POLE 7.6M (25')
SL-129	DECORATIVE OCTOGONAL POLE 8.2M (27')
SL-130	DECORATIVE FLUTED OCTAGONAL POLE 9.75M (32')
SL-131	DECORATIVE MULTI-UTILITY POLE 9.9M (32.5')
SL-132	DECORATIVE OCTAGONAL POLE 11.1M (36.5')
SL-133	POLE ASSEMBY WALKWAY/PATHWAY LIGHTING 6.1M (20')


FENCING AND RETAINING WALLS

FRW-101	CHAIN LINK SECURITY FENCE
FRW-102	ACCOUSTIC WOOD FENCE
FRW-103	PRIVACY WOOD FENCE
FRW-104	ACCOUSTIC/PRIVACY FENCE NOTES
FRW-105	PEDESTRIAN/BICYCLE HAND RAIL
FRW-106	FENCE TYPES & PLACEMENT

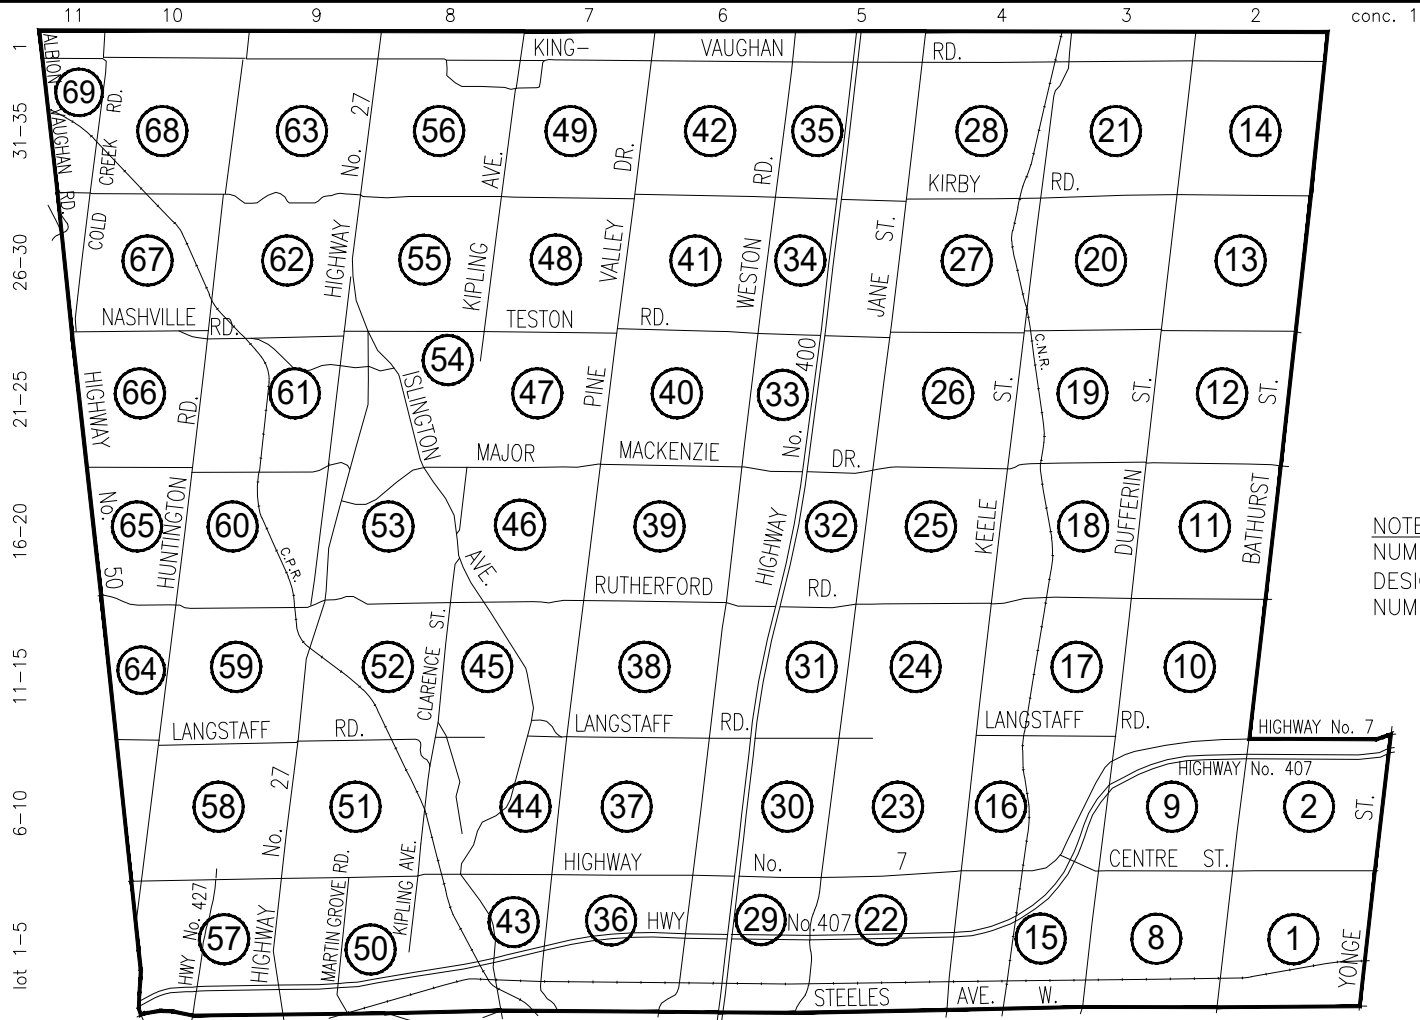

NOTE
NUMBERS IN CIRCLES ARE
DESIGNATED AS 'BLOCK'
NUMBERS.

2.		
1.		
REVISIONS		DATE
 VAUGHAN		
CITY OF VAUGHAN ENGINEERING STANDARD		
BASE MAP		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	G - 101

WATER	SEWER	ROAD												
-- (size) -- W ----- EXISTING WATERMAIN ----- (size) WATERMAIN ----- PROPOSED WATERMAIN (UP TO 675mmØ) ===== (size) WATERMAIN ===== PROPOSED WATERMAIN (OVER 675mmØ) ----- (size) VC/VB ----- VALVE CHAMBER / IN BOX ----- (size) AV ----- AIR VALVE IN CHAMBER ----- (size) DV ----- DRAIN VALVE IN CHAMBER HYD ----- HYDRANT & VALVE IN BOX ----- CS ----- CURB STOP ----->----- REDUCER ----- ----- PLUG -----J----- CAP -----Z----- CHECK VALVE -----X----- PRESSURE REDUCING VALVE	-- (size) --SAN/STM----- EXISTING SANITARY / STORM SEWER ----- (size) SANITARY/STORM SEWER ----- PROPOSED SEWER (UP TO 675mmØ) ===== (size) SANITARY/STORM SEWER ===== PROPOSED SEWER (OVER 675mmØ) ----- (size) FDC ----- FOUNDATION DRAIN COLLECTOR ----- MH ----- EXISTING MAINTENANCE HOLE ----- MH ----- PROPOSED MAINTENANCE HOLE ----->----- EXISTING DUAL MAINT. HOLE ----->----- PROPOSED DUAL MAINT. HOLE ----- CB ----- EXISTING CATCHBASIN ----- CB ----- PROPOSED CATCHBASIN ----- DCB ----- EX. DOUBLE CATCHBASIN ----- DCB ----- PR. DOUBLE CATCHBASIN FM (size) PS ----- FORCE MAIN & PUMPING STATION ----- CB/MH ----- CATCHBASIN MH ===== CONC. ENCASEMENT	/// /// /// REMOVAL SYMBOL ===== CURB & GUTTER OR CONCRETE CURB ----- (width) C.S.W. ----- CONCRETE SIDEWALK ----- (height & type) ----- FENCE ----- (type) ----- GUIDE RAIL ===== PROPERTY LINE / STREET LINE ===== DITCH / SWALE ===== EXISTING CULVERT ● S/MB SIGN / MAIL BOX HP/BP/TP/ LP/TL ● HP HYDRO POLE/BELL POLE TIE POLE/LIGHT POLE TRAFFIC LIGHT												
GENERAL  CHANGE OF ROAD GRADE (PROFILE DRAWING)  CONCRETE THRUST BLOCK  BM(number) BENCH MARK (description, location, elevation in notes)  CHANGE IN HORIZONTAL DIRECTION OF WATERMAIN (PROFILE DRAWING)  FIB/SIB/RIB PROPERTY BAR  BH(number) BORE HOLE		UNDERGROUND UTILITIES ----- G ----- GAS MAIN ----- B ----- BELL CABLE/CONDUIT ----- H ----- HYDRO CABLE ----- B & H ----- BELL & HYDRO (COMMON TRENCH) ----- PROPOSED CULVERT  <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 5%; text-align: center;">2.</td> <td style="width: 85%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td style="text-align: center;">1.</td> <td style="text-align: center;">REVISIONS</td> <td style="text-align: center;">DATE</td> </tr> </table>  CITY OF VAUGHAN ENGINEERING STANDARD LEGEND OF SYMBOLS <table style="width: 100%; margin-top: 10px;"> <tr> <td style="width: 33%;">NOT TO SCALE</td> <td style="width: 33%;">DESIGNED: _____</td> <td style="width: 34%; text-align: center;">STD. DWG.</td> </tr> <tr> <td>REVISION: _____</td> <td>DATE: DEC. 2020</td> <td style="text-align: center; font-size: 1.2em;">G - 102</td> </tr> </table>	2.			1.	REVISIONS	DATE	NOT TO SCALE	DESIGNED: _____	STD. DWG.	REVISION: _____	DATE: DEC. 2020	G - 102
2.														
1.	REVISIONS	DATE												
NOT TO SCALE	DESIGNED: _____	STD. DWG.												
REVISION: _____	DATE: DEC. 2020	G - 102												

[illegible]

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

ABBREVIATIONS

NOT TO SCALE DESIGNED: _____

REVISION: DATE: DEC. 2020

STD. DWG.
G - 103


Diagram of a mechanical part with dimensions: 2mm, R=8mm, R=2.5mm, and 10mm.

MATERIAL - BRASS OR BRONZE WITH
NOT LESS THAN 83%
COPPER CONTENT.
B METAL 0.78 lbs.



1. REFER TO DRAWING STD. G-106 FOR
ENGRAVING / STAMPING DETAILS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

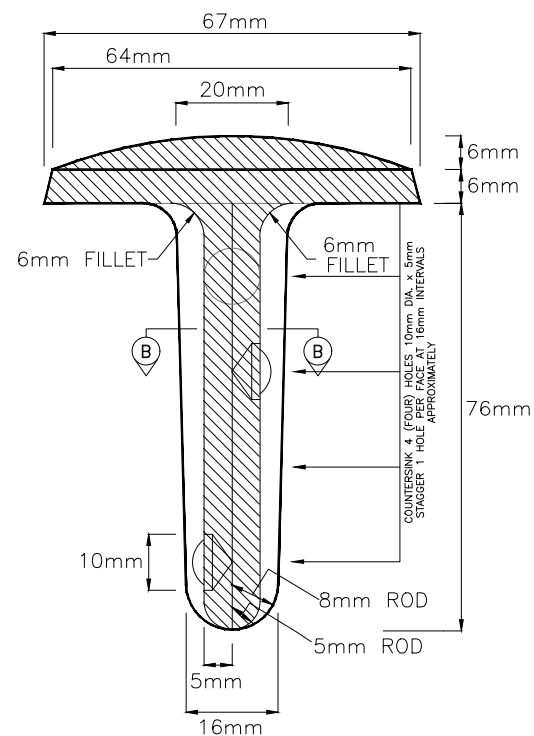

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

GEODETIC CONTROL
SURVEY MARKER - TYPE A



NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: DEC. 2020

STD. DWG.

G - 104


FILE: O:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\ColStandardDrawings_CAD_2021\G-105 - Geodetic Control Survey Marker Type B.dwg

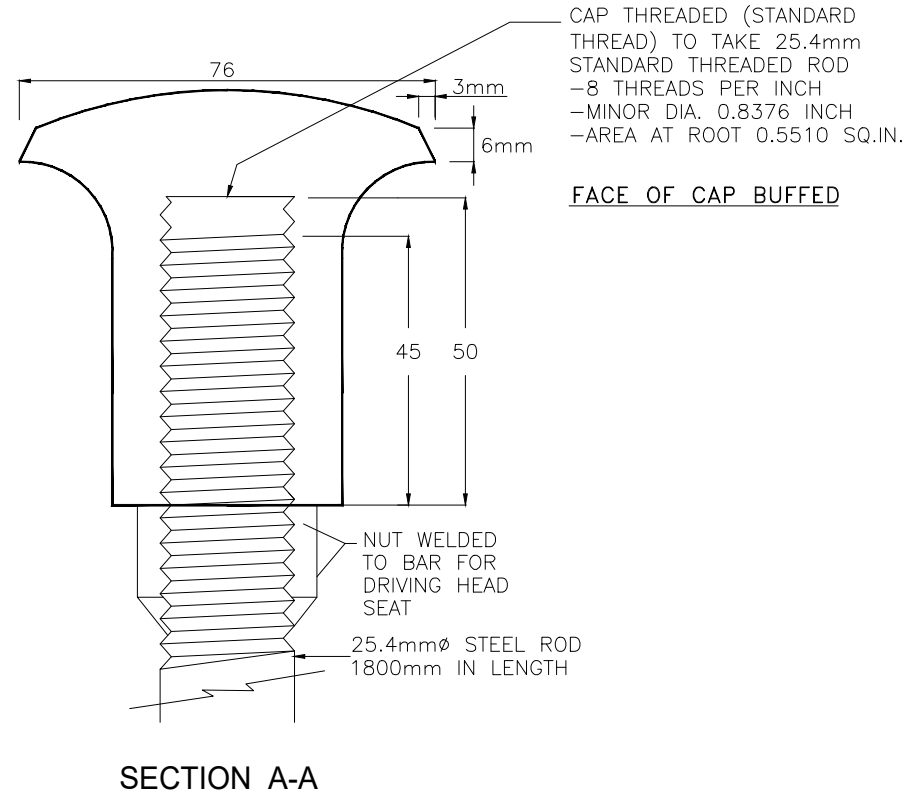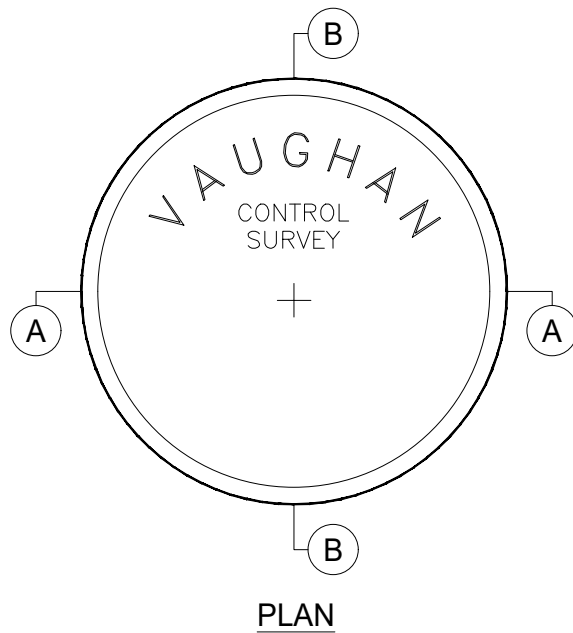

NOTE

1. REFER TO DRAWING STD. G-106 FOR ENGRAVING / STAMPING DETAILS.


MATERIAL - BRASS OR BRONZE WITH NOT LESS THAN 83% COPPER CONTENT.
B METAL 2 32 lbs.

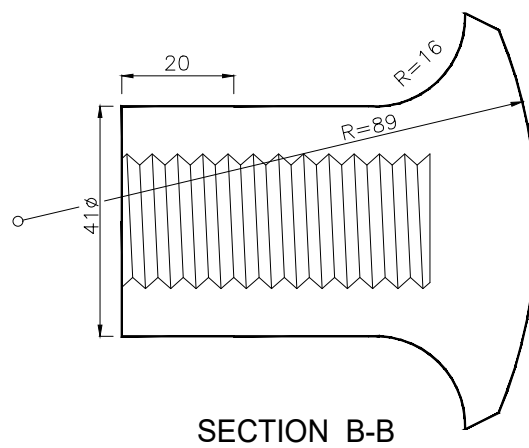

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
GEODETIC CONTROL SURVEY MARKER - TYPE B		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	G - 105

FILE: O:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\ColStandardDrawings_CAD_2021\G-106 - Geodetic Control Survey Marker Engraving+Stamping.dwg

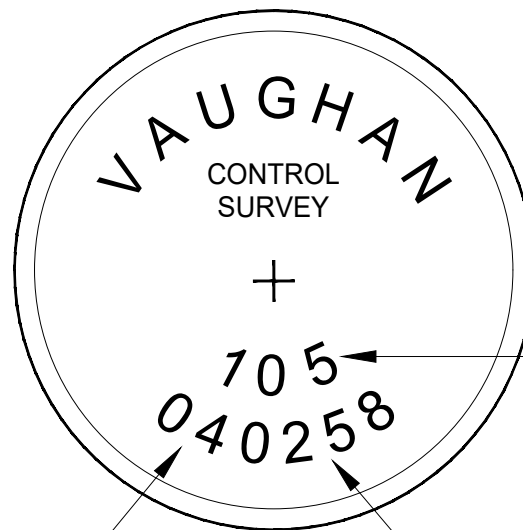

2 DIGIT YEAR

CITY CODE NUMBER

4 DIGIT MONUMENT NUMBER

PLAN VIEW

LETTER STYLE - STANDARD GOTHIC

LETTER SIZE - 5mm STROKE CENTRE
TO STROKE CENTRE;
6mm EDGE TO EDGE FOR
OUTER INSCRIPTION
3mm STROKE CENTRE
TO STROKE CENTRE;
3mm EDGE TO EDGE FOR
INNER INSCRIPTION

LETTER DEPTH - 1mm

LETTER TAPERED 20° PER SIDE

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

GEODETIC CONTROL
SURVEY MARKER ENGRAVING / STAMPING

NOT TO SCALE

DESIGNED: _____


REVISION: _____

DATE: DEC. 2020

STD. DWG.

G - 106

FILE: 0:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards Drawings_CAD_2021\G-107 - Geodetic Control Concrete Survey Marker.dwg

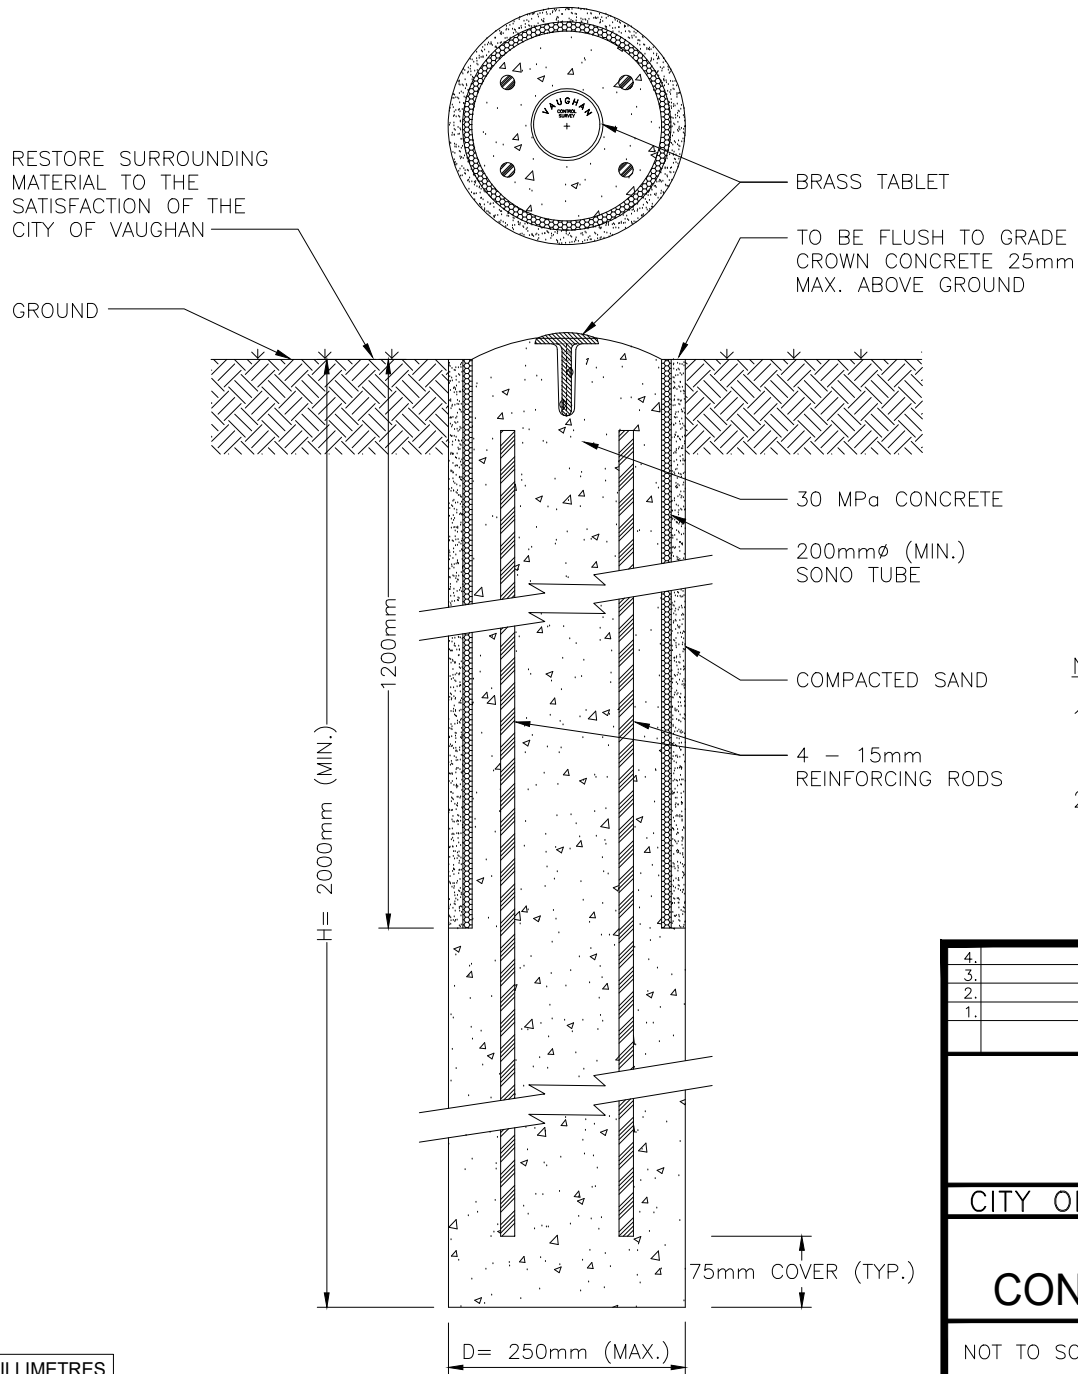

NOTE


1. REFER TO DRAWING STD. G-106 FOR ENGRAVING / STAMPING DETAILS.
2. REFER TO DRAWING STD. G-104 FOR BRASS TABLET DETAILS.

4.		
3.		
2.		
1.		
REVISIONS		DATE
 VAUGHAN		
CITY OF VAUGHAN ENGINEERING STANDARD		
GEODETIC CONTROL CONCRETE SURVEY MARKER		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	G - 107

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards\Drawings_CAD_2021\G-108 - Project Sign.dwg

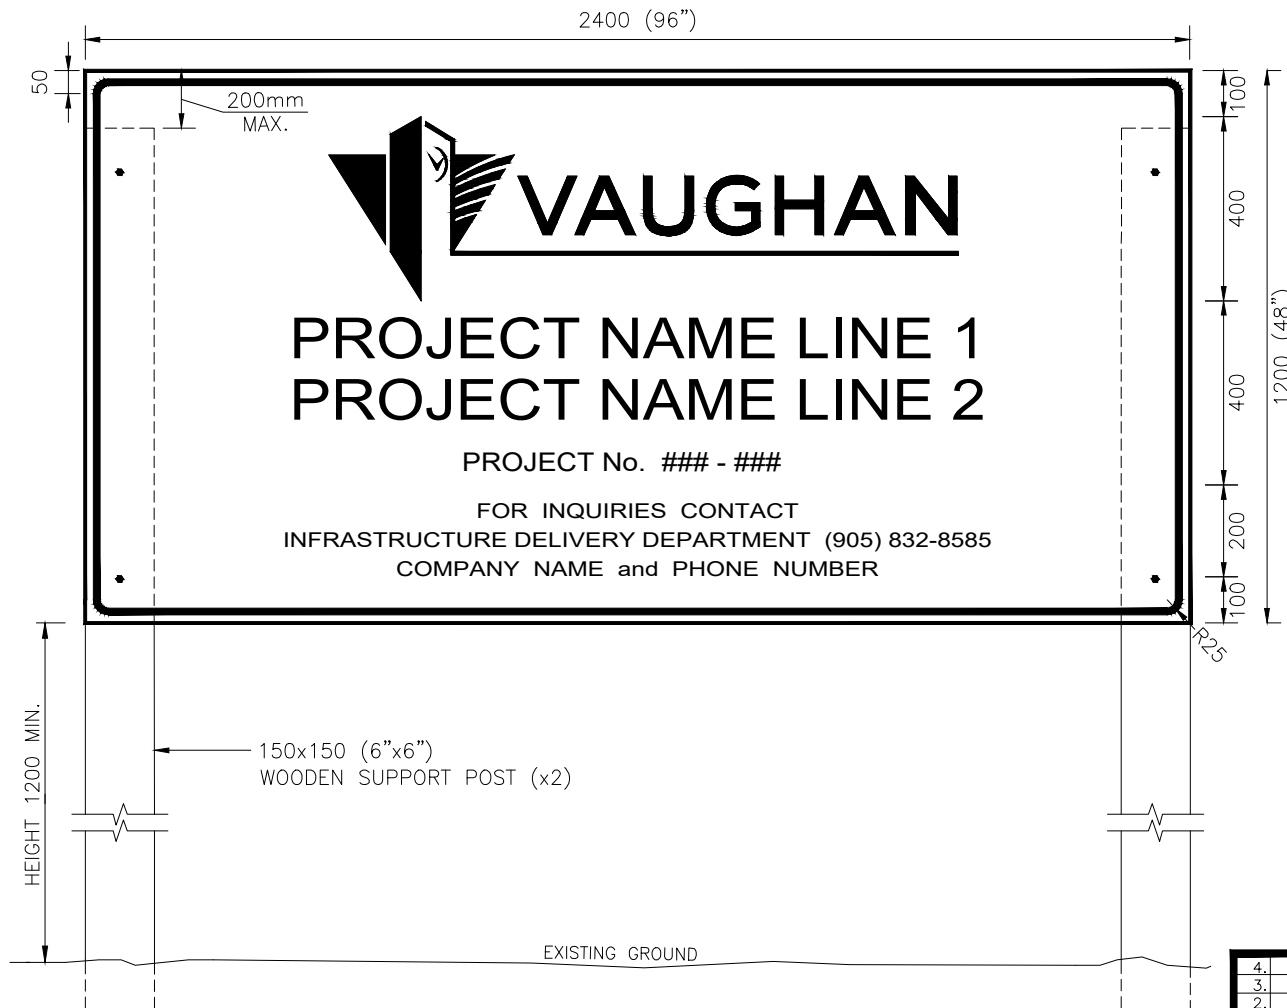

NOTES

1. PROJECT TITLE & CONTRACT NUMBER TO BE PROVIDED BY THE CITY.
2. COMPANY NAME & NUMBER TO BE CONFIRMED.
3. MINIMUM 20mm THICK PLYWOOD SIGN.
4. WOODEN SUPPORT POSTS TO BE INSTALLED AS PER OPSD 985.220

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

SIGN COLOURS & FONTS

BACKGROUND: WHITE

CITY LOGO:

GRAPHIC AVAILABLE ON CITY WEB SITE
PANTONE 376 GREEN
PANTONE 294 BLUE

EDGE STRIPE:

WIDTH-15mm, PANTONE 294 BLUE
CORNER RADIUS-25mm

PROJECT NAME: (TWO LINES PREFERRED)

UNIVERS 65 BOLD-250 pt, PANTONE 294 BLUE, UPPER CASE
LINE 1: PRIMARY STREET WHERE WORK IS TAKING PLACE e.g. "MCKENZIE STREET"
LINE 2: PROJECT TYPE (PRIMARY WORK) e.g. "WATERMAIN REPLACEMENT"

CONTRACT NUMBER: (1 LINE)

UNIVERS 55 ROMAN BOLD-115 pt, PANTONE 294 BLUE, UPPER CASE

CONTACT INFORMATION: (3 LINES)

UNIVERS 55 ROMAN BOLD-90 pt, PANTONE 294 BLUE, UPPER CASE



CITY OF VAUGHAN ENGINEERING STANDARD

PROJECT SIGN

NOT TO SCALE

DESIGNED: _____


REVISION: _____

DATE: _____ DEC. 2020

STD. DWG.

G - 108

4.		
3.		
2.		
1.		
REVISIONS		DATE

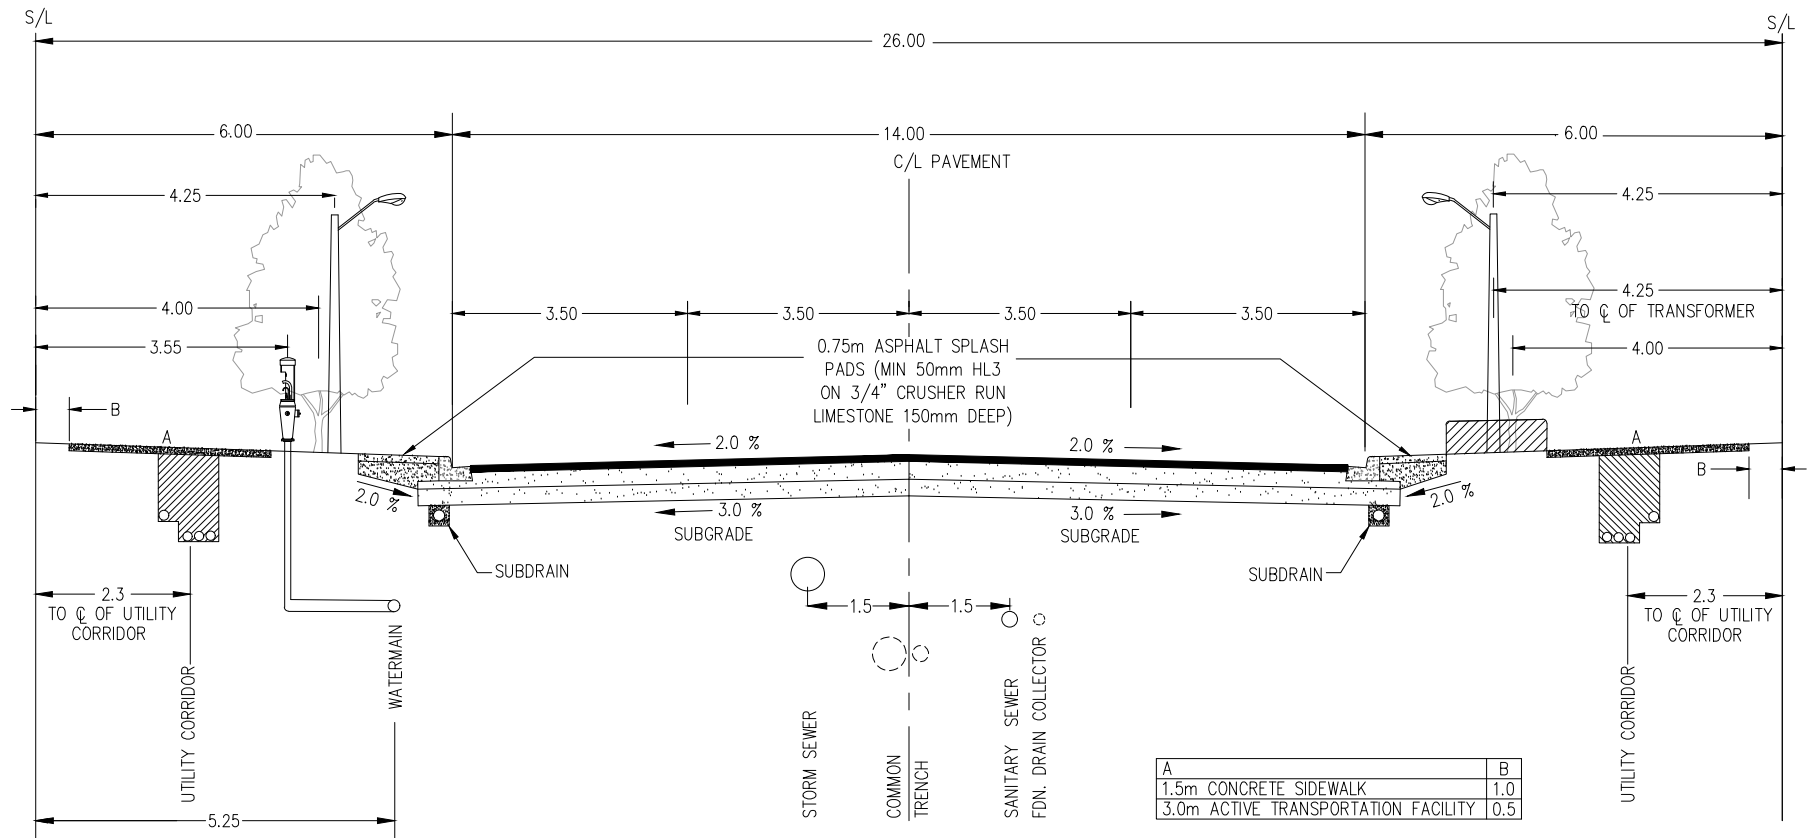

NOTES

- PAVEMENT WIDTH IS DESIGNED TO ACCOMMODATE 4 TRAVEL LANES OR 2 TRAVEL LANES WITH 2 PARKING LANES.
- PAVEMENT DESIGN SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
- ACTIVELY GROWING No. 1 NURSERY SOD TO BE LAID ON 150mm OF TOPSOIL, PROPERLY GRADED AND ROLLED.
- DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.
- LINE WIDTH AND COLOR TO CONFORM TO THE STD. DWG. R-112.
- FOR ACTIVE TRANSPORTATION FACILITY LINE PAINTING DETAILS PLEASE REFER TO O.T.M. BOOK 11 (FIG 39 & 40) & BOOK 18 (FIG 4.26)
- ASPHALT ACTIVE TRANSPORTATION FACILITY TO BE COMPOSED OF 75mm COMPACTED DEPTH HL3 ASPHALT LAID ON A 200 mm THICK COMPACTED 19mm CLEAR BASE.
- REFER TO BIKEWAY TRAFFIC CONTROL GUIDELINES FOR CANADA (LATEST EDITION, TAC, 2012 & O.T.M. BOOK 18) FOR TYPICAL TRAIL CROSSING APPLICATIONS.
- CONCRETE ACTIVE TRANSPORTATION FACILITY MAY BE REQUIRED BY CITY IN CERTAIN INSTANCES, THE DESIGN FOR WHICH MUST BE CERTIFIED BY A LICENSED PROFESSIONAL ENGINEER.
- LINE PAINTING OF ACTIVE TRANSPORTATION FACILITY AT OPTION OF CITY.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

MAJOR COLLECTOR ROAD

26m R.O.W. - 14m PAVEMENT

NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2019	R - 101

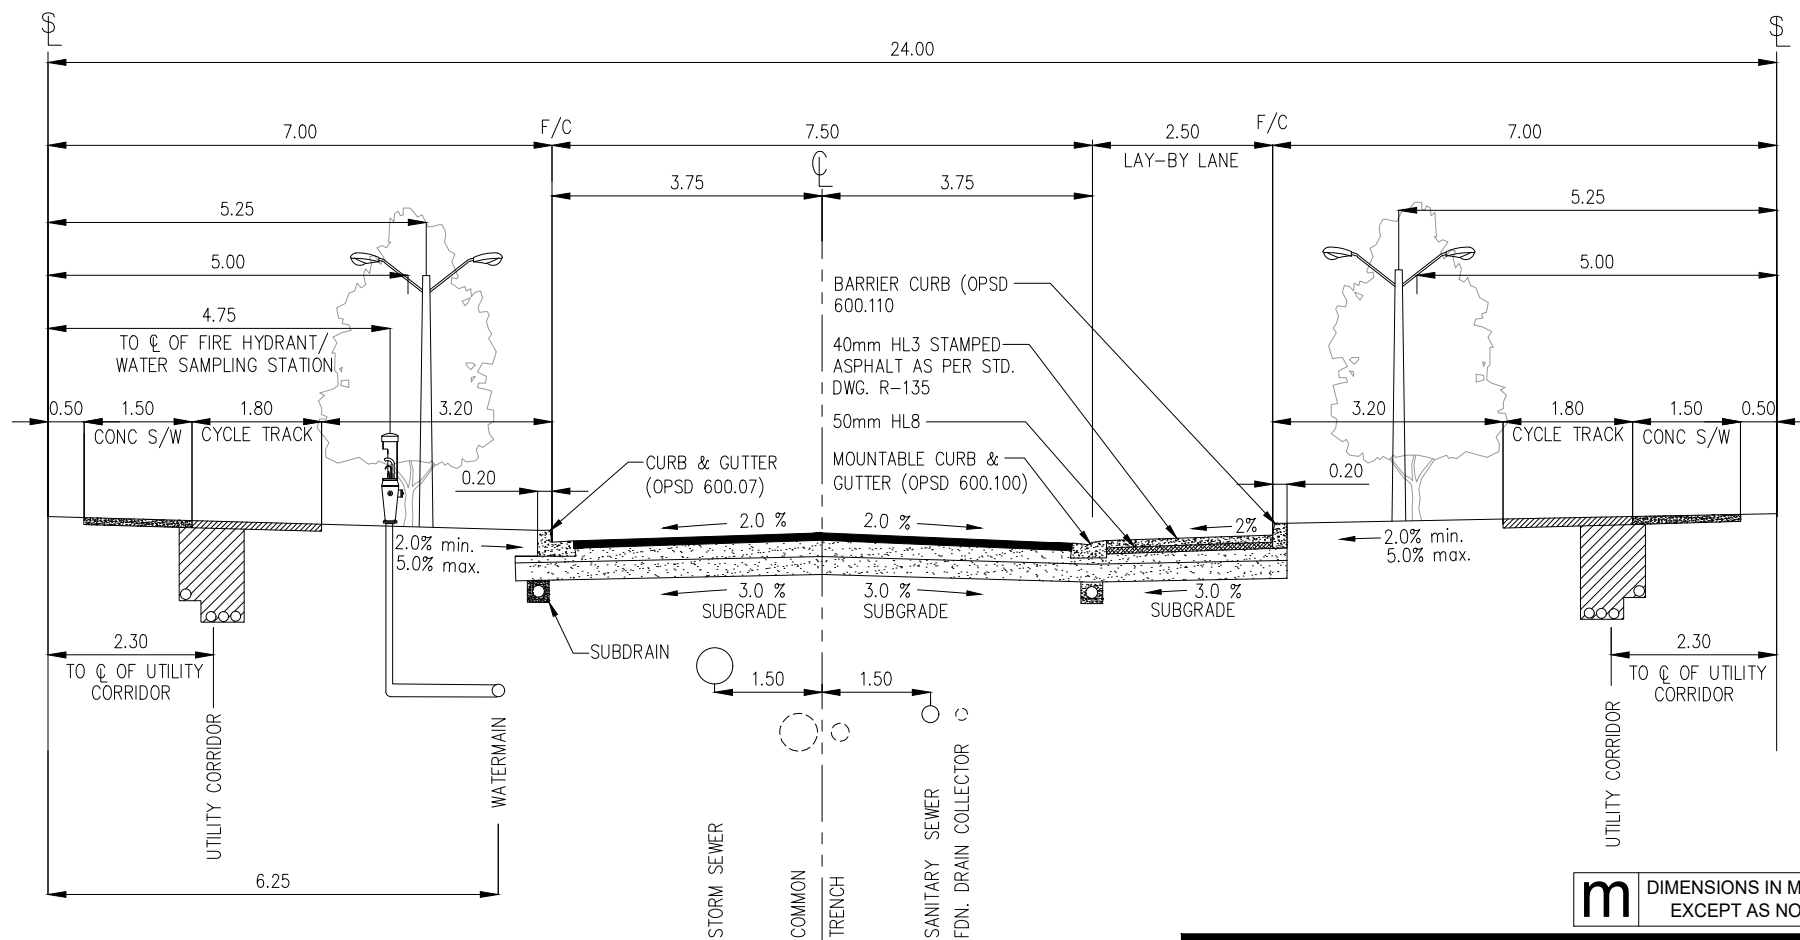

NOTES

1. PAVEMENT DESIGN SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
2. ACTIVELY GROWING No. 1 NURSERY SOD TO BE LAID ON 150mm OF TOPSOIL, PROPERLY GRADED AND ROLLED.
3. DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.
4. COLOR AND PATTERN OF CONCRETE UNIT PAVERS TO BE APPROVED BY THE ENGINEERING DEPARTMENT IN CONSULTATION WITH THE URBAN DESIGN DEPARTMENT.
5. REFER TO BIKEWAY TRAFFIC CONTROL GUIDELINES FOR CANADA (LATEST EDITION, TAC & O.T.M., YORK REGION) FOR TYPICAL BICYCLE FACILITY SPECIFICATIONS INCLUDING PAVEMENT MARKING & SIGNAGE AND INTERSECTION APPLICATION.
6. THE DEDICATED CYCLE TRACK WIDTH OF 1.8m SHOULD BE ACCOMMODATED WHERE POSSIBLE
7. WHERE RAISED PLANTER OR VERTICAL OBJECT WILL ABUT THE CYCLE TRACK, 0.5m OF CLEARANCE MUST BE PROVIDED.
8. THE SUBSTITUTION OF SEPARATED PEDESTRIAN AND CYCLING FACILITIES INSTEAD OF COMBINED FACILITIES IS ACCEPTABLE. THE DESIGN OF THE ACTIVE TRANSPORTATION FACILITIES SHOULD BE CONFIRMED WITH CITY STAFF.
9. PARKING PERMITTED WITHIN THE LAY-BY-LANE.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

MINOR COLLECTOR ROAD
24m R.O.W. (WITH LAY-BY LANE)


NOT TO SCALE DESIGNED: _____

REVISION: DATE: JAN. 2022

STD. DWG.

R - 102

\\fs1\vaughan\Infrastructure\Delivery\Infrastructure Programming\WMO City Standards\Design Criteria\2020-21 City Standards Update\Folder\CollateralDrawings_2021\B-103 - Minor Collector Road - 24m ROW - w.o. Lay-By Lane.dwg

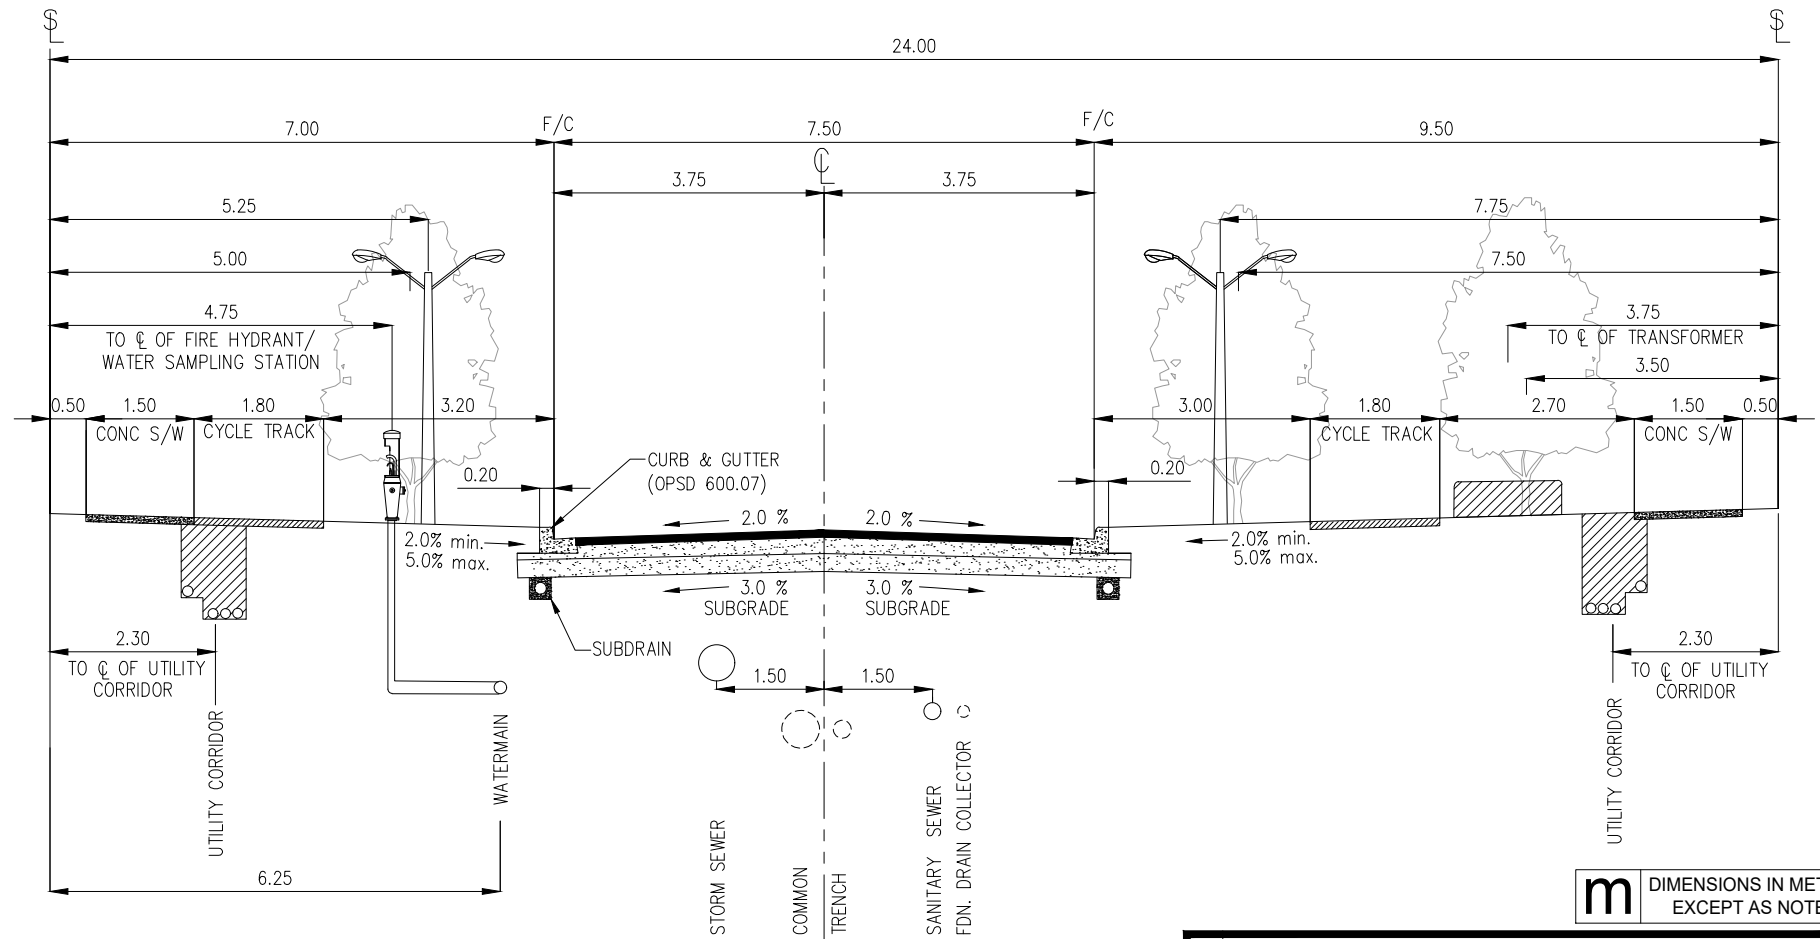


NOTES

1. PAVEMENT DESIGN SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
2. ACTIVELY GROWING No. 1 NURSERY SOD TO BE LAID ON 150mm OF TOPSOIL, PROPERLY GRADED AND ROLLED.
3. DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.
4. COLOR AND PATTERN OF CONCRETE UNIT PAVERS TO BE APPROVED BY THE ENGINEERING DEPARTMENT IN CONSULTATION WITH THE URBAN DESIGN DEPARTMENT.
5. REFER TO BIKEWAY TRAFFIC CONTROL GUIDELINES FOR CANADA (LATEST EDITION, TAC & O.T.M., YORK REGION) FOR TYPICAL BICYCLE FACILITY SPECIFICATIONS INCLUDING PAVEMENT MARKING & SIGNAGE AND INTERSECTION APPLICATION.
6. THE DEDICATED CYCLE TRACK WIDTH OF 1.8m SHOULD BE ACCOMMODATED WHERE POSSIBLE.
7. WHERE RAISED PLANTER OR VERTICAL OBJECT WILL ABUT THE CYCLE TRACK, 0.5m OF CLEARANCE MUST BE PROVIDED.
8. THE SUBSTITUTION OF SEPARATED PEDESTRIAN AND CYCLING FACILITIES INSTEAD OF COMBINED FACILITIES IS ACCEPTABLE. THE DESIGN OF THE ACTIVE TRANSPORTATION FACILITIES SHOULD BE CONFIRMED WITH CITY STAFF.
9. PARKING NOT PERMITTED ON THE ROADWAY.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
MINOR COLLECTOR ROAD		
24m R.O.W. (W/O LAY-BY LANE)		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: JUN. 2021	R - 103

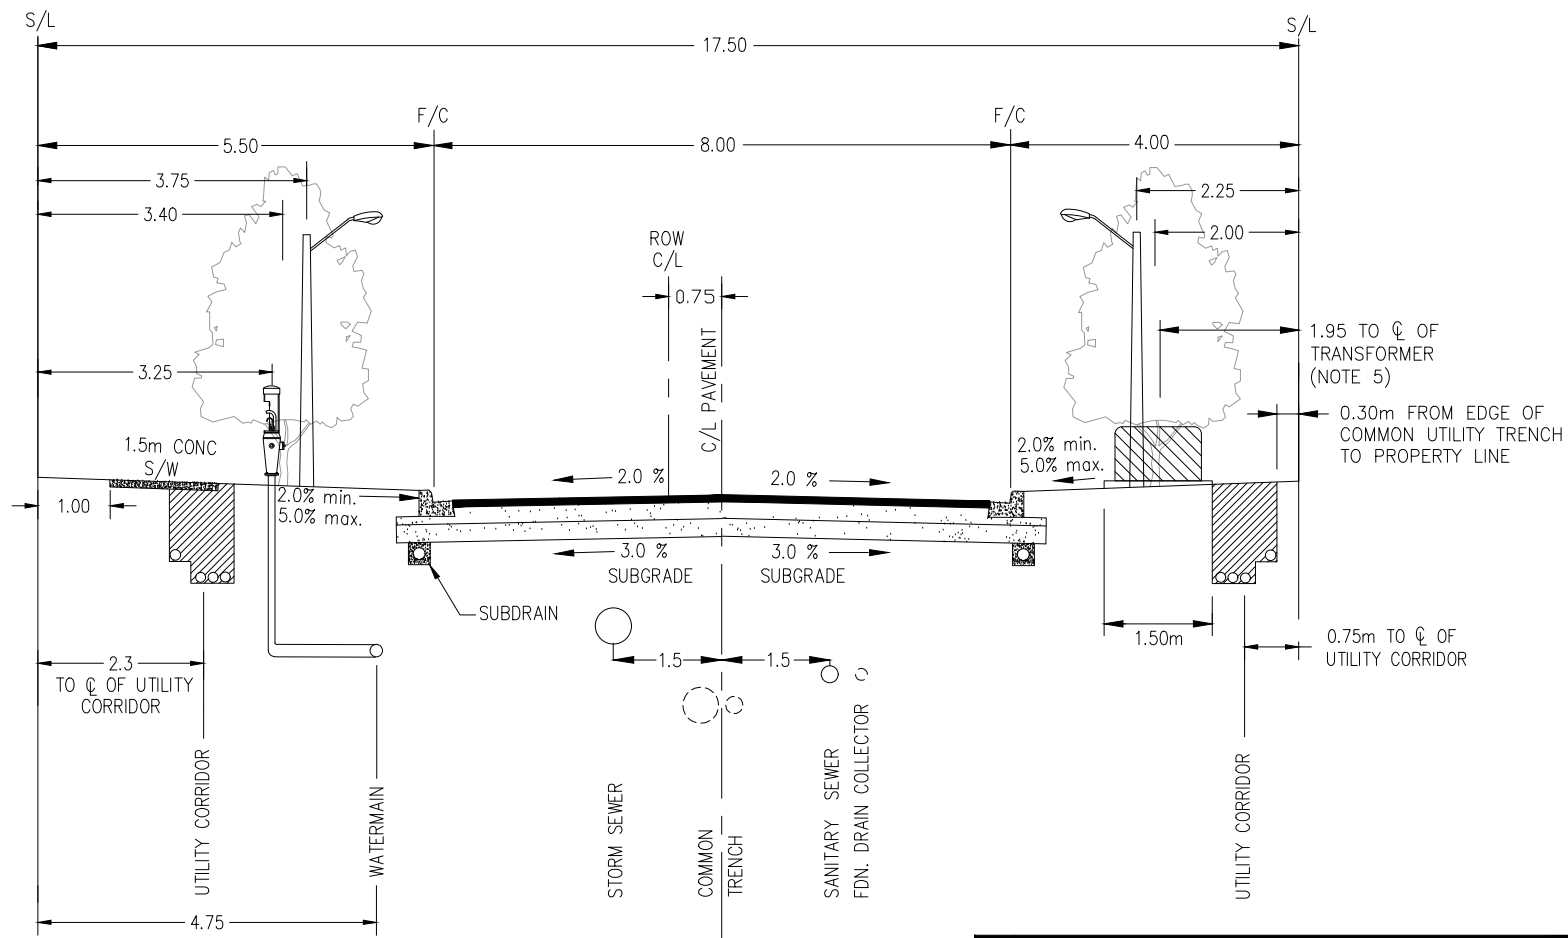

NOTES

1. PAVEMENT WIDTH IS DESIGNED TO ACCOMMODATE 2 TRAVEL LANES WITH 1 PARKING LANE.
2. PAVEMENT DESIGN SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
3. ACTIVELY GROWING No. 1 NURSERY SOD TO BE LAID ON 150mm OF TOPSOIL, PROPERLY GRADED AND ROLLED.
4. DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.
5. IF TRANSFORMER IS ON SIDE LOT, TURN FOUNDATION 90° TO FACE ONCOMING TRAFFIC INSTALL 1.70m TO CENTER OF FOUNDATION.
6. TRANSFORMER FOUNDATION TO ABUT EDGE OF TRENCH.

4.		
3.		
2.		
1.		
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD

LOCAL ROAD
17.5 m R.O.W. - 8m PAVEMENT

NOT TO SCALE DESIGNED: _____
REVISION: _____ DATE: 2019

m DIMENSIONS IN METRES
EXCEPT AS NOTED

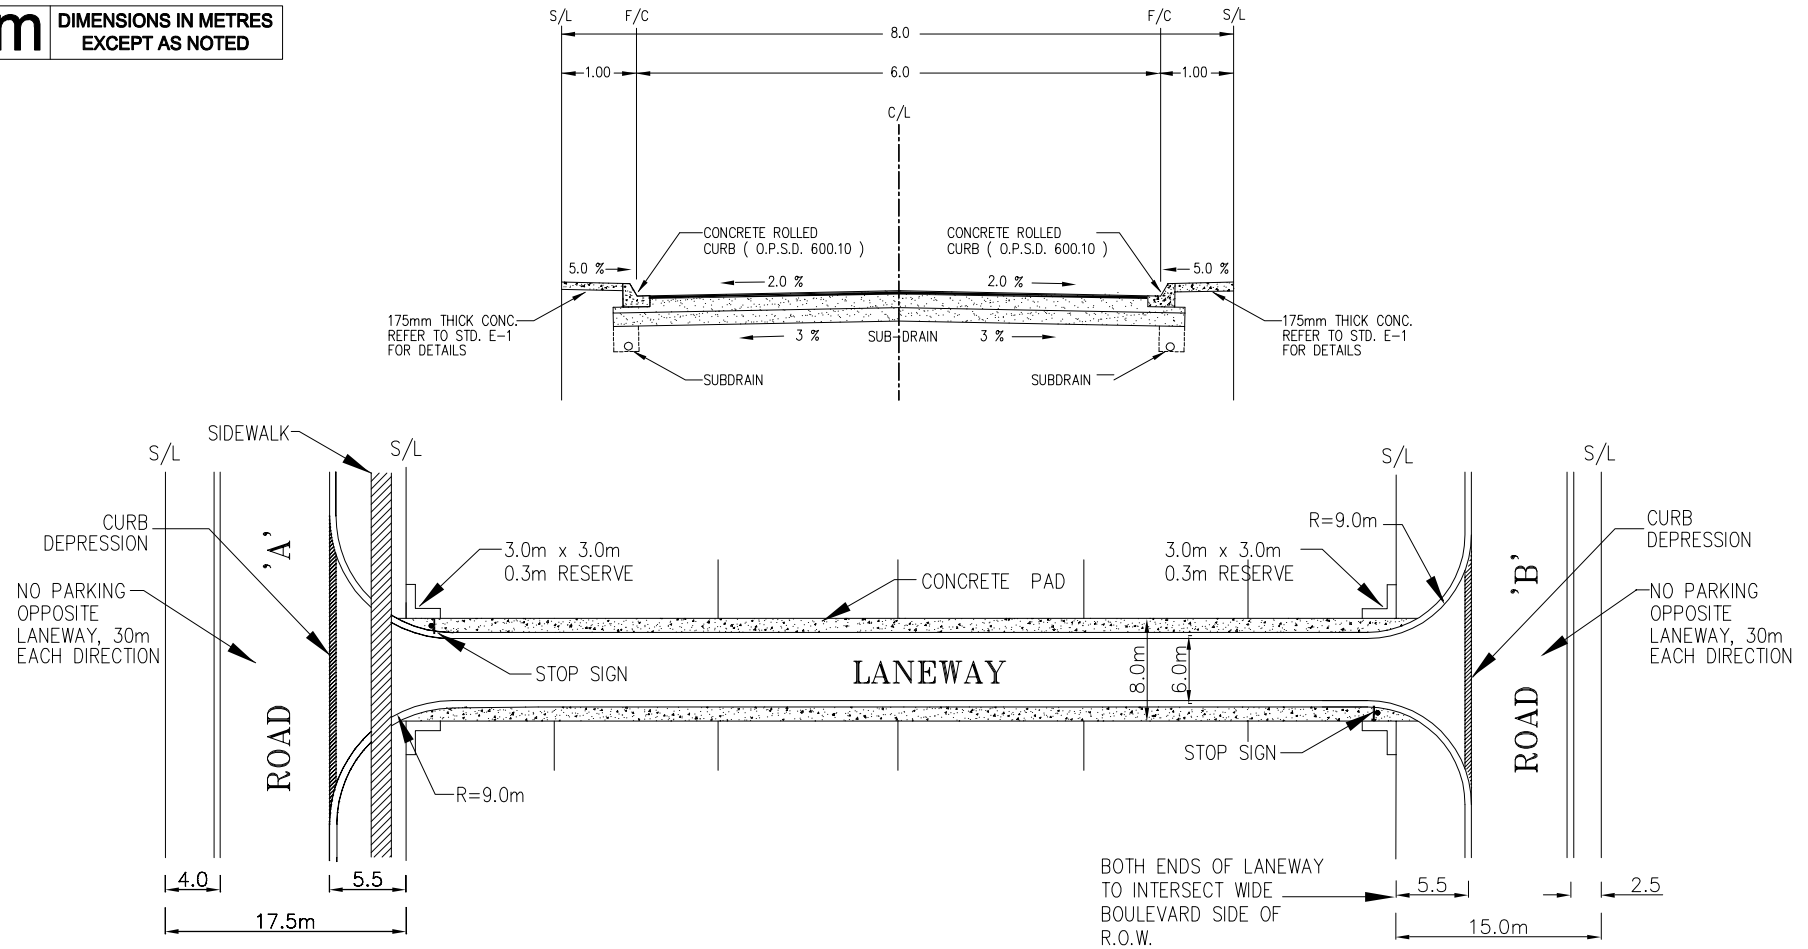

NOTES

1. STOP SIGN SIZE 60cm x 60cm INTERSECTING (15.0m/17.5m/20.0m/23.0m) R.O.W.
2. "NO PARKING FIRE ROUTE" SIGNS TO BE INSTALLED AT ENTRY POINTS AND LOCATED 45.0m APART THEREAFTER (WHENEVER POSSIBLE).
3. ALL SIGNS TO BE INSTALLED ON U—CHANNEL GALVANIZED STEEL POSTS.
4. STREET NAME SIGNS TO ON 150mm DOUBLE FACED ALUMINUM BLADES (REFLECTORIZED).
5. ALL REGULATORY SIGNS MANUFACTURED USING HIGH INTENSITY SHEETING.
6. LUMINAIRES TO BE PROVIDED ON GARAGES WHERE APPLICABLE.
7. PAVEMENT DEPTH SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
8. DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.

4.		
3.		
2.		
1.		
	REVISIONS	DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
LANEWAY 8m R.O.W. - 6m PAVEMENT		
NOT TO SCALE	DESIGNED: <u>ENG. DEPT.</u>	STD. DWG.
REVISION: _____	DATE: <u>MARCH 2004</u>	B - 14

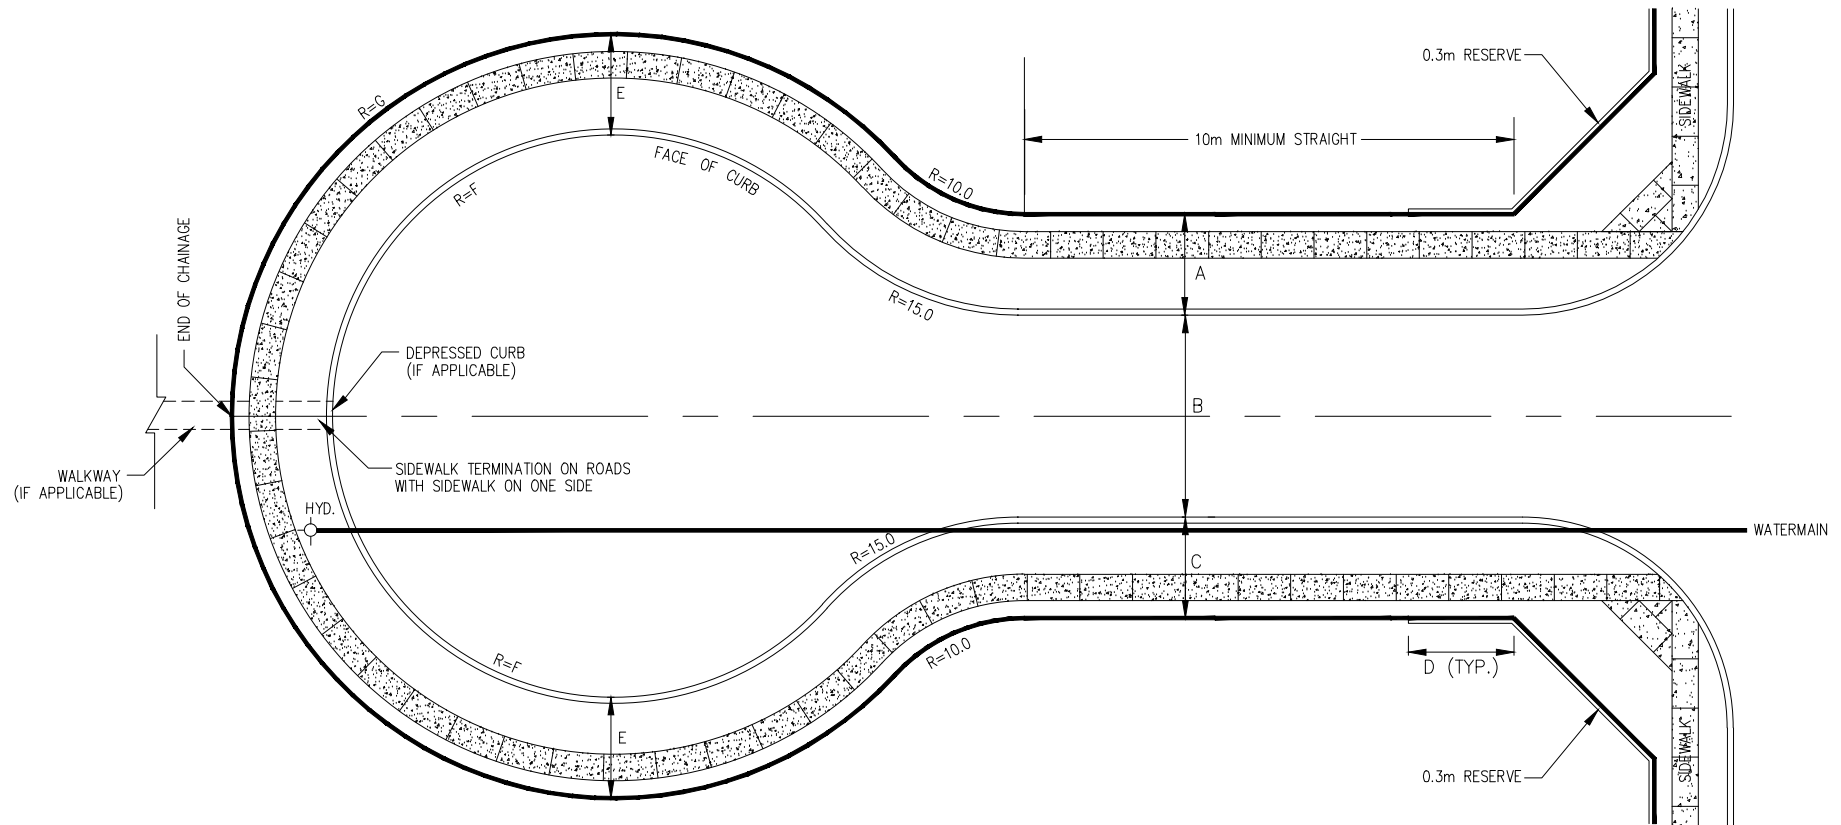


TABLE:

	R.O.W.	A	B	C	D	E	F	G
MINOR COLLECTOR/INDUSTRIAL ROAD	24.0m	5.5	10.5	8.0	6.0*	5.5	16.0	21.5
LOCAL ROAD	17.5m	4.0	8.0	5.5	3.0	5.5	13.25	18.75

NOTES

1. AT THE CURB, THERE SHALL BE A MIN. 1.0m BARRIER CURB BETWEEN EVERY DRIVEWAY AROUND THE BULB OF THE CUL-DE-SAC.
2. HYDRANT TO BE LOCATED AT THE END OF THE WATERMAIN, AS CLOSE TO THE END OF THE CUL-DE-SAC AS POSSIBLE.
3. MINIMUM 0.7% GUTTER GRADE.
4. MAXIMUM 40 UNITS ON CUL-DE-SAC.



DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.	*REVISED/UPDATED TABLE	11/24
	REVISIONS	DATE

CITY OF VAUGHAN ENGINEERING STANDARD

CUL-DE-SAC

NOT TO SCALE

DESIGNED: _____


STD. DWG.

REVISION: 1

DATE: JUN. 2021

R - 107

FILE: O:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards Drawings_CAD_2021\R-108 - Angle Bend.dwg

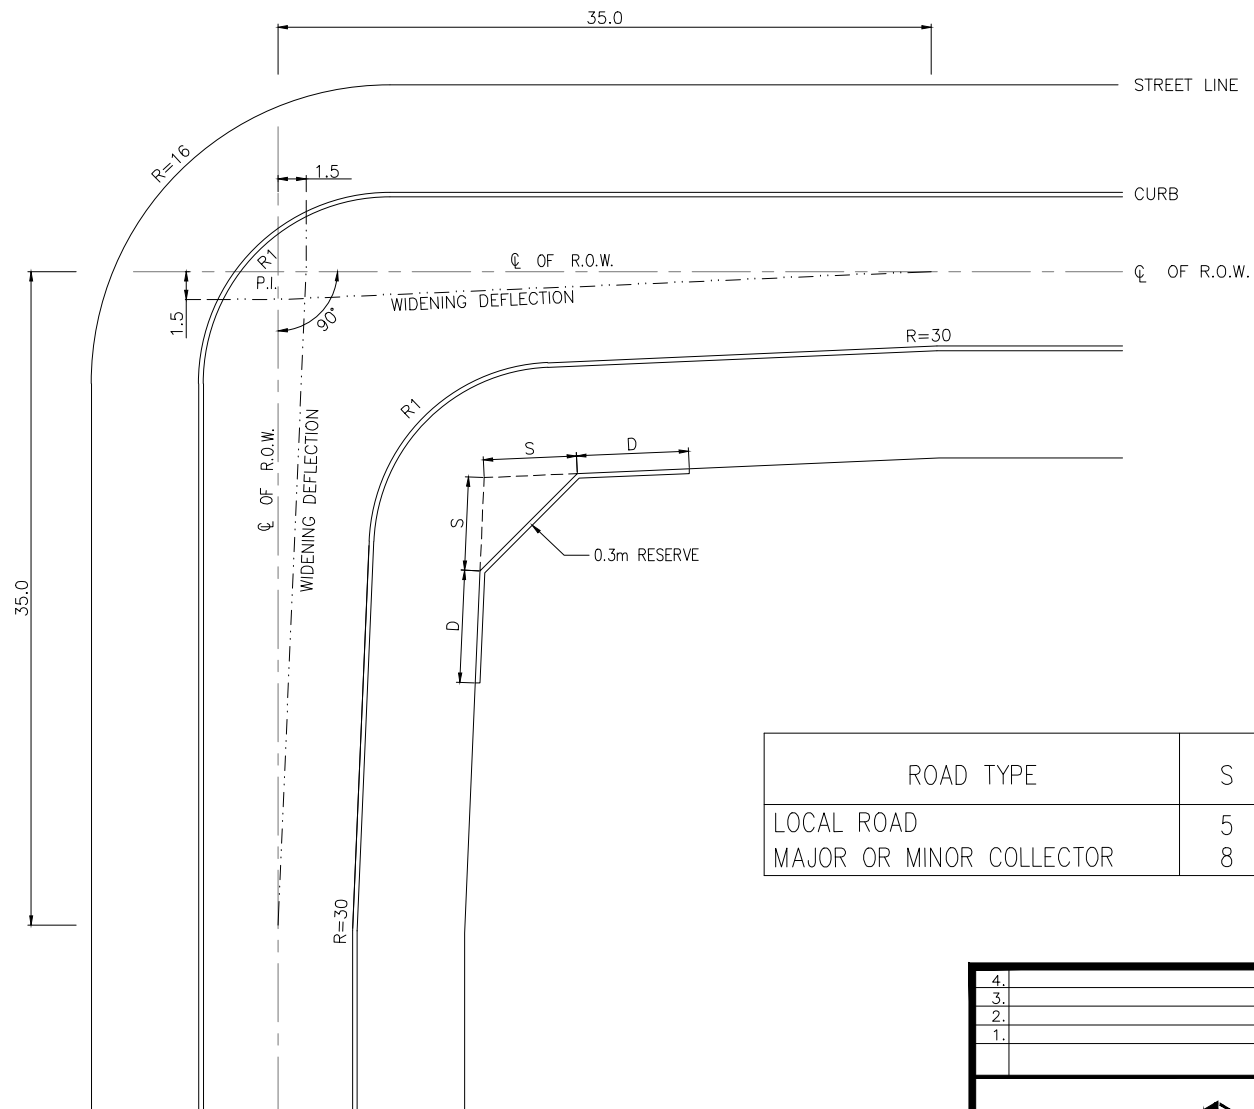

ROAD TYPE	S	D	RI
LOCAL ROAD	5	—	10
MAJOR OR MINOR COLLECTOR	8	6	12


NOTES

1. MINIMUM 0.7% GUTTER GRADE.
2. BOULEVARD WIDTHS TO BE MAINTAINED AS PER ROAD CROSS-SECTION DETAILS.
3. APPLICABLE ONLY TO ROADS BELOW MAJOR COLLECTOR STATUS.
4. AT THE CURB ON THE OUTSIDE OF THE BEND THERE SHALL BE A MINIMUM 1.0m SPACE BETWEEN EVERY SECOND DRIVEWAY.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
ANGLE BEND		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	R - 108

FILE: C:\Users\audimop\CITY OF VAUGHAN\City Standards - General\Design Criteria 2024\Dev - Standards\CD R-109 - Horizontal Curved.dwg

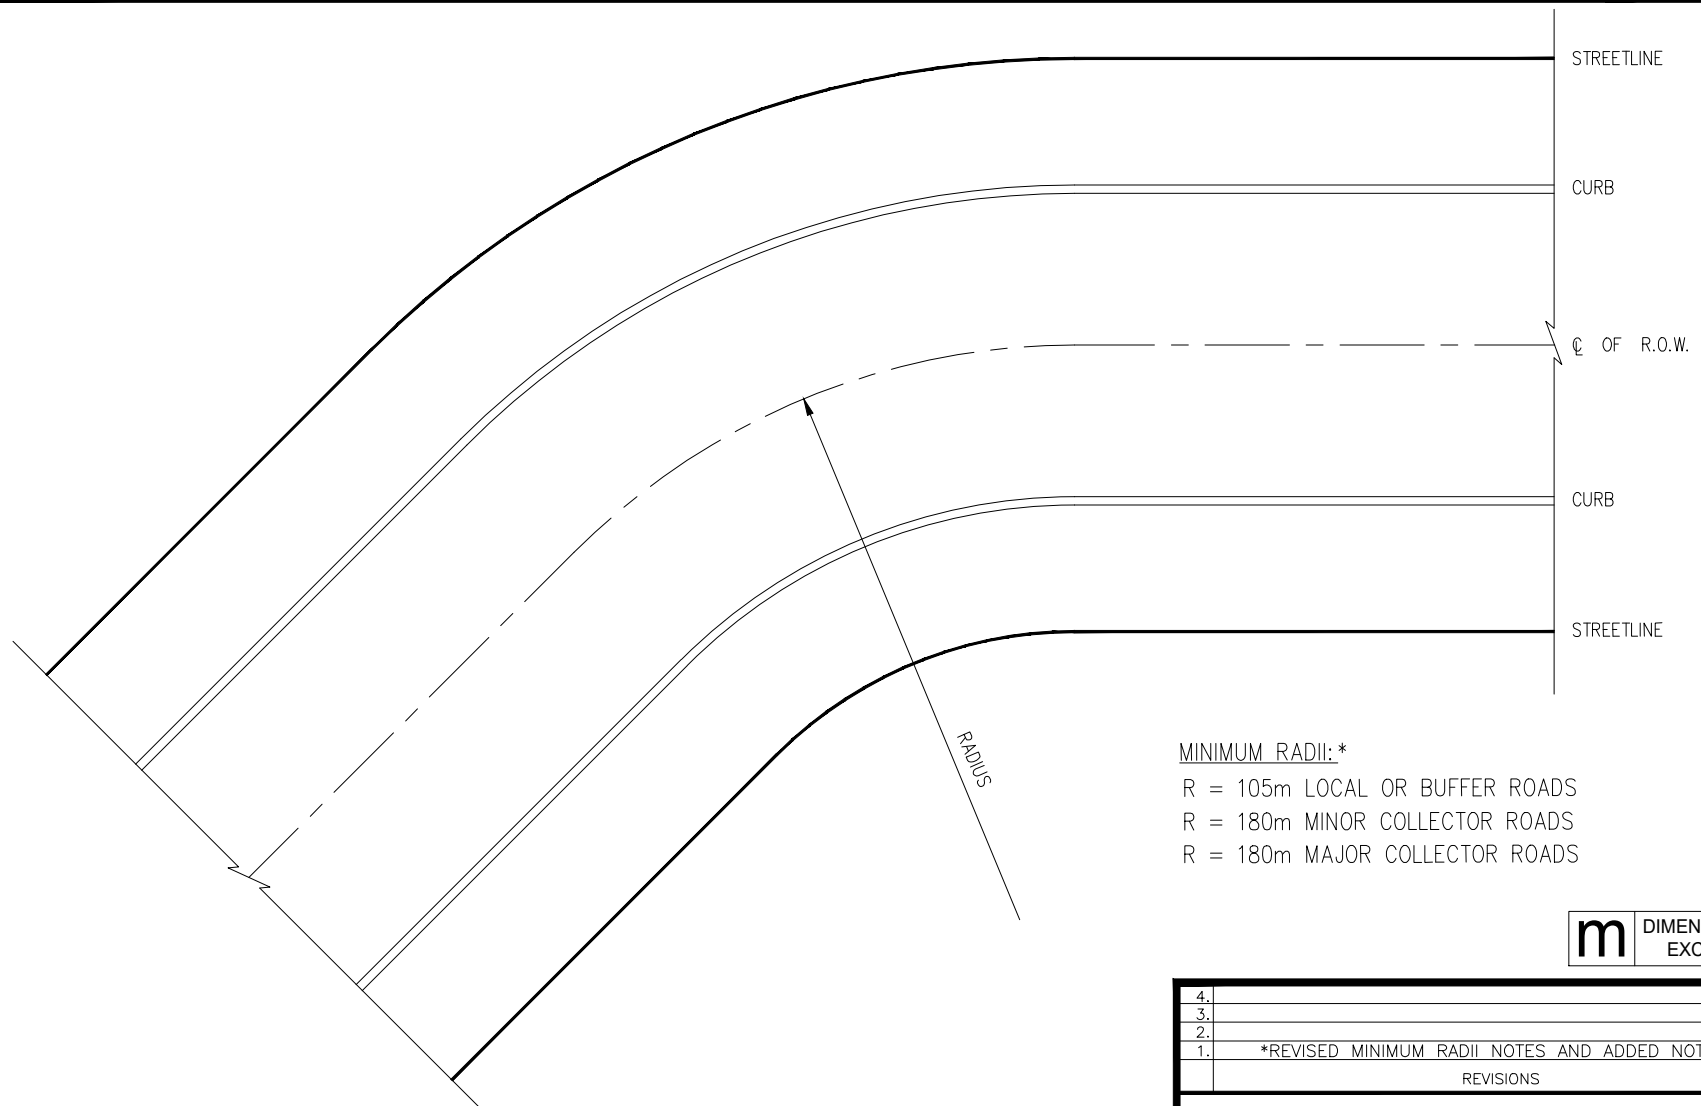

MINIMUM RADII: *

- R = 105m LOCAL OR BUFFER ROADS
- R = 180m MINOR COLLECTOR ROADS
- R = 180m MAJOR COLLECTOR ROADS

m DIMENSIONS IN METRES
EXCEPT AS NOTED

NOTES:

1. BOULEVARD WIDTHS TO BE MAINTAINED AS PER ROAD CROSS-SECTION DETAILS THROUGHOUT THE CURVE.
2. 20m MINIMUM STRAIGHT R.O.W. BEYOND/BETWEEN CURVES.
3. FOR OTHER CURB RADII REFER TO DESIGN CRITERIA.
4. VALUES PROVIDED RELATE TO CROWN ROADWAY SECTIONS AND THE VALUES REFLECT NORMAL CROWN. VALUES MAY BE REDUCED IN CONSULTATION WITH THE CITY BY WAY OF APPLYING ROADWAY SUPER-ELEVATION OR REDUCING DESIGN SPEED UPON APPROVAL BY THE CITY.*

4.		
3.		
2.		
1.	*REVISED MINIMUM RADII NOTES AND ADDED NOTE #4	11/24
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

HORIZONTAL CURVE

NOT TO SCALE DESIGNED: _____

REVISION: 1 DATE: DEC. 2020

STD. DWG.

R - 109

NOTES

1. ALL ROADS TO INTERSECT AT 90°.
2. MAJOR AND MINOR LEGS OF THE INTERSECTION MAY REQUIRE 2.0m MEDIAN SUBJECT TO CITY REQUEST.
3. LANE MARKINGS TO BE TAPERED IN ACCORDANCE WITH O.T.M. BOOK 11.
4. LOCAL TO ARTERIAL INTERSECTIONS DISCOURAGED & WHERE NECESSARY THEIR DESIGN MUST BE APPROVED BY THE CITY AND REGION (WHERE APPLICABLE).
5. INCREASED CURB RADII CAN BE CONSIDERED WHERE JUSTIFIED BASED ON HIGH TRAFFIC AND/OR BUS VOLUMES EXPECTED.

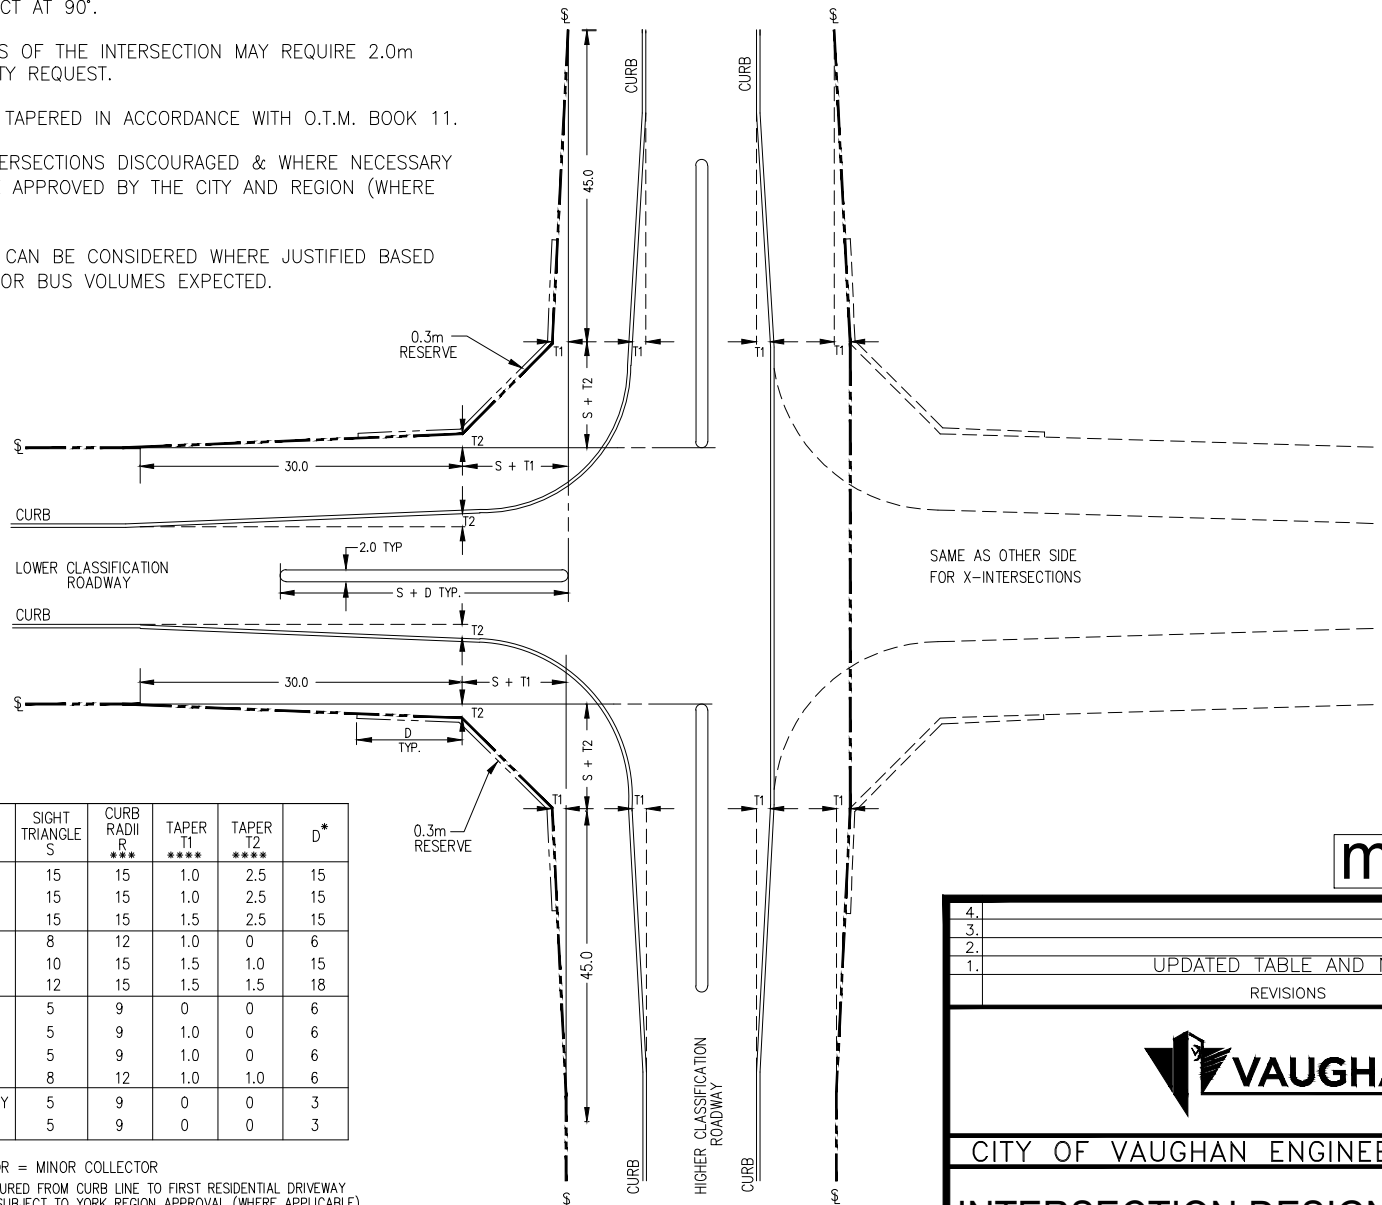


TABLE:

INTERSECTION OF:	SIGHT TRIANGLE S	CURB RADII R ***	TAPER T1 ****	TAPER T2 ****	D*
ARTERIAL AND LOCAL **	15	15	1.0	2.5	15
ARTERIAL AND MINOR **	15	15	1.0	2.5	15
ARTERIAL AND MAJOR**	15	15	1.5	2.5	15
MAJOR AND LOCAL	8	12	1.0	0	6
MAJOR AND MINOR	10	15	1.5	1.0	15
MAJOR AND MAJOR	12	15	1.5	1.5	18
MINOR AND LANEWAY	5	9	0	0	6
MINOR AND LOCAL	5	9	1.0	0	6
MINOR AND BUFFER	5	9	1.0	0	6
MINOR AND MINOR	8	12	1.0	1.0	6
LOCAL AND LOCAL/BUFFER/LANEWAY	5	9	0	0	3
BUFFER AND BUFFER/LANEWAY	5	9	0	0	3

MAJOR = MAJOR COLLECTOR; MINOR = MINOR COLLECTOR

* SUBJECT TO MAXIMUM 25m MEASURED FROM CURB LINE TO FIRST RESIDENTIAL DRIVEWAY (NOT MULTI-UNIT APPARMENTS) SUBJECT TO YORK REGION APPROVAL (WHERE APPLICABLE).

** UNLESS OTHERWISE REQUIRED BY YORK REGION

*** THE CITY WOULD WELCOME SMALLER CURB RADII TO BENEFIT PEDESTRIANS IN URBAN AREAS, INTENSIFICATION AREAS AND AREAS WITH HIGHER DENSITY. THE CITY'S TRANSPORTATION MASTER PLAN MAKES RECOMMENDATIONS FOR OPTIMUM CURB RADII (CITY OF VAUGHAN 2012, 6-21). PROPOSALS TO REDUCE CURB RADII SHALL BE SUPPORTED BY A TRANSPORTATION CONSULTANT.

**** THE PROVISION OF TAPER T1 AND T2 IS SUBJECT TO CITY DISCRETION/REQUIREMENT.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.	UPDATED TABLE AND NOTES	11/24
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

INTERSECTION DESIGN GUIDELINES

NOT TO SCALE

DESIGNED: _____

REVISION: 1


DATE: AUG. 2021

STD. DWG.


R - 110

FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Update Folder\City Standards\Drawings_CAD_2021\R-111 - Street Signs.dwg

LOCATION PLAN

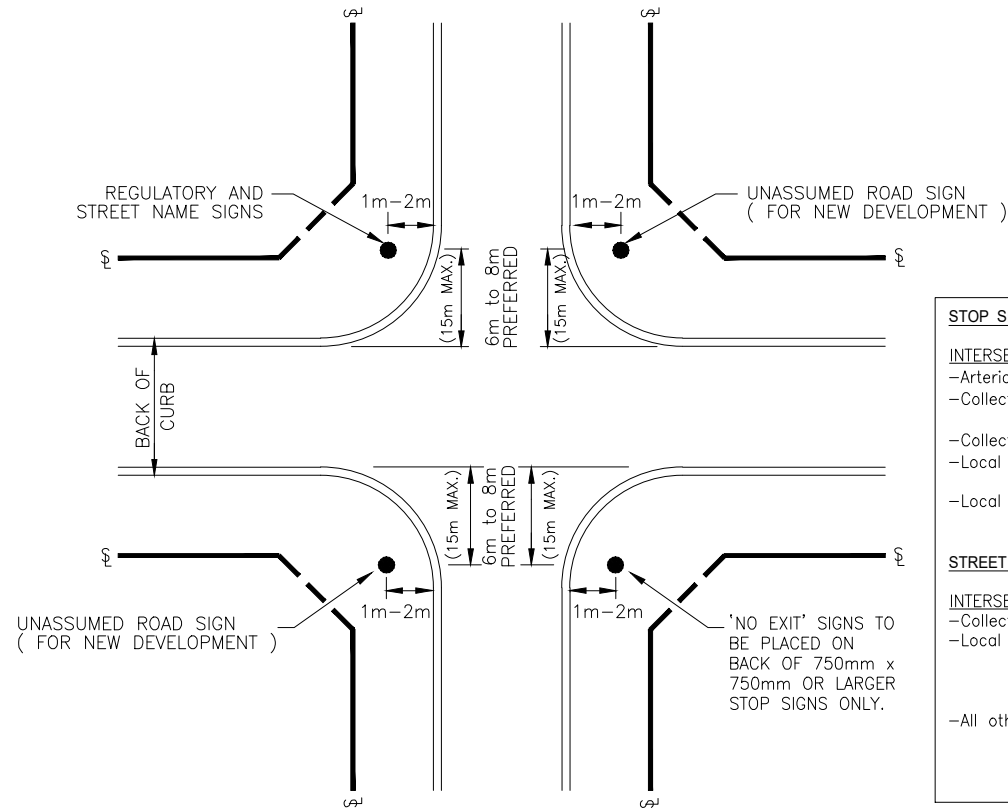

INSTALLATION DETAIL

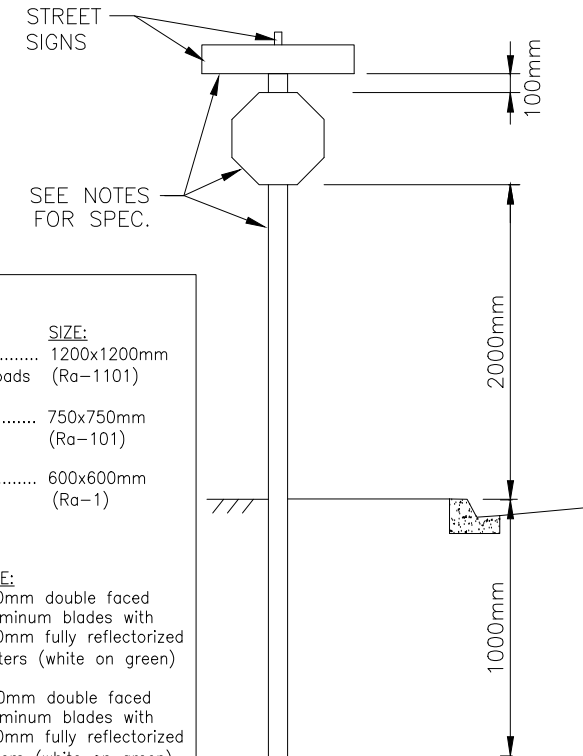

STOP SIGN SIZES

INTERSECTION:	SIZE:
-Arterial to Arterial, Collector (14m),	1200x1200mm
-Collector (14m) to Collector (14m) roads (Ra-1101)	
-Collector (11.5m) to Collector (14m).....	750x750mm
-Local to Collector	(Ra-101)
-Local to Local roads	600x600mm
	(Ra-1)

STREET NAME SIGN SIZES

INTERSECTION:	SIZE:
-Collector to Local	150mm double faced
-Local to Local roads	aluminum blades with
	100mm fully reflectorized
	letters (white on green)
-All other roads	200mm double faced
	aluminum blades with
	150mm fully reflectorized
	letters (white on green)


NOTES

1. REGULATORY SIGN AS PER OHTA REG. 615/95 OR AMENDMENTS THEREOF.
2. ALL REGULATORY SIGNS MANUFACTURES USING HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING STAMPED WITH DATE (MONTH/YEAR) ON SIGN FACE BY MANUFACTURER.
3. SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH MTOD 986.101, 986.105, 987.101, 987.105 AND OPSS 915.
4. REGULATORY AND STREET SIGNS MAY BE PLACED ON LIGHT STANDARDS, PROVIDED THEY ARE CLEARLY VISIBLE AND WITHIN SPECIFIED LOCATIONS.
5. SPECIAL CIRCUMSTANCES MAY WARRANT LARGER STOP SIGNS, OR SECOND STOP SIGN ON SAME APPROACH.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
STREET SIGNS		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	R - 111

FILE: Q:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\CoStandardDrawings_CAD_2021\R-112 - Breakaway Bollard Detail.dwg

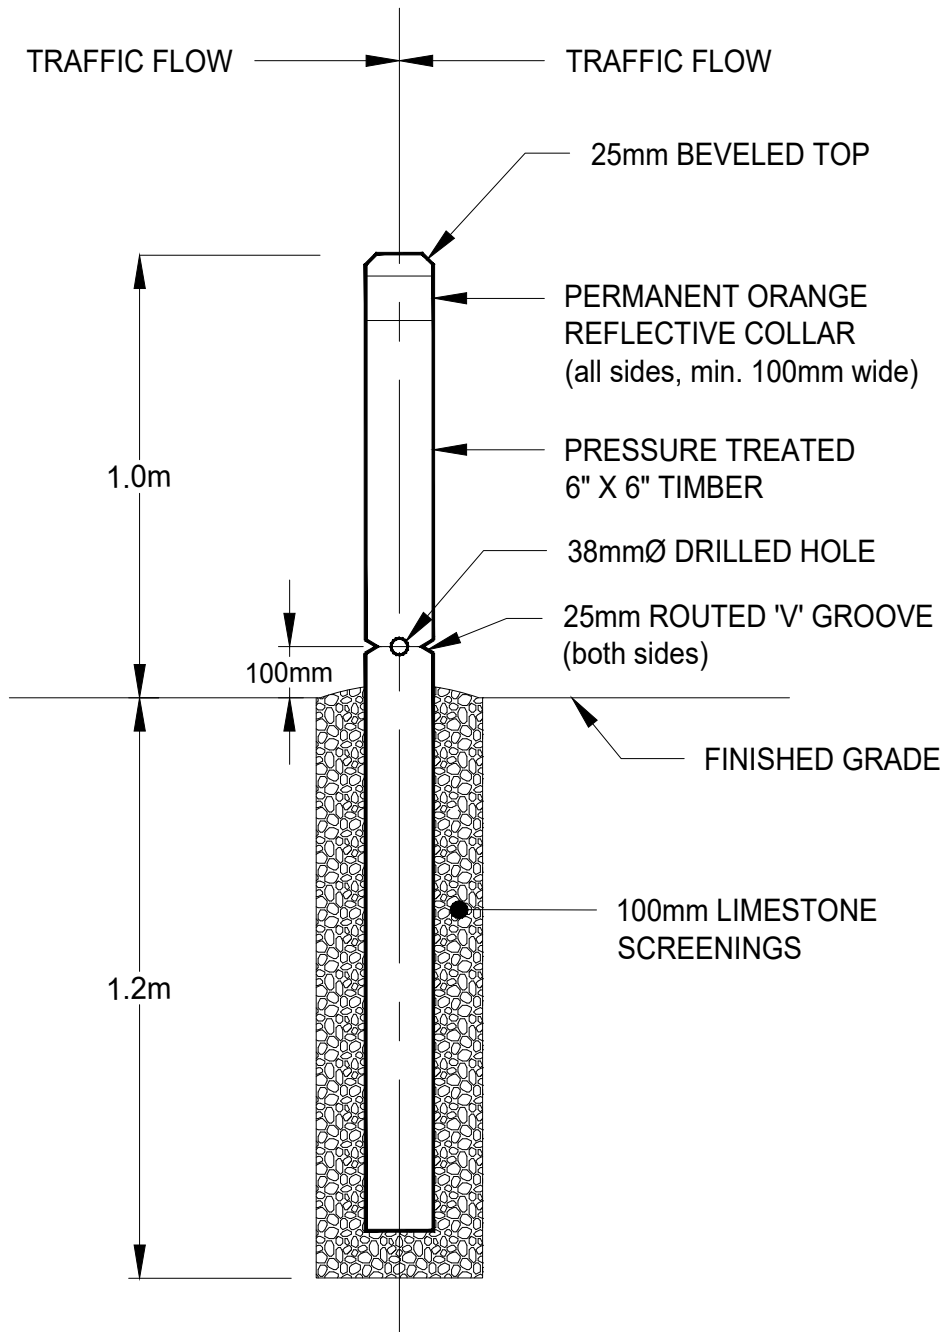


NOTE:

1. BOLLARDS MUST BE PLACED WITH 'V' GROOVES PERPENDICULAR TO TRAFFIC FLOW.
2. BOLLARD POSTS TO BE INSTALLED WITH MIN 2.0m CLEARANCE FROM ANY FIXED STRUCTURE/OBSTACLE

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
BREAKAWAY BOLLARD DETAIL		
NOT TO SCALE	DESIGNED: _____	STD. DWG. R - 112
REVISION: _____	DATE: DEC. 2020	

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

FILE: 0:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Update Folder\City Standards\Drawings_CAD_2021\R-113 - Dead End Barricade.dwg

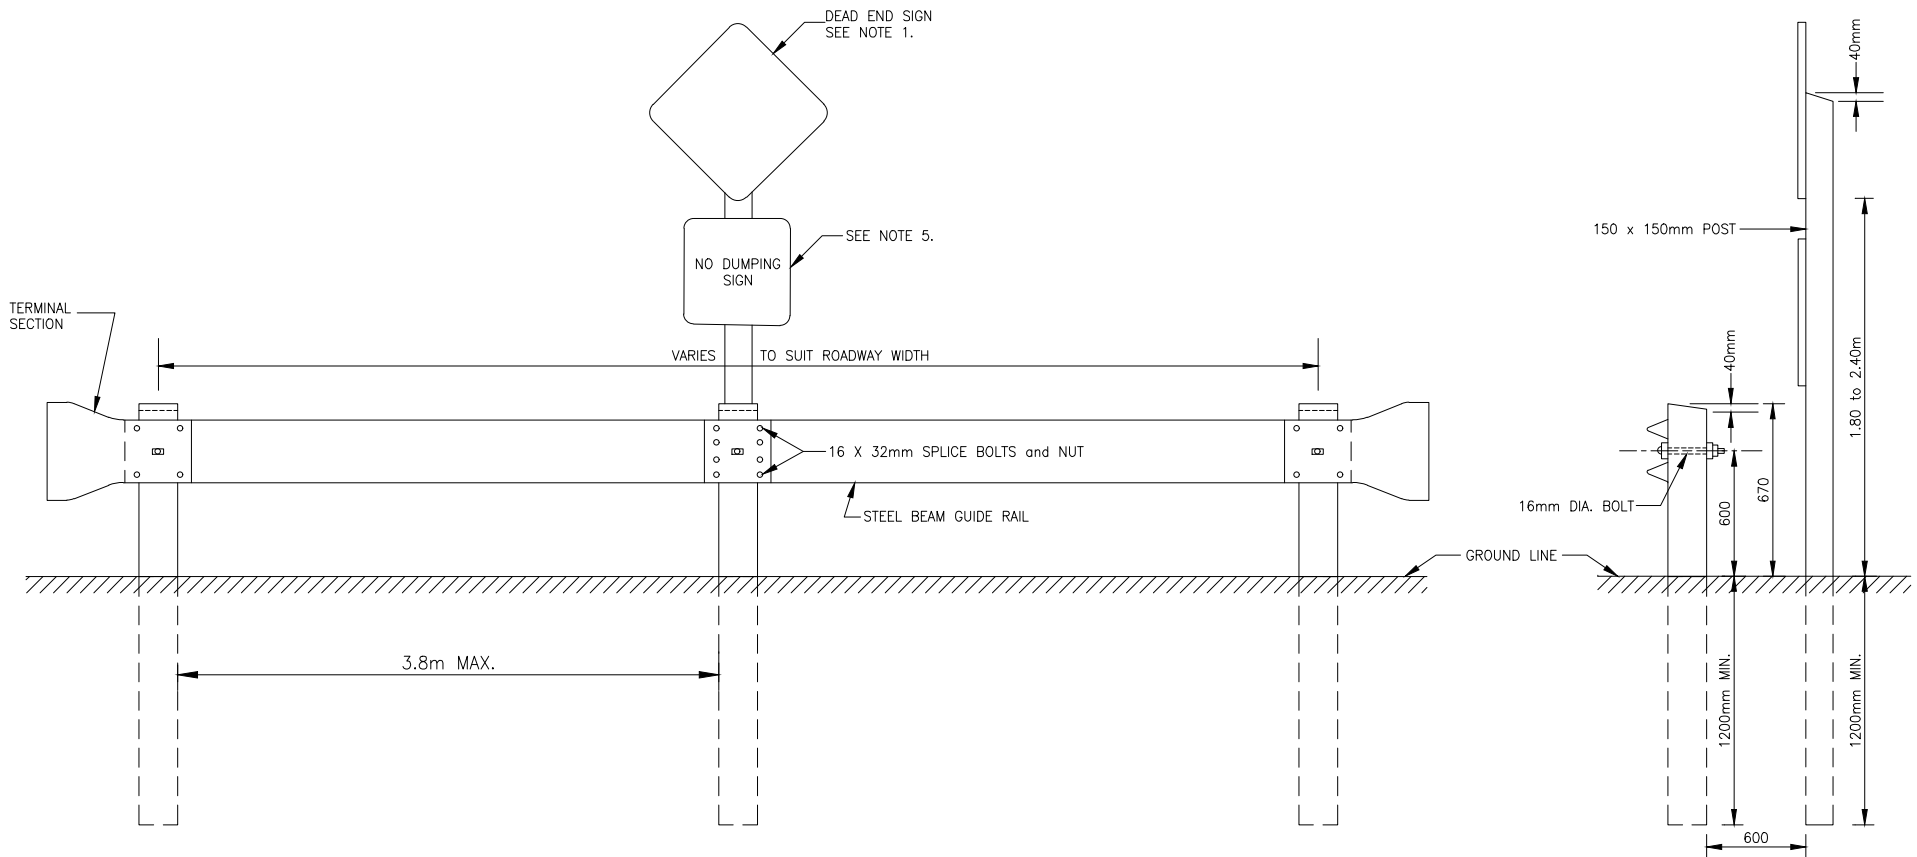

ELEVATION


NOTES

1. DEAD END SIGN AS SPECIFIED IN THE ONTARIO TRAFFIC MANUALS (OTM)
2. ALL METAL TO BE GALVANIZED.
3. DEAD END BARRICADES REQUIRED WHEN A ROAD ENDS WITHOUT A TURNING CIRCLE AND TO EXTEND 2.0m BEYOND CURB LINE.
4. ALL POSTS TO BE GALVANIZED STEEL.
5. NO DUMPING SIGN TO BE IN ACCORDANCE WITH THE CITY STANDARDS (TRANSPORTATION SERVICES, PARKS AND FORESTRY OPERATIONS)

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
DEAD END BARRICADE		
NOT TO SCALE	DESIGNED: _____	STD. DWG. R - 113
REVISION: _____	DATE: DEC. 2020	

FILE: C:\Infrastructure\Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria\2020-21\City Standards Update\Folder\Co\StandardDrawings_CAD_2021\R-114 - Construction Traffic Barricades.dwg

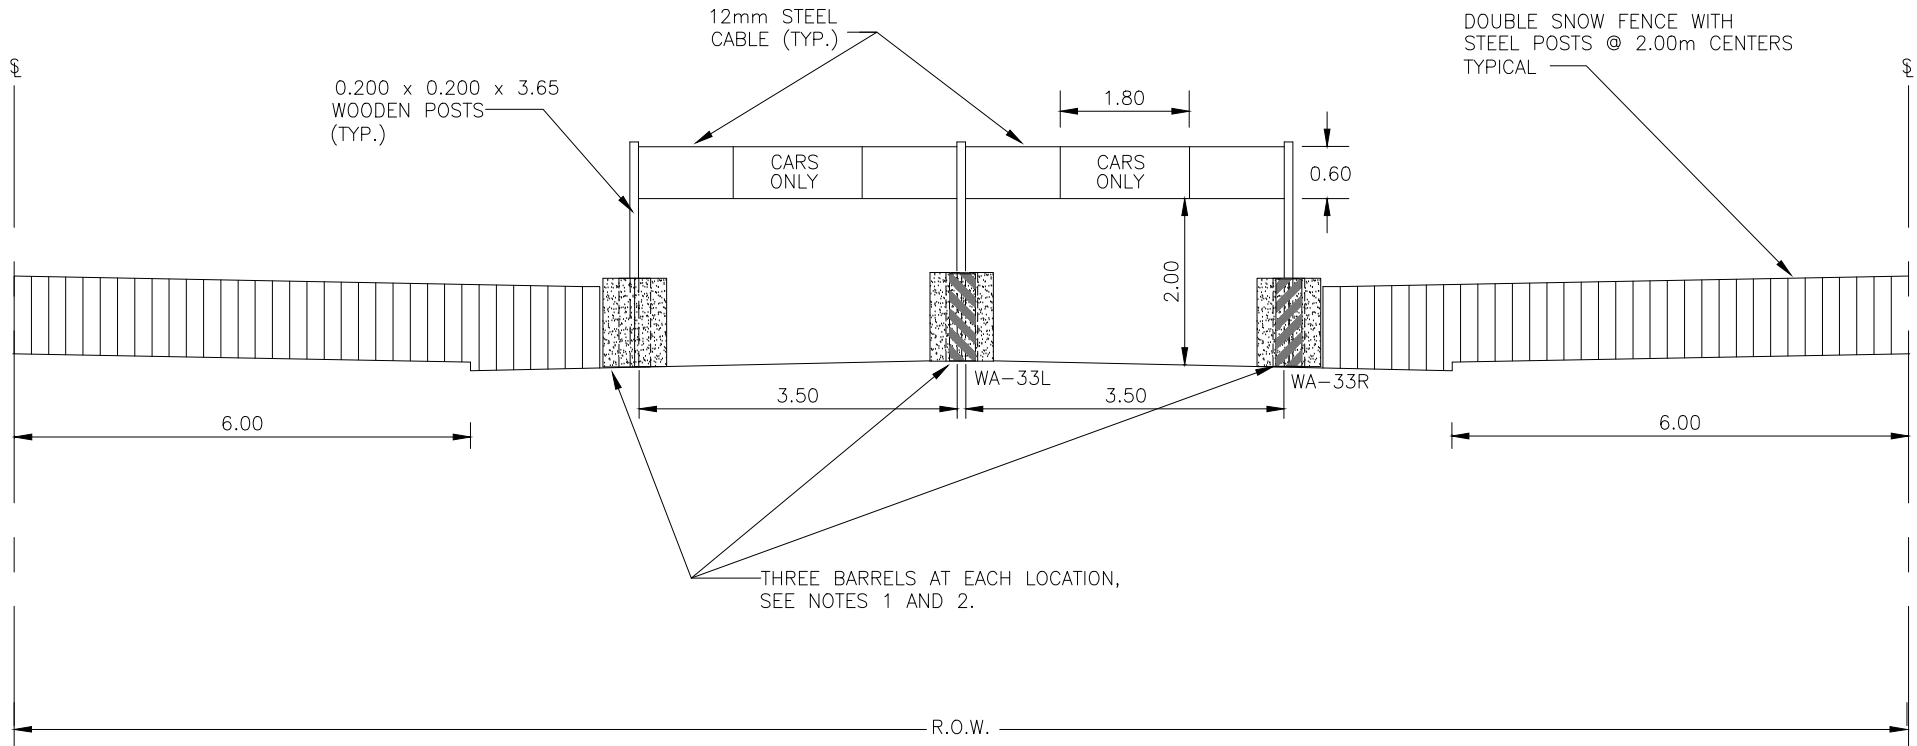

NOTES

1. TWO FRONT BARRELS TO BE FILLED WITH SAND; REAR BARREL TO BE FILLED WITH CONCRETE.
2. CONTRACTOR TO EMBED 200 x 200mm POSTS IN REAR BARREL.
3. MINIMUM LANE WIDTH TO BE 3.00m.
4. MINIMUM CLEARANCE FROM BOTTOM OF OVERHEAD SIGN TO ROAD TO BE 2.00m.
5. CABLE TO BE ATTACHED TO POSTS WITH BOLTS TO PERMIT EMERGENCY VEHICLES TO CUT THE BOLTS AND NOT THE CABLES TO GAIN ACCESS.
6. OVERHEAD SIGNS SHALL HAVE AN ORANGE BACKGROUND WITH A BLACK LEGEND MESSAGE AND SIGN BORDER.
7. ALL SIGNS SHALL BE REFLECTORIZED TO SHOW THE SAME COLOUR AND SHAPE BY DAY AS BY NIGHT.
8. SIGNAGE TO BE THE SAME FOR OPPOSING DIRECTION.
9. DELINEATORS TO BE INSTALLED ON BOTH OPENINGS, BOTH DIRECTIONS.



DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

CONSTRUCTION TRAFFIC BARRICADES

NOT TO SCALE

DESIGNED: _____



REVISION: _____

DATE: DEC. 2020



STD. DWG.

R - 114

SPEED HUMP, RAISED CROSSWALK & RAISED INTERSECTION




INSTALL ON
LOCAL ROADS



INSTALL ON PRIMARY/FEEDER
ROADS OR ABOVE


ROUNDABOUT

600x600mm
WARNING SIGN



INSTALL ON
LOCAL ROADS


750x750mm
WARNING SIGN



INSTALL ON PRIMARY/FEEDER
ROADS OR ABOVE

MEDIAN


750x750mm
WA-23L LANE
REDUCTION SIGN



INSTALL IF MEDIAN RESULTS
IN LANE REDUCTION

CURB EXTENSION & CHICANE

750x750mm
WA-23R LANE
REDUCTION SIGN



INSTALL IF CURB
EXTENSION OR CHICANE
RESULTS IN LANE REDUCTION

INSTALL IN BOTH DIRECTIONS PER THE FOLLOWING (EXCEPT AS NOTED):

1. 100m IN ADVANCE OF EACH MEASURE IF ON LOCAL ROAD, 150m IF ON PRIMARY/FEEDER ROAD OR ABOVE.
2. IN ADVANCE OF SERIES OF MEASURES IF THEY ARE LESS THAN 300m APART.
3. ON PROPERTY LINES WHEREVER POSSIBLE.
4. ON EXISTING LIGHT STANDARD OR UTILITY POLE IF WITHIN 30m OF LOCATION DETERMINED THROUGH PRECEDING STEPS.

NOTES:

1. ALL SIGNS MUST BE VISIBLE TO MOTORISTS FROM A DISTANCE OF 65m ON LOCAL ROADS, AND 85m ON PRIMARY/FEEDER ROADS WHEREVER POSSIBLE. TRIM OR RELOCATE OBSTRUCTING BOULEVARD TREES IF NECESSARY.
2. LETTERING AND SYMBOLS TO BE BLACK ON HIGH INTENSITY REFLECTIVE YELLOW BACKGROUND, EXCEPT WHERE NOTED.
3. MOUNT ON 3.7m U-CHANNEL GALVANIZED STEEL POSTS, OR EXISTING LIGHT STANDARDS OR UTILITY POLES IF APPROPRIATE.
4. MOUNT SO THAT BOTTOM EDGE OF WARNING SIGN IS BETWEEN 2.0 AND 2.5m HIGH AND ROADSIDE EDGE IS AT LEAST 0.3m BEHIND CURB.


TRAFFIC-CALMED NEIGHBOURHOOD

600x450mm
WHITE ON GREEN SIGN



600x225mm
WHITE ON GREEN TAB


INSTALL ON ALL STREETS
ENTERING A TRAFFIC CALMED
NEIGHBOURHOOD
(MIN. 20m FROM ARTERIAL ROAD
WHEREVER POSSIBLE)




mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED




4.		
3.		
2.		
1.		
REVISIONS		DATE
CITY OF VAUGHAN ENGINEERING STANDARD		
TRAFFIC CALMING ADVANCE WARNING SIGNS		
NOT TO SCALE	DESIGNED: _____ P.W.	STD. DWG.
REVISION: _____	DATE: _____ MARCH 2004	J - 1

Distance (m)	Height (mm)
0.0	0
0.2	0.2
0.4	0.8
0.6	16.8
0.8	27.8
1.0	40
1.2	52.2
1.4	63.2
1.6	72
1.8	77.8
2.0	80

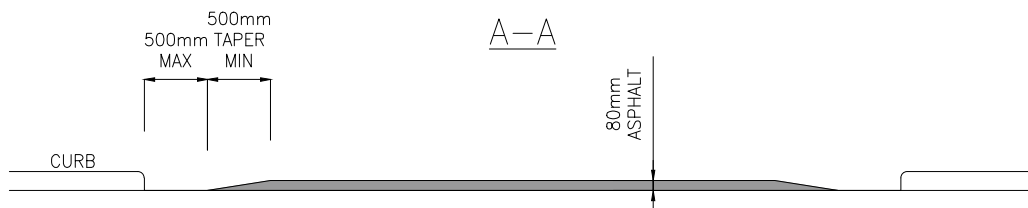


1. MINIMUM 60m SPACING BETWEEN SPEED HUMPS.
2. FOR EXISTING ROADS ASPHALT SHOULD BE GRINDED TO PROVIDE A 150mm WIDE STEP JOINT.
3. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
4. WHEN POSSIBLE, BIKE LANES TO BE DELINEATED USING PHYSICAL SEPARATOR.
5. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.

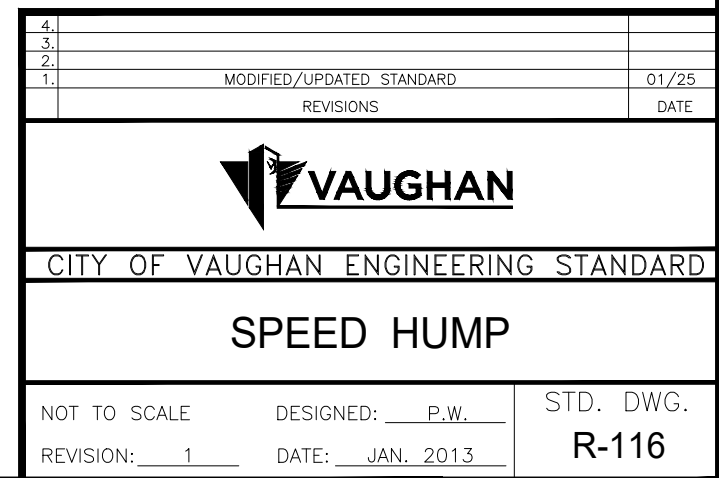

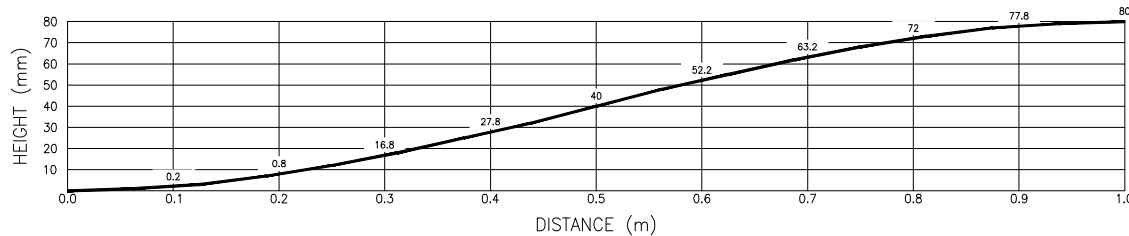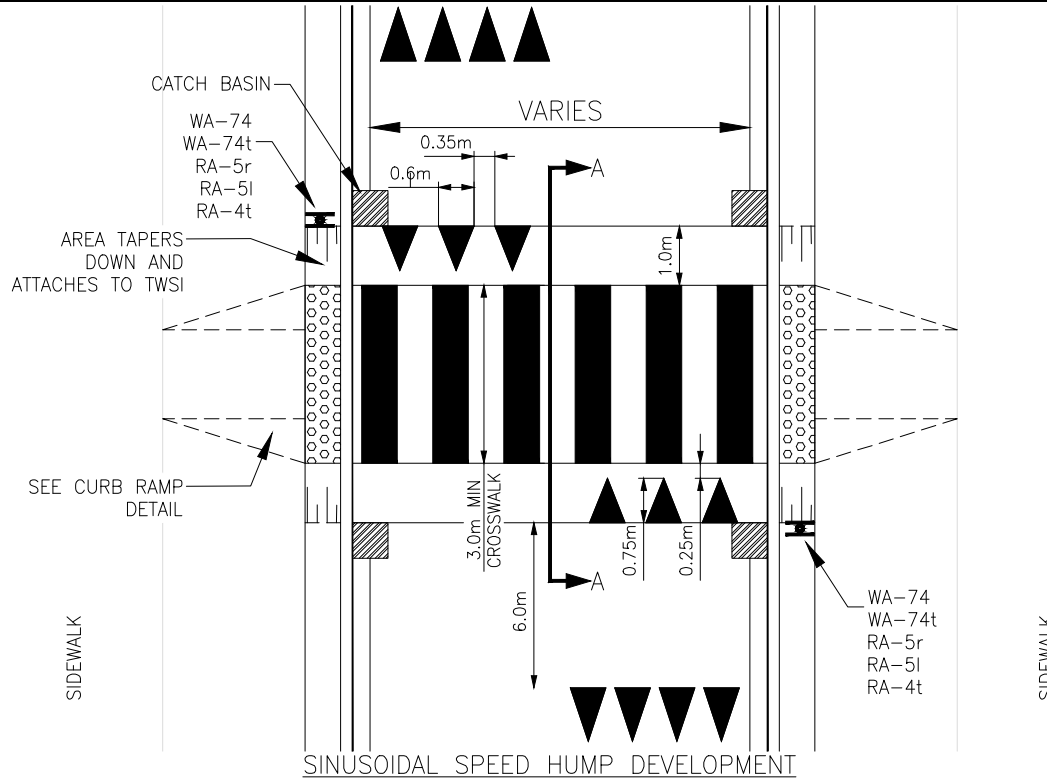

CURB RAMP DETAIL

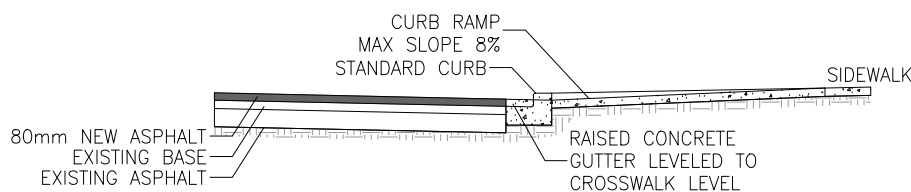

NOTES:

1. RAISED CROSSWALKS TO BE IMPLEMENTED AT MIDBLOCK CONFIGURATION. RAISED CROSSWALKS AT INTERSECTIONS TO BE IMPLEMENTED AS PART OF RAISED INTERSECTION.
2. PAVEMENT MARKINGS AND SIGNAGE SHALL COMPLY WITH OTM BOOK 11 AND OTM BOOK 15.
3. TACTILE FEATURES PER AODA STANDARDS.
4. ADD THIRD PAVEMENT MARKING TRIANGLE ON EACH SIDE OF RAISED CROSSWALK IF ON COLLECTOR ROAD.
5. CATCH BASINS TO BE LOCATED AT BOTTOM OF RAMP, AS REQUIRED.
6. CHEVRON ARROWS DIMENSION: 0.75m HIGH BY 0.6m WIDE.
7. MIN 0.25m SPACE BETWEEN TOP OF RAMP AND CROSSWALK.
8. DESIGN SHALL HAVE REGARD FOR MANHOLE LOCATIONS AND OVERLAND FLOW ROUTES.
9. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
10. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.



4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	01/25
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD

RAISED MIDBLOCK PEDESTRIAN CROSSOVER (PXO)

NOT TO SCALE DESIGNED: P.W.
REVISION: 1 DATE: JAN. 2016

STD. DWG.
R-117

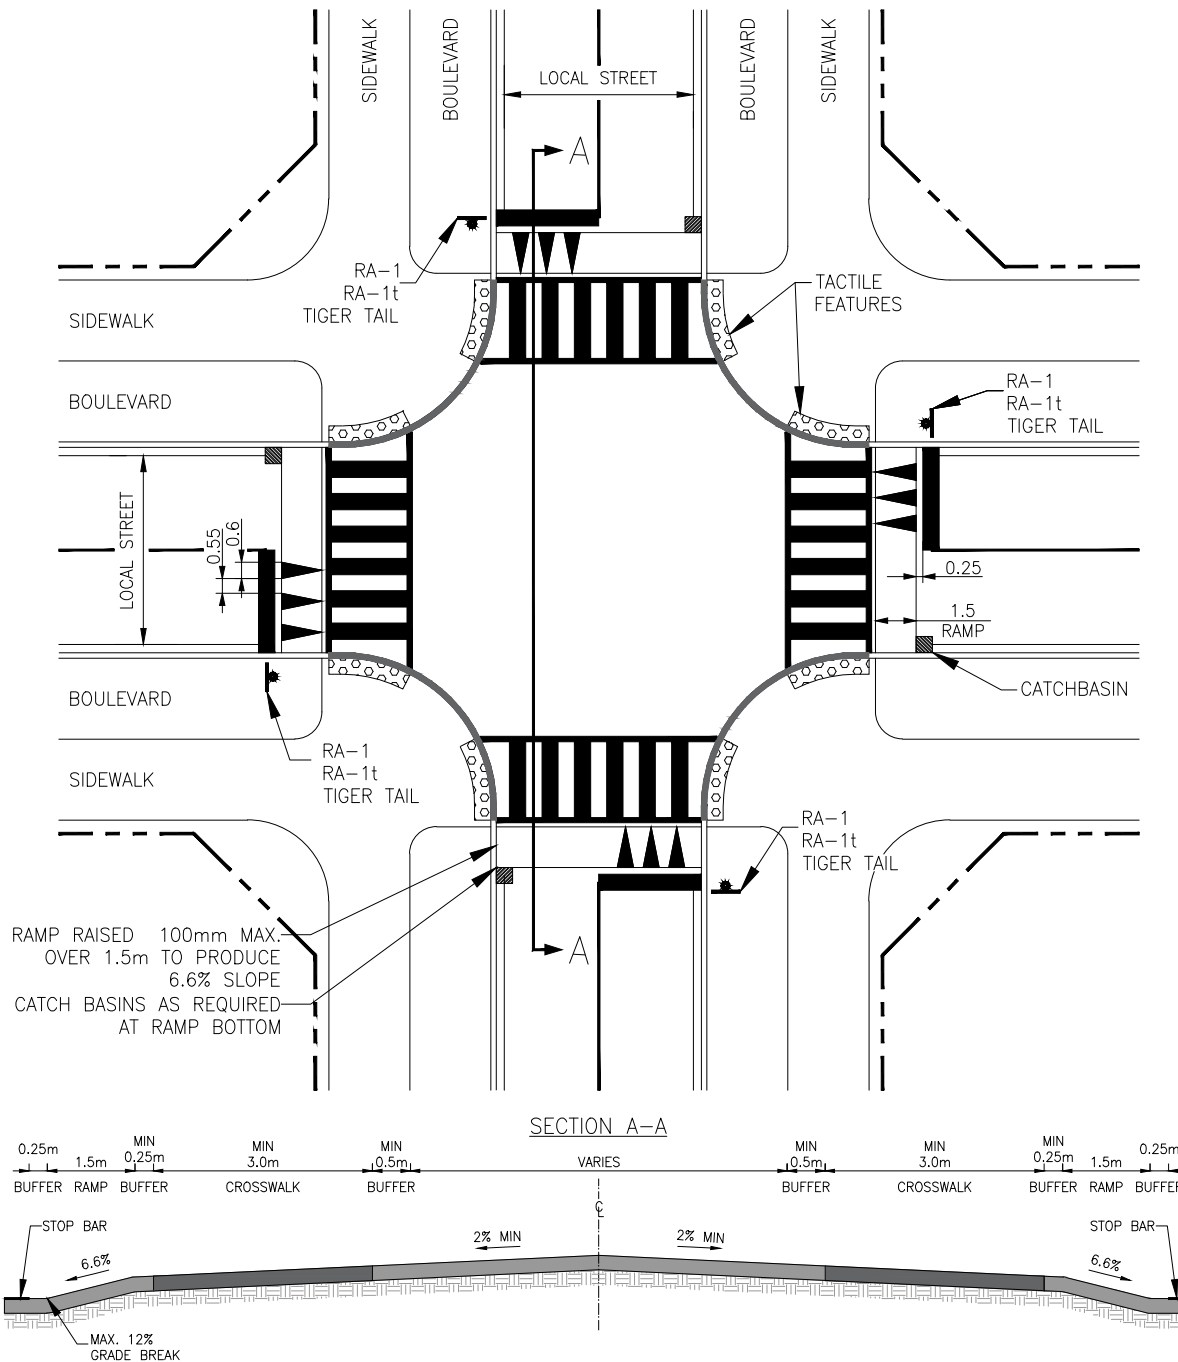

SECTION A-A

NOTES:

1. PAVEMENT MARKINGS SHALL COMPLY WITH OTM BOOK 11 AND OTM BOOK 15.
2. TACTILE FEATURES PER AODA STANDARDS.
3. INCLUDE WA-74 AND WA-74t SIGNS AT LOCATIONS WHERE AN ALL-WAY STOP IS NOT WARRANTED.
4. MAINTAIN ROAD GRADES THROUGH INTERSECTION.
5. CATCH BASINS TO BE LOCATED AT BOTTOM OF RAMPS.
6. CHEVRON ARROWS DIMENSION: 1.5m HIGH BY 0.6m WIDE.
7. MIN 0.25m SPACE BETWEEN TOP OF RAMP AND CROSSWALK.
8. DESIGN SHALL HAVE REGARD FOR MANHOLE LOCATIONS AND OVERLAND FLOW ROUTES.
9. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
10. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.



TIGER TAIL RA-1t



RA-1

4.		
3.		
2.	MODIFIED/UPDATED STANDARD	01/25
1.	REVISED NOTES/UPDATED STANDARD	11/24
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

RAISED INTERSECTION

NOT TO SCALE


DESIGNED: P.W.

REVISION: 2

DATE: JAN. 2016


STD. DWG.

R-118

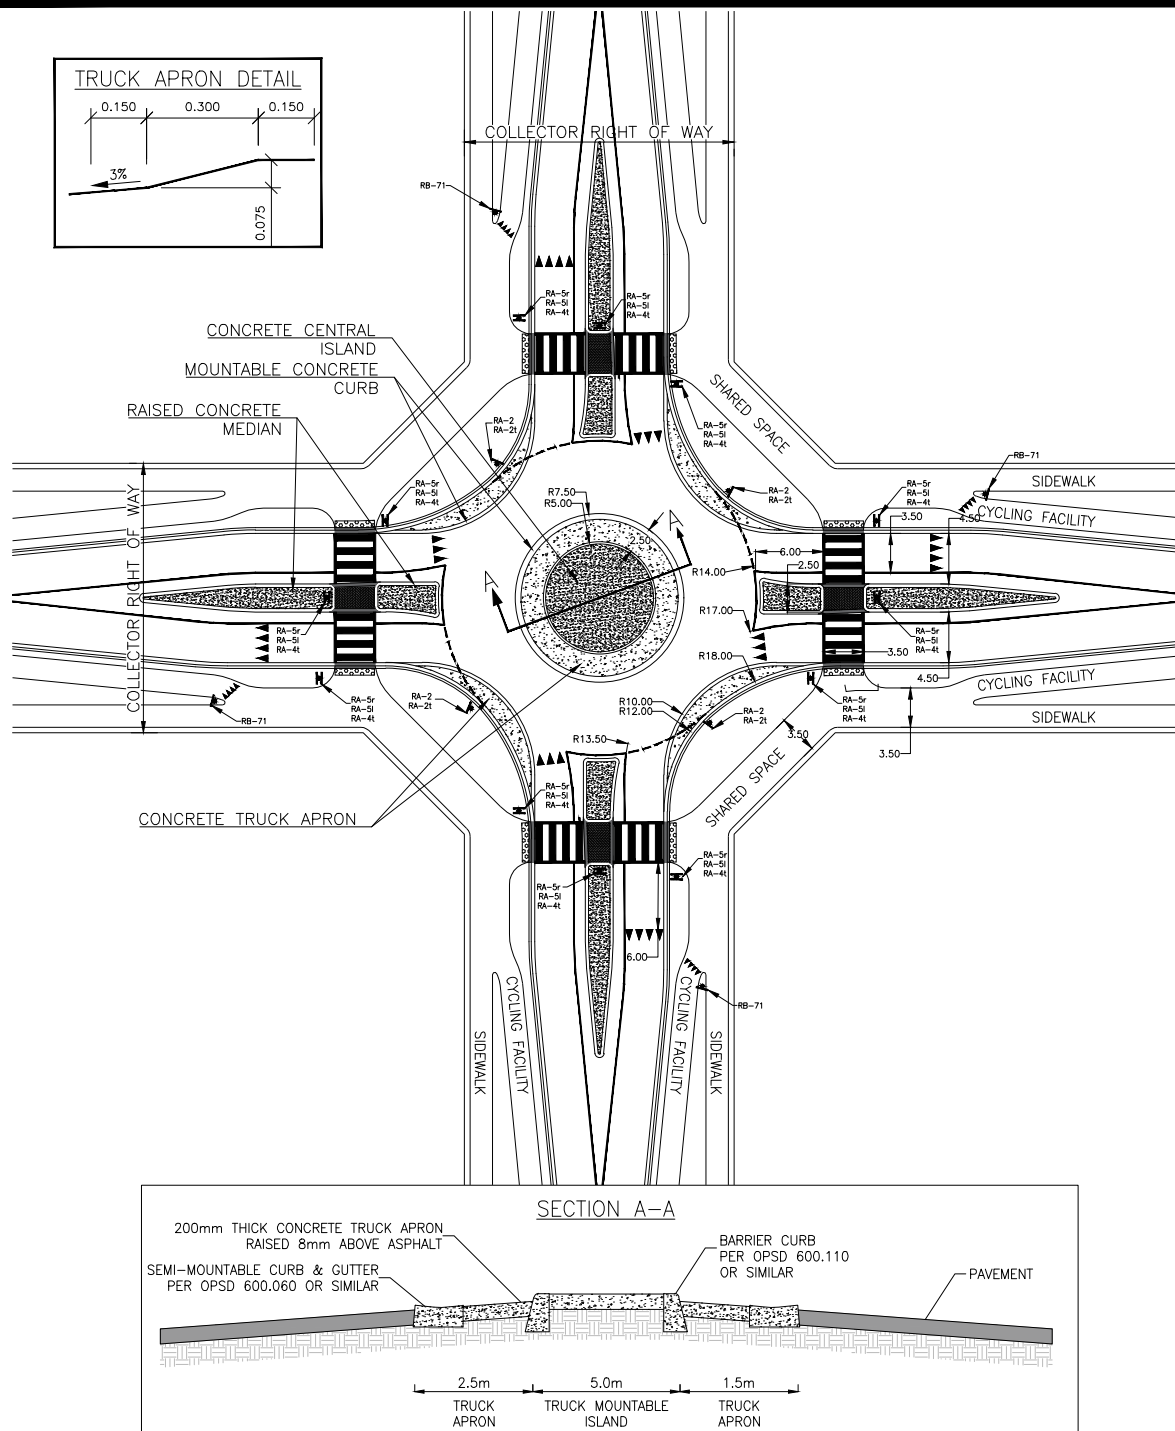


NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. CYCLING FACILITIES MERGE ONTO SHARED SPACE AT THE INTERSECTION. IF SPACE PERMITS, SEPARATING PEDESTRIANS AND CYCLISTS PREFERRED.
4. ALL APPROACHES TO BE UNDER YIELD CONTROL.
5. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION.
6. THE ENTIRE CIRCULATORY ROADWAY MUST BE SLOPED AT A MINIMUM OF 0.5% TO ENSURE DRAINAGE IS NOT TRAPPED AT SPLITTER ISLANDS
7. WC-27r SIGNS (PEDESTRIAN AND BICYCLE CROSSING AHEAD) TO BE PLACED 20-100m FROM THE CROSSING

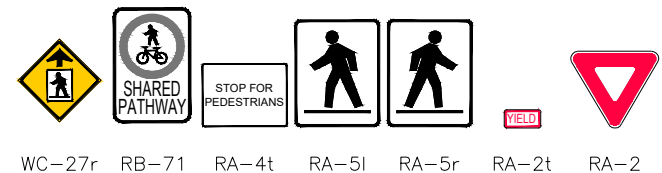

4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	01/25
	REVISIONS	DATE
CITY OF VAUGHAN ENGINEERING STANDARD		
COLLECTOR/COLLECTOR ROUNDABOUT LAYOUT		
NOT TO SCALE	DESIGNED: P.W.	STD. DWG.
REVISION: 1	DATE: JAN. 2016	R-119a

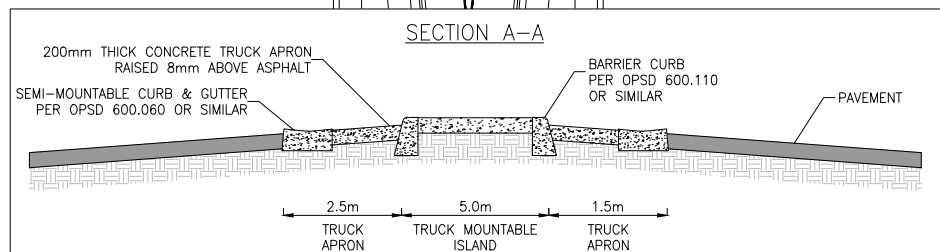

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. CYCLING FACILITIES MERGE ONTO SHARED SPACE AT THE INTERSECTION. IF SPACE PERMITS, SEPARATING PEDESTRIANS AND CYCLISTS PREFERRED.
4. ALL APPROACHES TO BE UNDER YIELD CONTROL.
5. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION.
6. THE ENTIRE CIRCULATORY ROADWAY MUST BE SLOPED AT A MINIMUM OF 0.5% TO ENSURE DRAINAGE IS NOT TRAPPED AT SPLITTER ISLANDS.

4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	01/25
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD

COLLECTOR/COLLECTOR
ROUNDAABOUT LAYOUT
(W. TURNING MOVEMENT 1)

STD. DWG.

R-119b

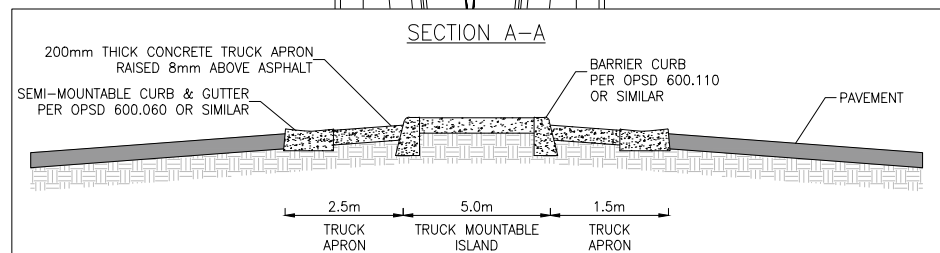

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED WITH SWEEP PATH ANALYSIS FOR DESIGN AND CONTROL VEHICLES.
3. CYCLING FACILITIES MERGE ONTO SHARED SPACE AT THE ROUNDABOUT. IF SPACE PERMITS, SEPARATING PEDESTRIANS AND CYCLISTS SHOULD BE CONSIDERED.
4. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION.
5. THE ENTIRE CIRCULATORY ROADWAY MUST BE SLOPED AT A MINIMUM OF 0.5% TO ENSURE DRAINAGE IS NOT TRAPPED AT SPLITTER ISLANDS.


4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	01/25
	REVISIONS	DATE



COLLECTOR/COLLECTOR
 ROUNDABOUT LAYOUT
 (W. TURNING MOVEMENT 2)

NOT TO SCALE DESIGNED: P.W.
REVISION: 1 DATE: JAN. 2016

STD. DWG.
R-119c

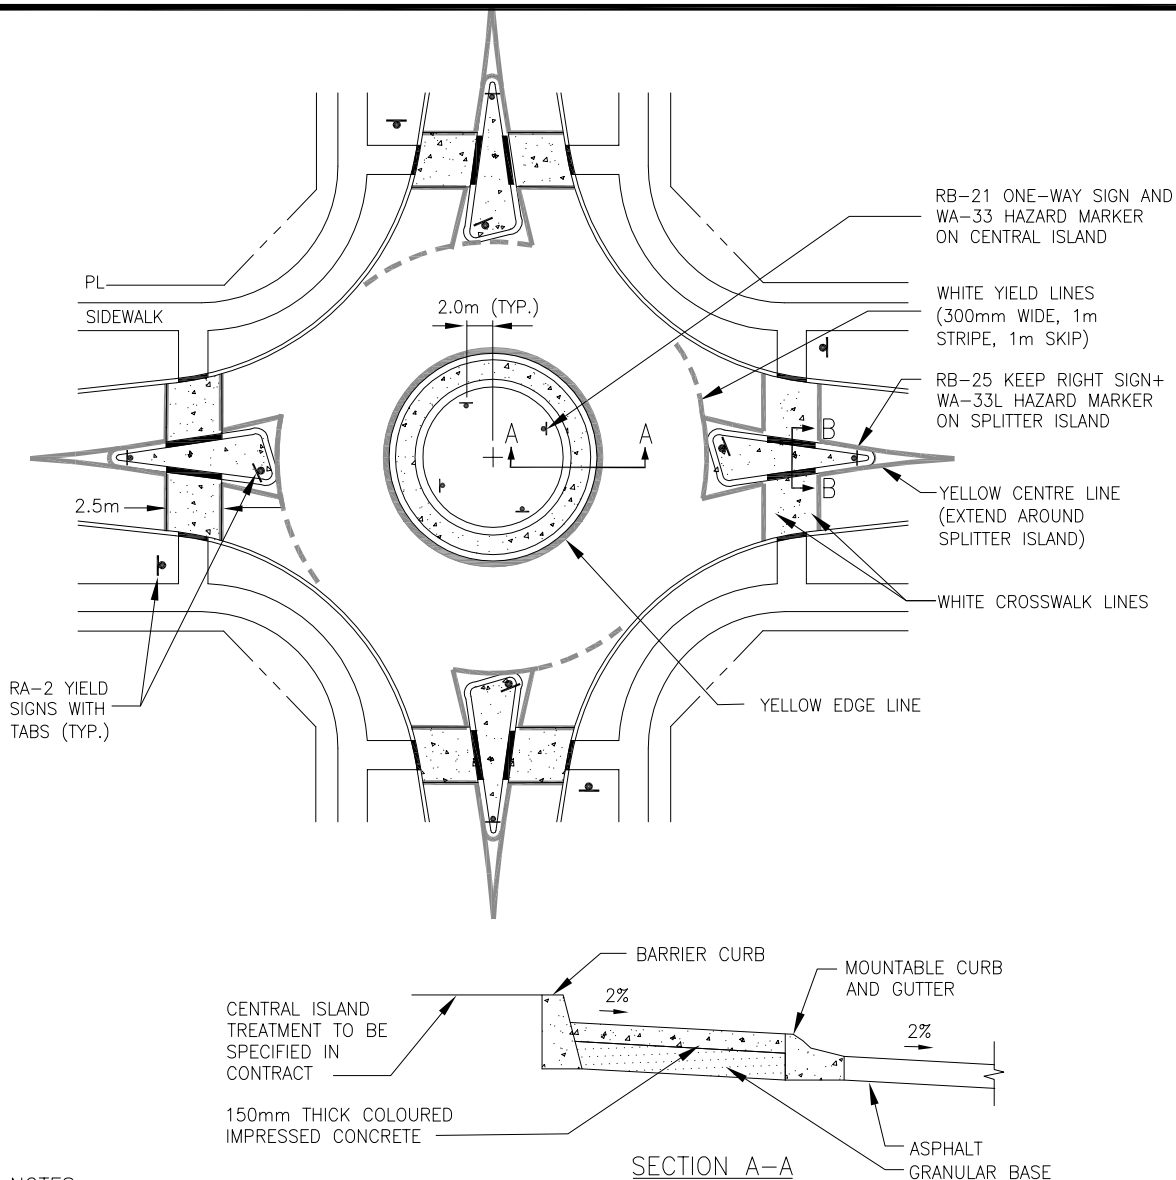


NOTES:

1. ALL APPROACHES TO BE UNDER YIELD CONTROL.
2. ALL SIGNS TO BE HIGH INTENSITY REFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
3. COLOUR AND PATTERN OF IMPRESSED CONCRETE TO BE CONFIRMED WITH CITY ENGINEERING DEPARTMENT AND SPECIFIED IN CONTRACT.
4. INSTALL ADVANCE WARNING SIGNS IN ACCORDANCE WITH STD. DWG. J-1.


mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED

APPROACH SIGNAGE




RA-2 YIELD SIGN AND
600x450mm TAB
(BLACK LETTERS ON WHITE)
INSTALL ON
ALL APPROACHES

CENTRAL ISLAND SIGNAGE



RB-21 ONE-WAY SIGN
AND WA-33 HAZARD MARKER
INSTALL FOR EACH DIRECTION

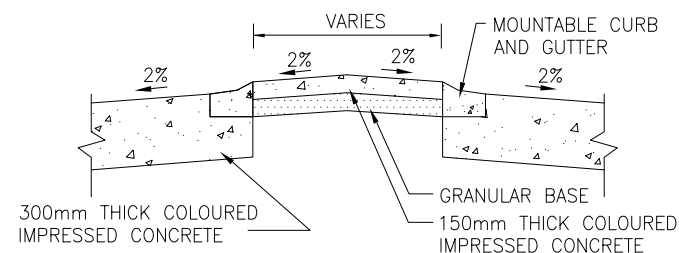

SECTION B-B

4.		
3.		
2.		
1.		
REVISIONS		DATE

Vaughan
The City Above Toronto



ENGINEERING
DEPARTMENT

CITY OF VAUGHAN ENGINEERING STANDARD


SINGLE-LANE ROUNDABOUT

NOT TO SCALE
DESIGNED: _____ P.W.
REVISION: _____ DATE: MARCH 2004

STD. DWG.
J - 6

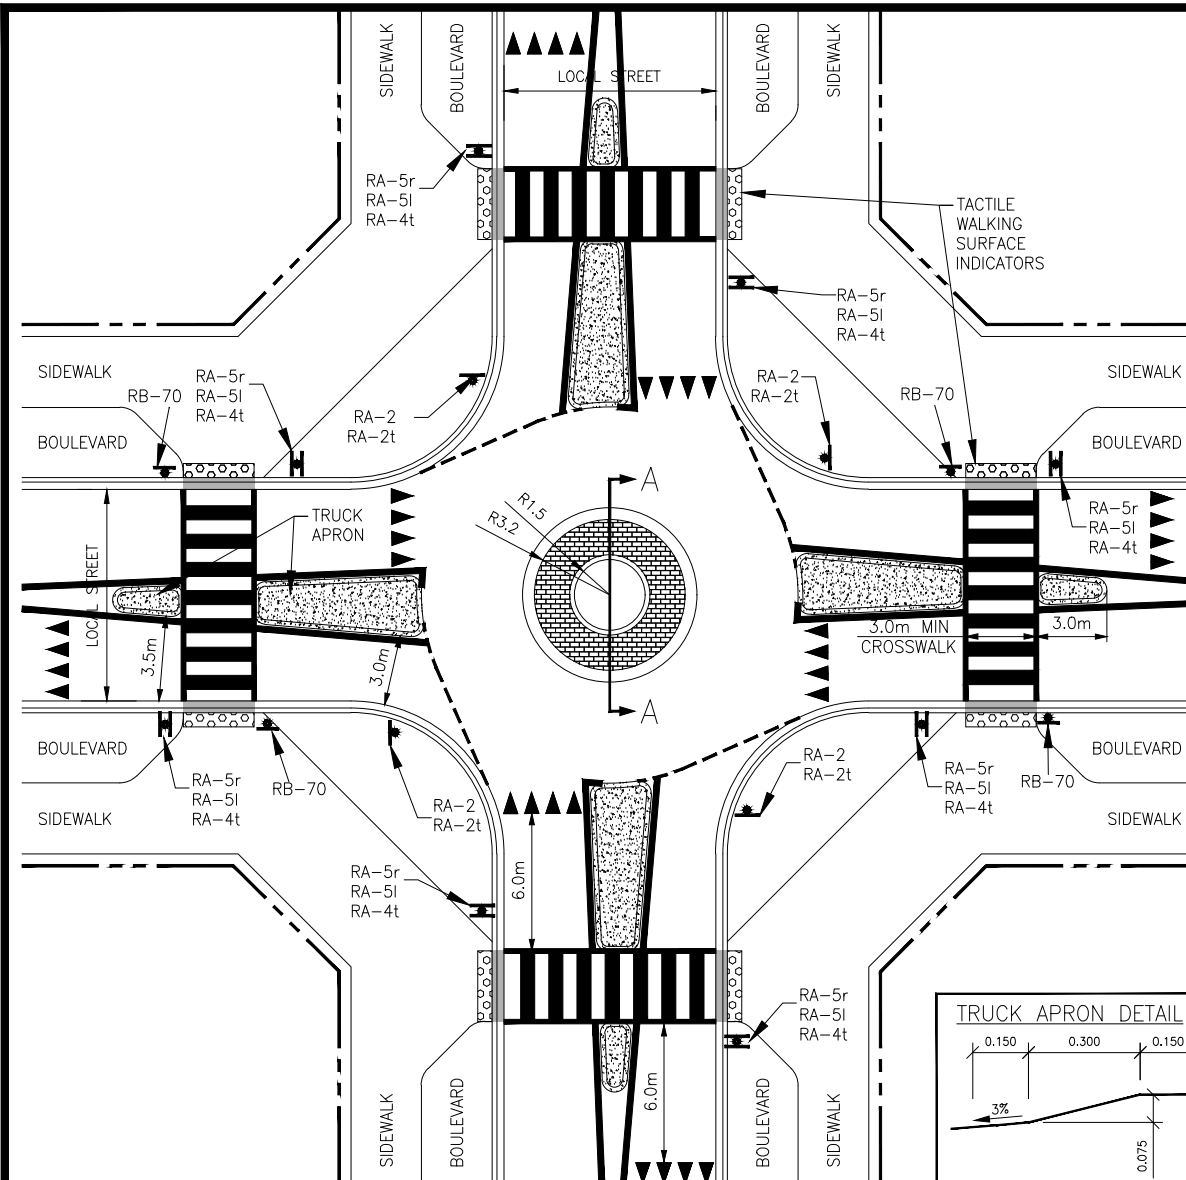

SECTION A-A

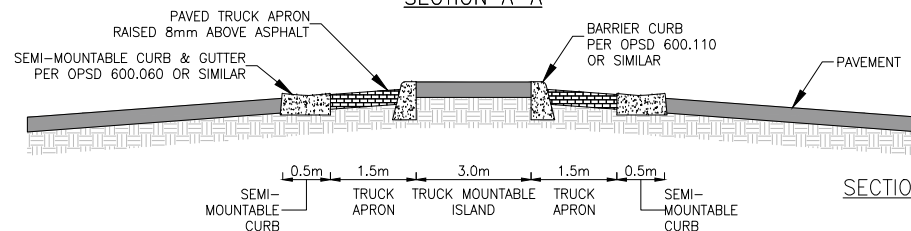

SECTION A-A

NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. COLOUR AND PATTERN OF IMPRESSED ASPHALT TO BE CONFIRMED WITH PUBLIC WORKS DEPARTMENT AND SPECIFIED IN CONTRACT.
7. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT OTM STANDARDS AND SPECIFICATIONS.
8. IF IMPLEMENTED, LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION.
9. WC-15 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER OTM BOOK 18. WA-39 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER MUTCD.
10. PARKING AND STOPPING SHOULD BE PROHIBITED 6.0M FROM THE EDGE OF THE SPLITTER ISLAND.
11. IF INTERSECTION HAS WIDER LANE WIDTH OR LARGER CORNER RADII, USE FLEX POSTS/PAVEMENT MARKINGS TO TIGHTEN UP INTERSECTION TO ENSURE DEFLECTION.
7. WC-27r SIGNS (PEDESTRIAN CROSSING AHEAD) TO BE PLACED 20-50m FROM THE CROSSING
8. IN PRESENCE OF BOULEVARD CYCLING FACILITIES, INCLUDE RB-70 SIGNS OR ACCOMMODATE CROSSRIDE MARKINGS IF SPACE ALLOWS.



RB-70



WC-27r



RA-4t



RA-5l



RA-5r



RA-2t



RA-2

4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	02/25
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD


MINI-ROUNDABOUT

NOT TO SCALE DESIGNED: _____ P.W.
 REVISION: 1 DATE: JAN. 2013


STD. DWG.
R-121a

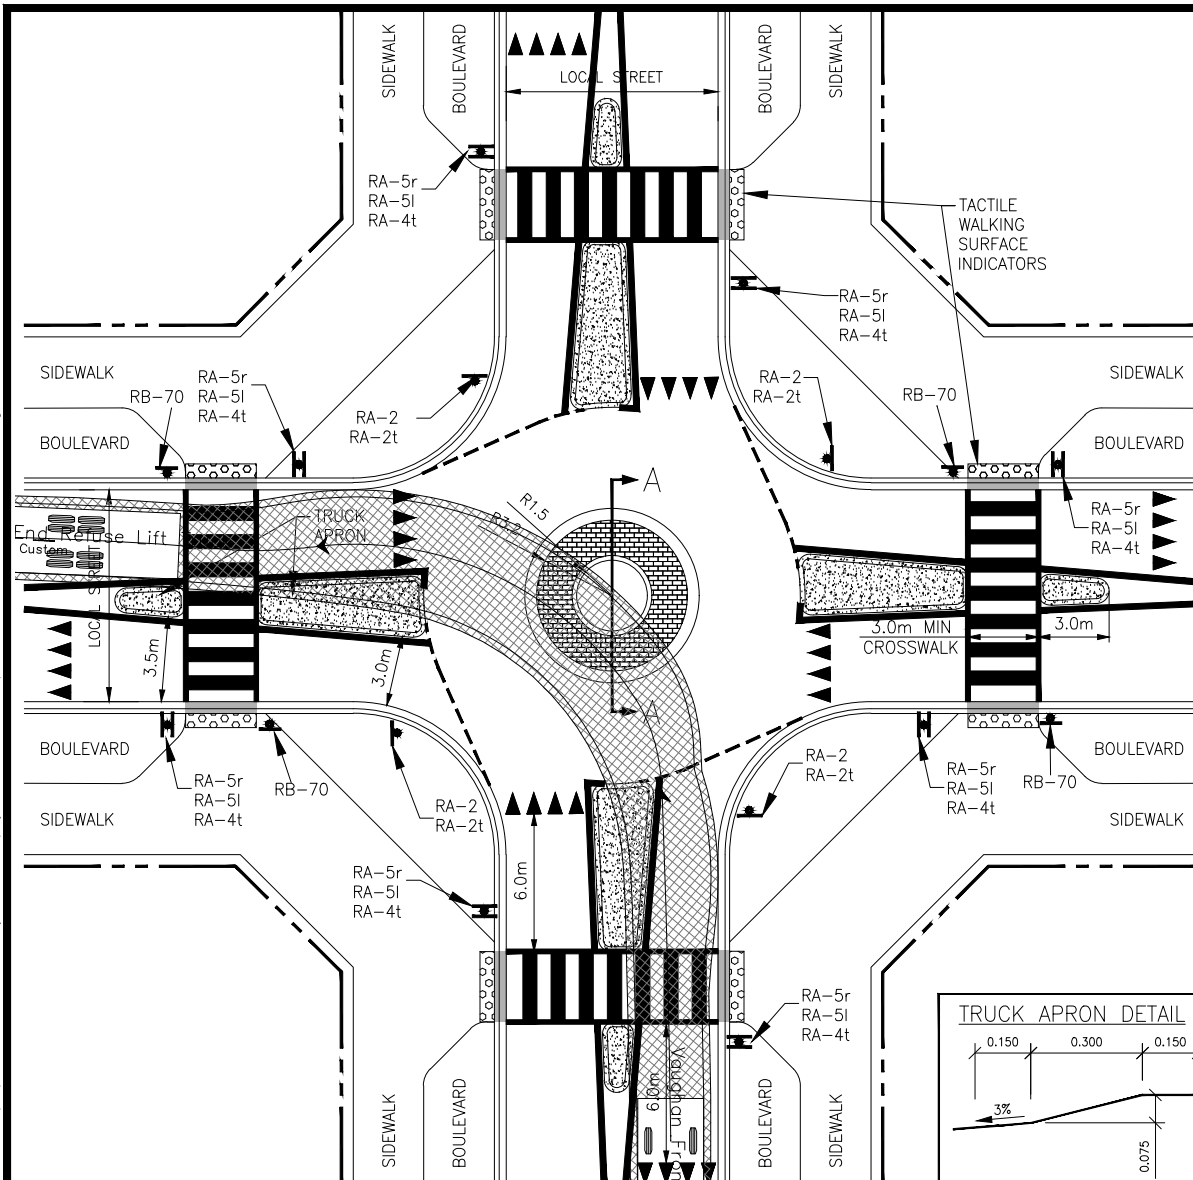

SECTION A-A

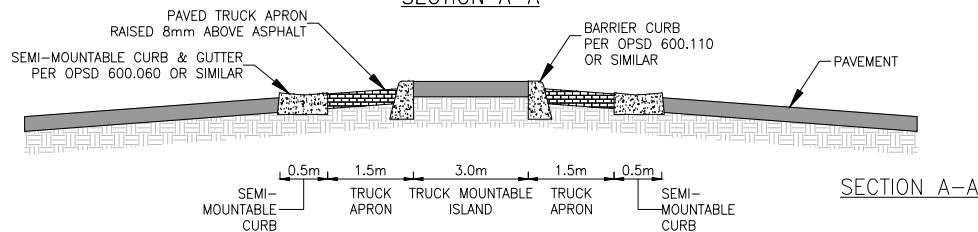


TRUCK APRON DETAIL



SECTION A-A

NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. COLOUR AND PATTERN OF IMPRESSED ASPHALT TO BE CONFIRMED WITH PUBLIC WORKS DEPARTMENT AND SPECIFIED IN CONTRACT.
7. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT OTM STANDARDS AND SPECIFICATIONS.
8. IF IMPLEMENTED, LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION
9. WC-15 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER OTM BOOK 18.
10. PARKING AND STOPPING SHOULD BE PROHIBITED 6.0M FROM THE EDGE OF THE SPLITTER ISLAND.



4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	02/25
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

MINI-ROUNDAABOUT (W. TURNING MOVEMENT 1)

NOT TO SCALE




DESIGNED: P.W.

REVISION: 1

DATE: JAN. 2013


STD. DWG.

R-121b

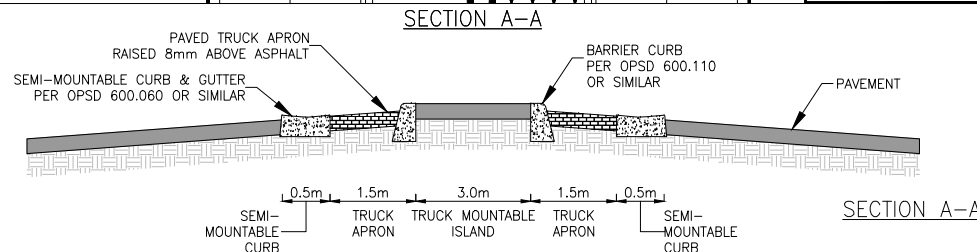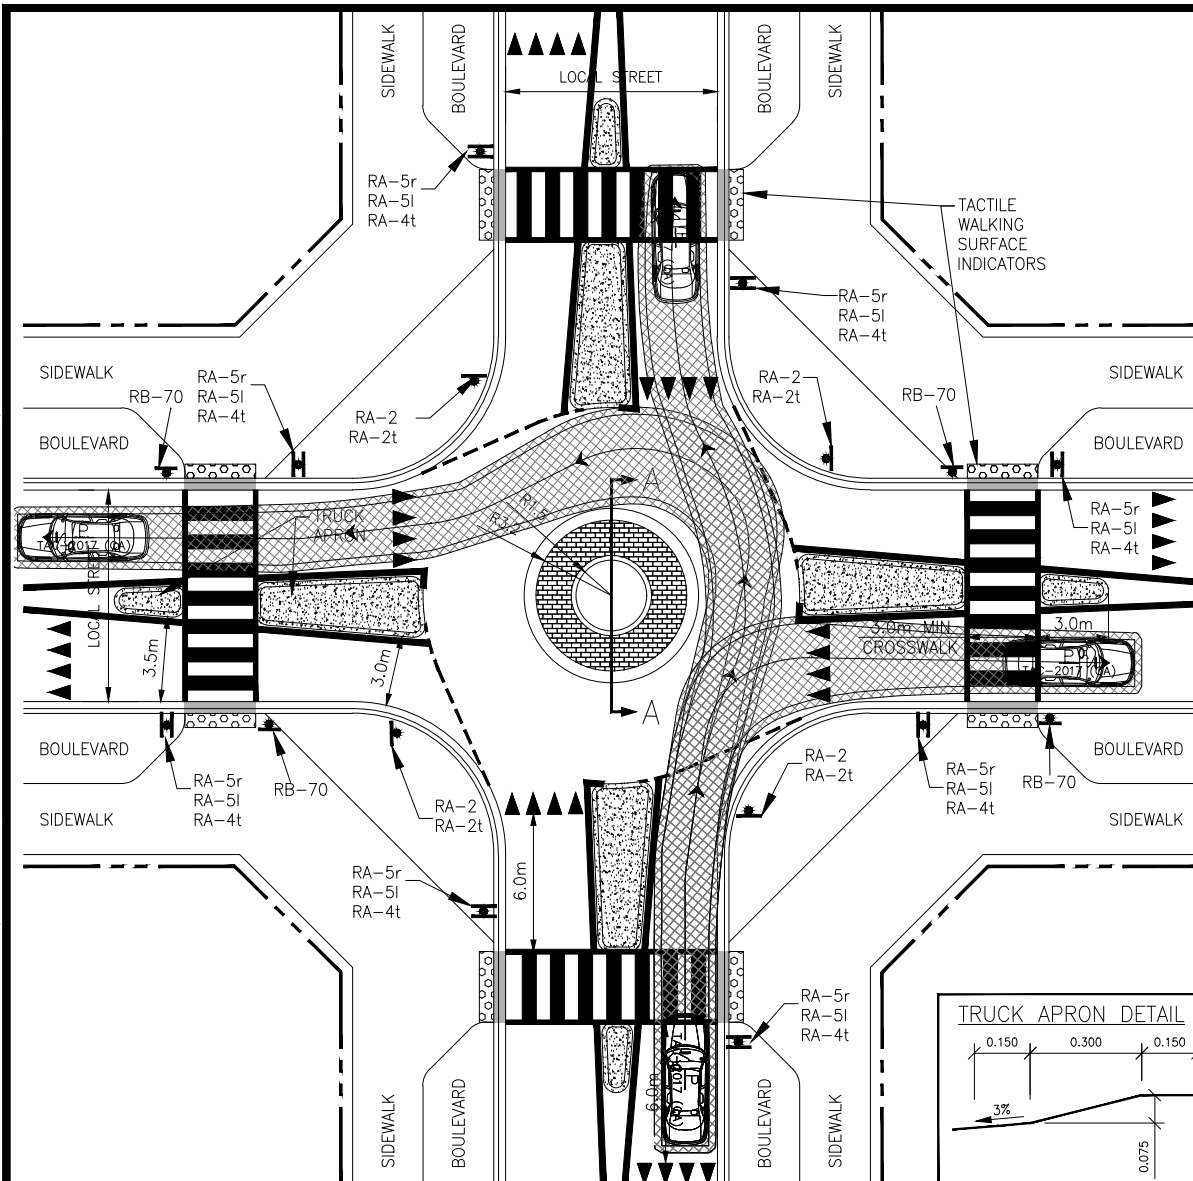

NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. COLOUR AND PATTERN OF IMPRESSED ASPHALT TO BE CONFIRMED WITH PUBLIC WORKS DEPARTMENT AND SPECIFIED IN CONTRACT.
7. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT OTM STANDARDS AND SPECIFICATIONS.
8. IF IMPLEMENTED, LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION
9. WC-15 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER OTM BOOK 18.
10. PARKING AND STOPPING SHOULD BE PROHIBITED 6.0M FROM THE EDGE OF THE SPLITTER ISLAND.



4.		
3.		
2.		
1.	MODIFIED/UPDATED STANDARD	02/25
REVISIONS		




CITY OF VAUGHAN ENGINEERING STANDARD

MINI-ROUNDABOUT (W. TURNING MOVEMENT 2)

NOT TO SCALE DESIGNED: P.W.
REVISION: 1 DATE: JAN. 2013

STD. DWG.
R-121c

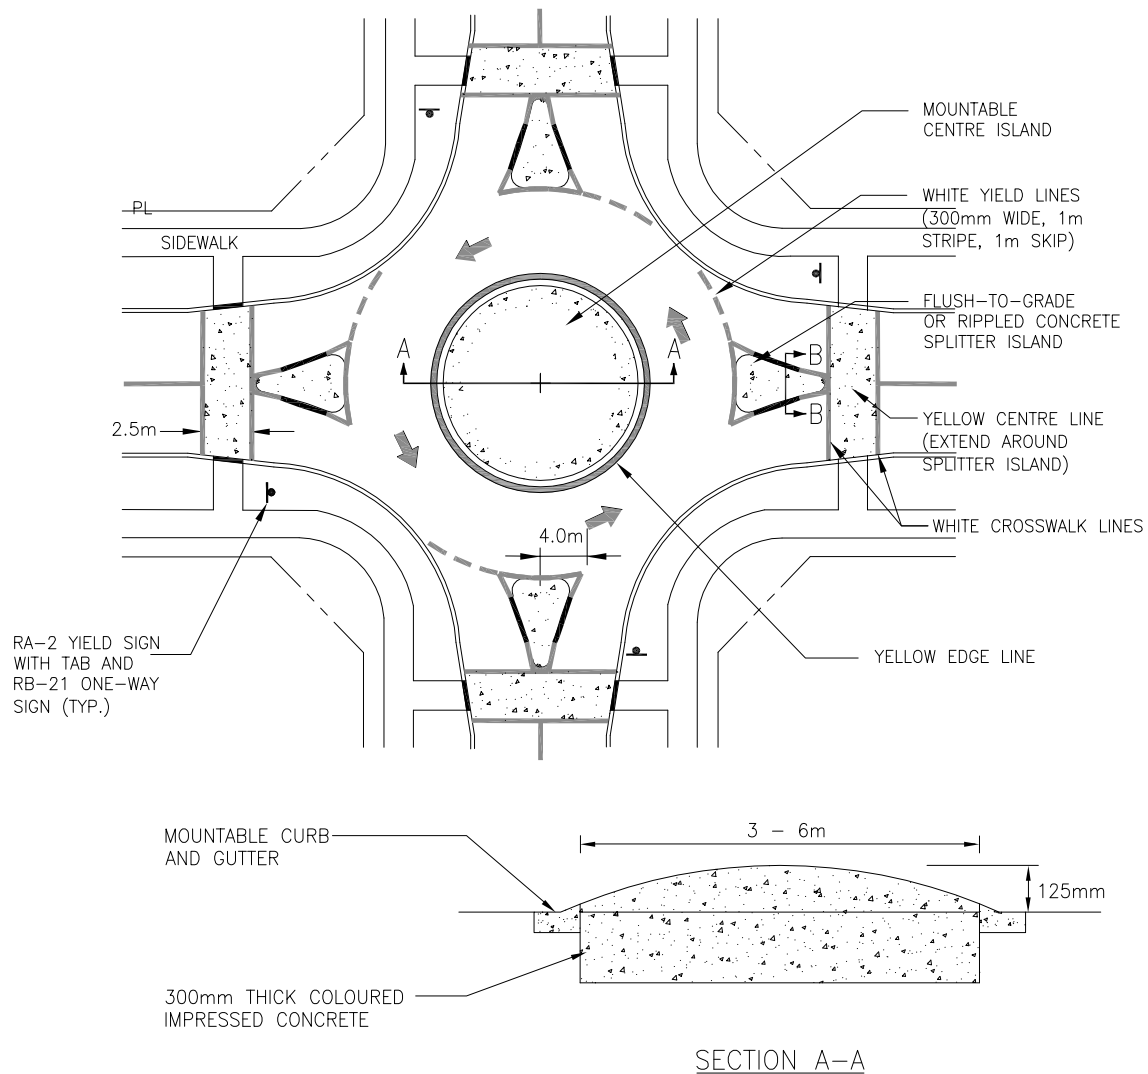


NOTES:



1. ALL APPROACHES TO BE UNDER YIELD CONTROL.
2. ALL SIGNS TO BE HIGH INTENSITY REFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
3. COLOUR AND PATTERN OF IMPRESSED CONCRETE TO BE CONFIRMED WITH CITY ENGINEERING DEPARTMENT AND SPECIFIED IN CONTRACT.
4. INSTALL ADVANCE WARNING SIGNS IN ACCORDANCE WITH STD. DWG. J-1.

mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED

PAVEMENT MARKING DETAIL

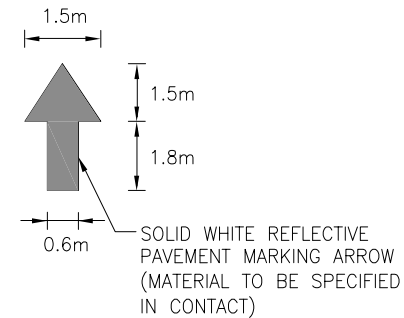



APPROACH SIGNAGE

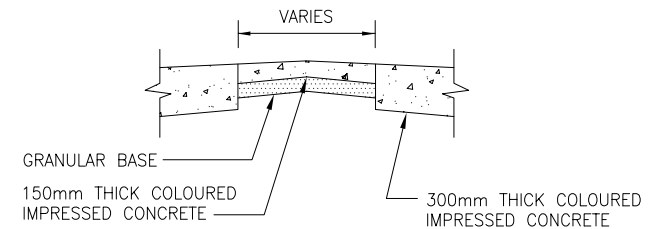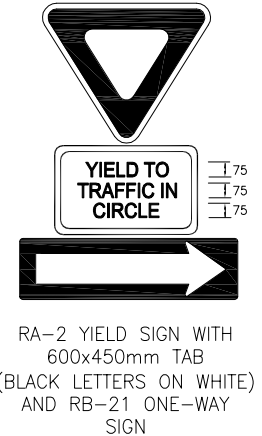


SECTION B-B

4.		
3.		
2.		
1.		
REVISIONS		DATE
Vaughan <i>The City Above Toronto</i> ENGINEERING DEPARTMENT		
CITY OF VAUGHAN ENGINEERING STANDARD		
MINI-ROUNDABOUT		
NOT TO SCALE		DESIGNED: ____ P.W.
REVISION: _____		DATE: MARCH 2004
		STD. DWG. J - 7

Acad File: R:\ENGORAF\\$\$\$Design Std Drawings 2004\J-Traffic Calming\J-8.dwg

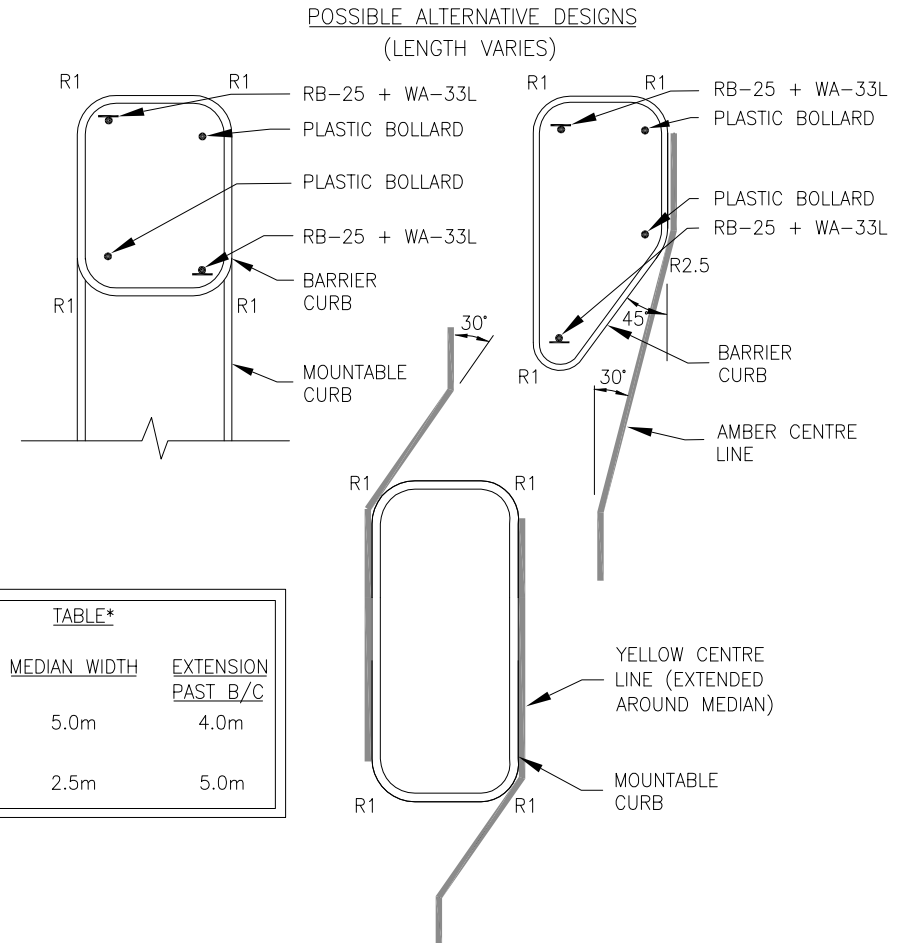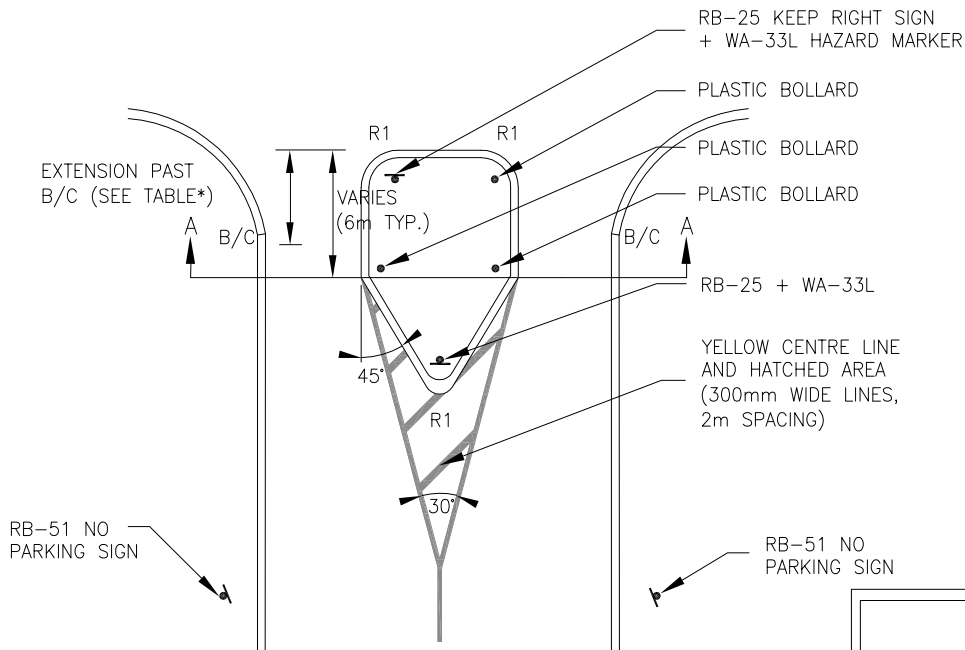

TABLE*		
ROAD	MEDIAN WIDTH	EXTENSION PAST B/C
COLLECTOR	5.0m	4.0m
PRIMARY/FEEDER	2.5m	5.0m



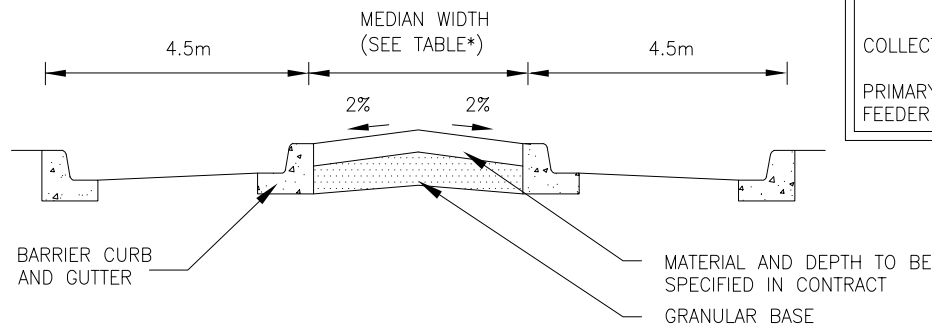


NOTES:


1. POST NO PARKING SIGNS 15m EITHER SIDE OF ALL MEDIAN TYPES (BOTH SIDES).
2. ALL SIGNS TO BE HIGH INTENSITY REFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
3. PLASTIC BOLLARD TYPE TO BE SPECIFIED IN CONTRACT.
4. INSTALL ADVANCE WARNING SIGNS IN ACCORDANCE WITH STD. DWG. J-1.

mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
Vaughan The City Above Toronto ENGINEERING DEPARTMENT		
CITY OF VAUGHAN ENGINEERING STANDARD		
TRAFFIC CALMING MEDIANS		
NOT TO SCALE	DESIGNED: P.W.	STD. DWG.
REVISION:	DATE: MARCH 2004	J - 8

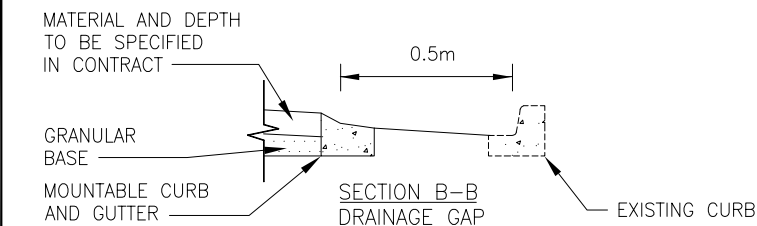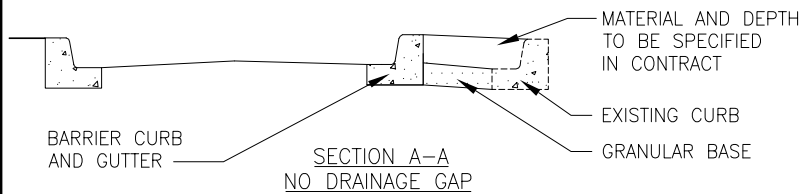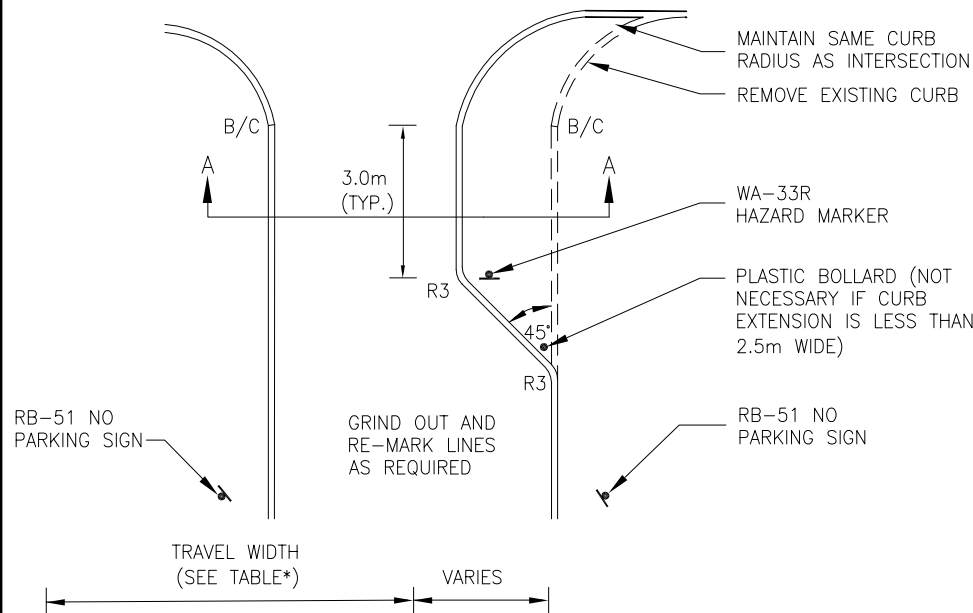

TABLE*	
ROAD	TRAVEL WIDTH
COLLECTOR	8.0m
PRIMARY/ FEEDER	7.0m
LOCAL	6.0m

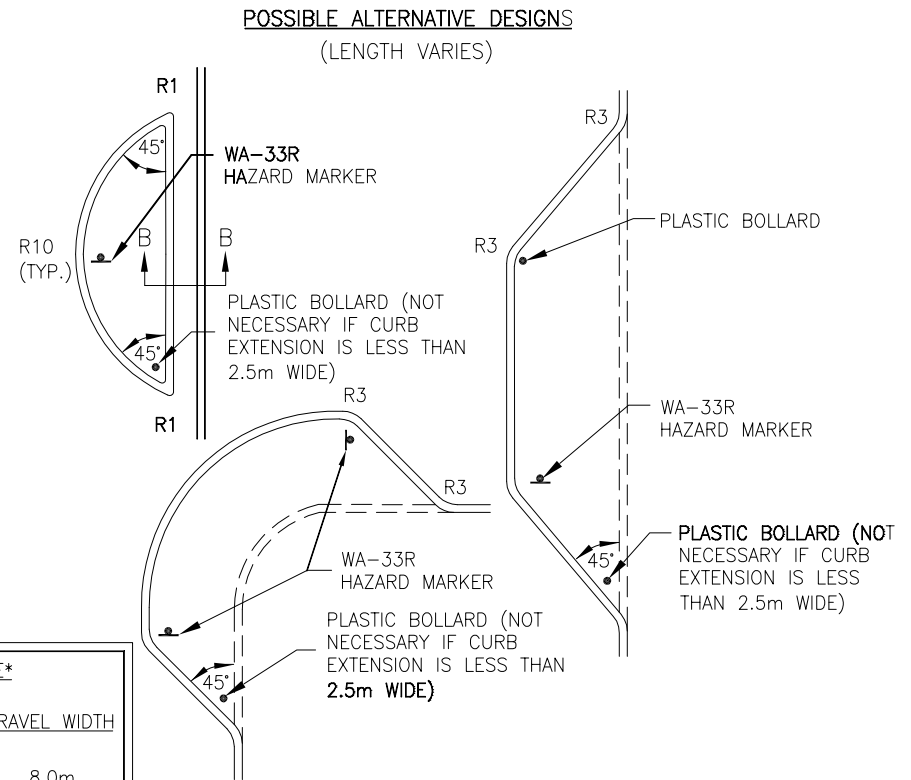



NOTES:

1. POST NO PARKING SIGNS 15m EITHER SIDE OF ALL CURB EXTENSION TYPES (BOTH SIDES).
2. ALL SIGNS TO BE HIGH INTENSITY REFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
3. PLASTIC BOLLARD TYPE TO BE SPECIFIED IN CONTRACT.
4. INSTALL ADVANCE WARNING SIGNS IN ACCORDANCE WITH STD. DWG. J-1.

mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
 Vaughan The City Above Toronto  ENGINEERING DEPARTMENT		
CITY OF VAUGHAN ENGINEERING STANDARD		
CURB EXTENSIONS and ROAD NARROWINGS		
NOT TO SCALE	DESIGNED: _____ P.W.	STD. DWG.
REVISION: _____	DATE: MARCH 2004	J - 9

FILE: O:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria\2020-21\City Standards Update Folder\CoSStandardsDrawings_CAD_2021\R-124 - Ladder Pavement Marking at Signalized Intersection.dwg

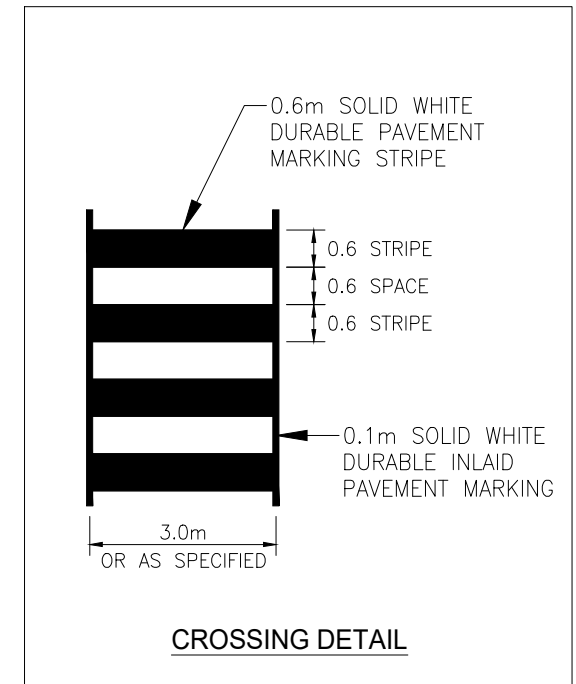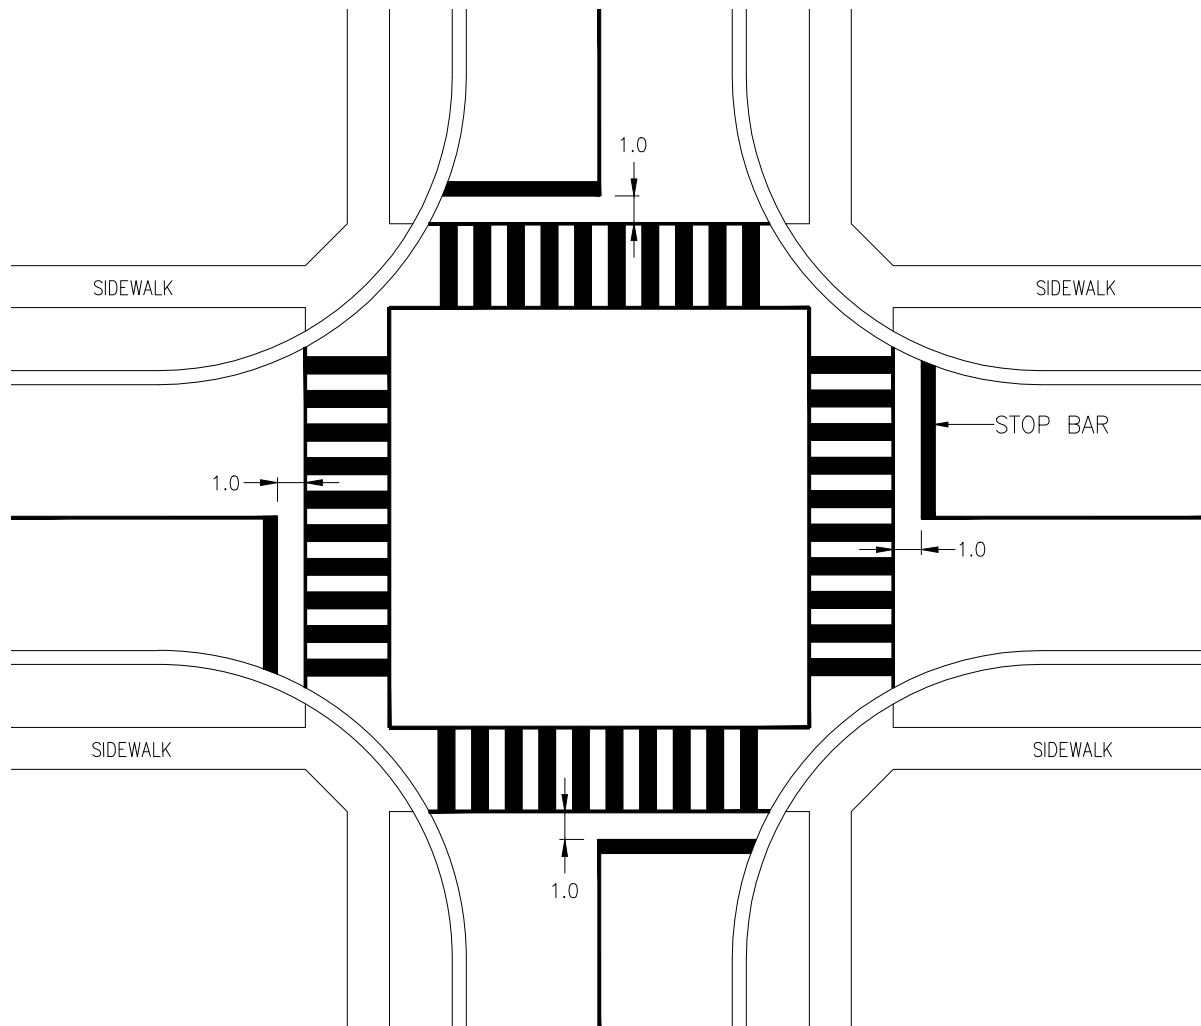


CROSSING DETAIL

m DIMENSIONS IN METRES
EXCEPT AS NOTED

NOTES

1. ALL PAVEMENT MARKINGS SHALL BE DURABLE INLAID AS PER CONTRACT SPECIFICATIONS, UNLESS DIRECTED OTHERWISE.
2. TO PREVENT SLIPPAGE, THE FIRST STEP FROM THE CURB SHOULD NOT LAND ON A PAINTED BAR.
3. AT SKEW ANGLE CROSSWALKS, LADDER CROSSWALK MARKINGS ARE TO BE INSTALLED PARALLEL TO THE TRAFFIC FLOW (ie. ANGLED FOR THE PEDESTRIAN)
4. THIS DETAIL IS TO BE USED AS A GUIDE ONLY AND WILL REQUIRE ADJUSTMENTS TO SUIT FIELD CONDITIONS.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
LADDER PAVEMENT MARKING DETAIL AT SIGNALIZED INTERSECTIONS		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	R - 124

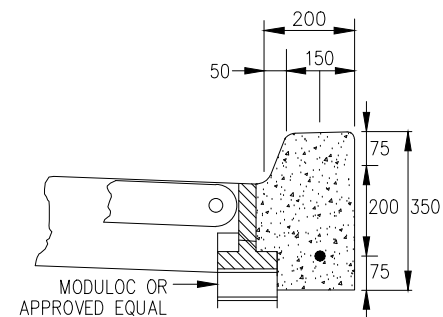[illegible]

1. CATCHBASINS INITIALLY SET TO BASE OR CURB COURSE ASPHALT (WHICH EVER IS LOWER) WITH TEMPORARY ASPHALT CURB AND GUTTER BETWEEN EXPANSION JOINTS.
2. CATCHBASINS RAISED TO FINAL GUTTER LEVEL WITH MODULOC OR EQUAL, AND FULL CONCRETE CURB POURED PRIOR TO FINAL ASPHALT COURSE.
3. IN INDUSTRIAL/COMMERCIAL SUBDIVISIONS CB'S TO BE INSTALLED IN THE MIDDLE OF THE LOTS
4. INSTALL CURB DOWELS TO MAINTAIN CURB INTEGRITY

4.		
3.		
2.		
1.		
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD

CATCHBASIN CURB DETAIL

R - 125

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

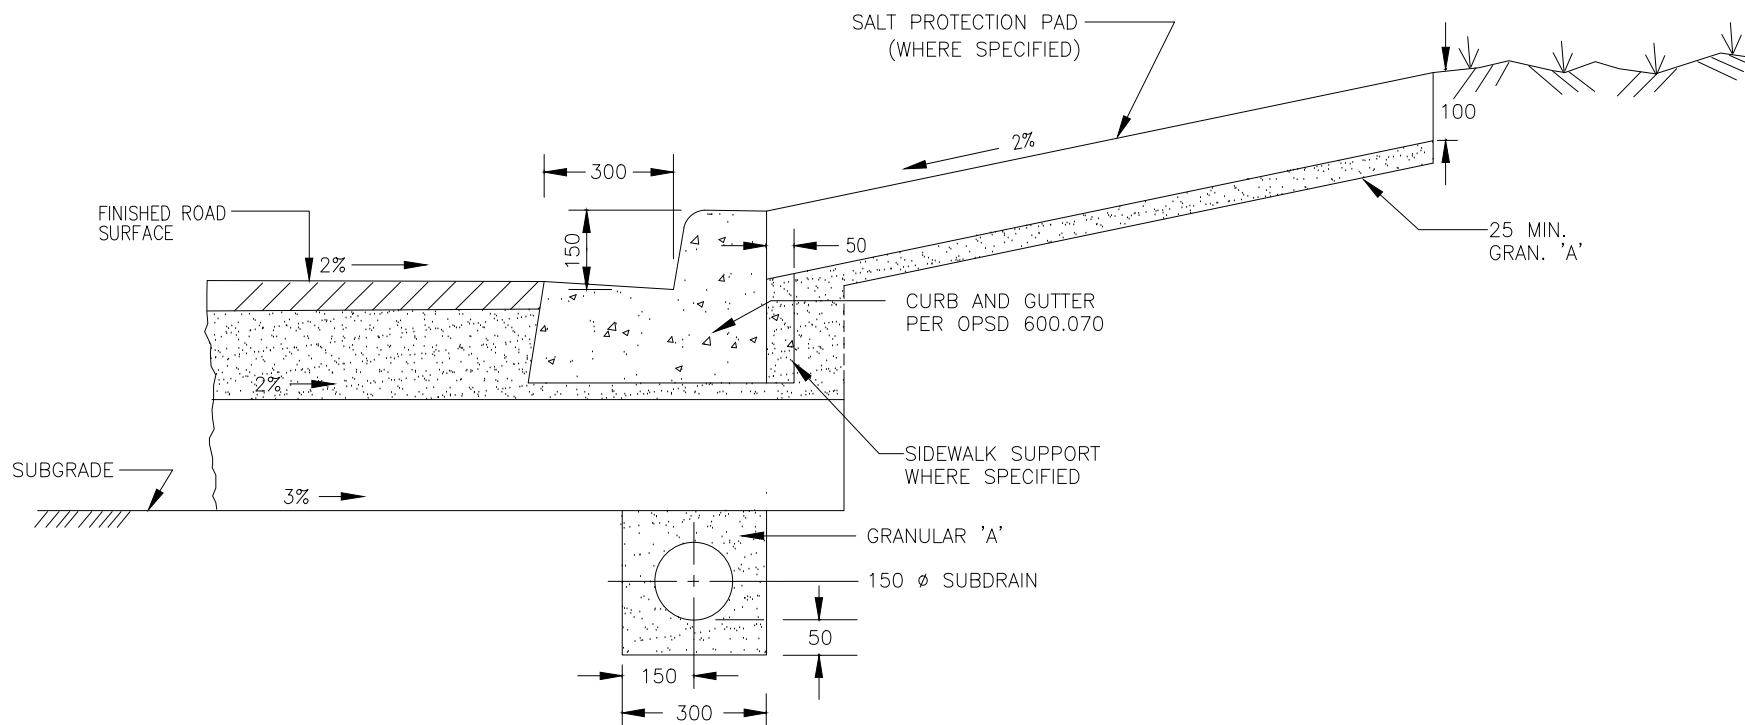

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTES

1. ALL SUBDRAIN CONNECTIONS TO BE MADE ON BOTH SIDES OF THE CATCH BASIN AND TO BE MORTARED AT THE INSIDE AND OUTSIDE OF THE CATCH BASIN WALLS UNLESS USING RUBBER GASKET CONNECTORS. THE SUBDRAIN SHALL BE CONTINUOUS PLUGGED WITH MANUFACTURED PLUG AT THE HIGH POINT WHERE THERE IS NO CATCHBASIN.
2. PIPE SHALL BE 150mm Ø POLYETHYLENE WRAPPED IN FILTER FABRIC.
3. FILTER FABRIC SHALL BE IN ACCORDANCE WITH ONTARIO PROVINCIAL STANDARD SPECIFICATIONS
4. SUBDRAIN SHALL BE PLACED UNDER ALL CURB AND GUTTER.

4.		
3.		
2.		
1.		
	REVISIONS	DATE


VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD



CURB AND SUBDRAIN DETAIL

NOT TO SCALE	DESIGNED: _____	STD. DWG. R - 126
REVISION: _____	DATE: DEC. 2020	

R-127 - UNIT PAVER CROSSWALK DETAIL

CURRENTLY UNDER DEVELOPMENT

Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

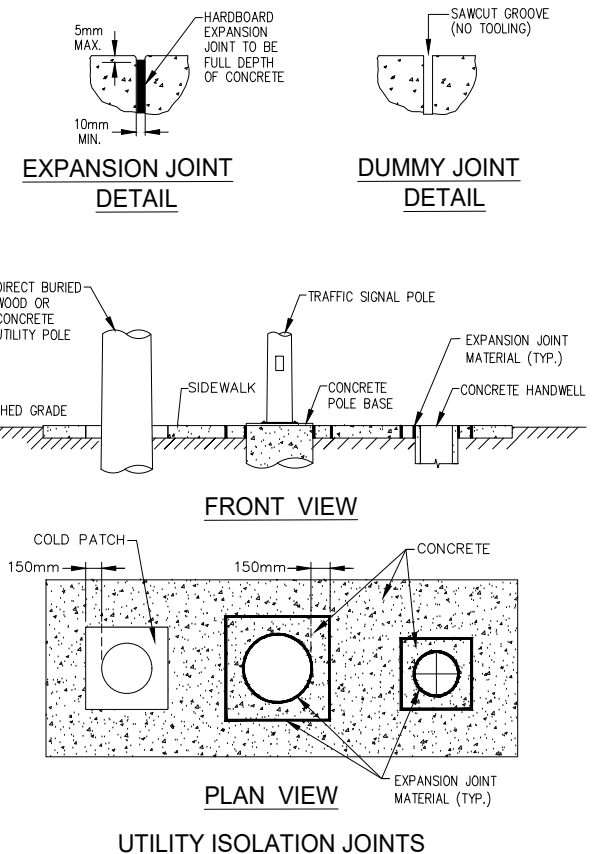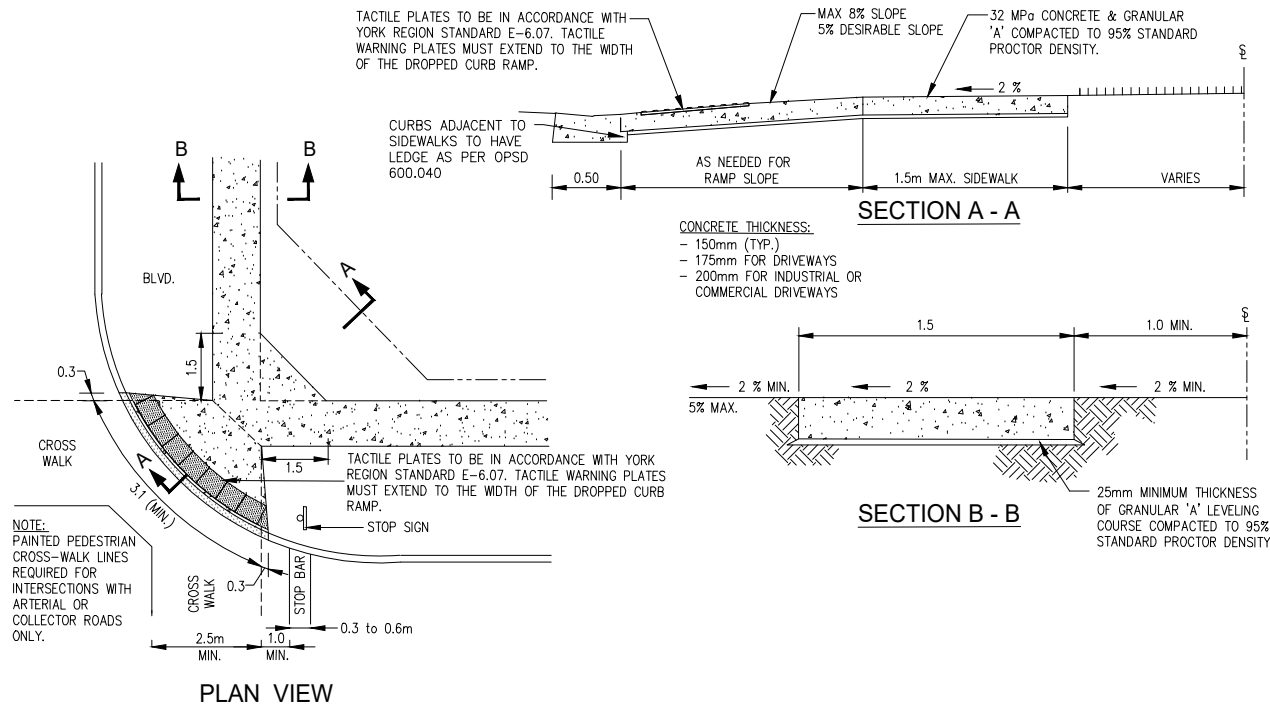

NOTES

- CSA A23-1.00 CLASS C2 (32 MPa) CONCRETE, MAXIMUM CEMENT/WATER RATIO 0.45 WITH 6% AIR ENTRAINMENT $\pm 1\%$.
- WHERE SIDEWALK CONSTRUCTION INVOLVES CUT OR FILL, ADDITIONAL WIDENING MAY BE REQUIRED.
- CONCRETE TO HAVE BROOM FINISH, PERPENDICULAR TO THE SIDEWALK LENGTH.
- EXPANSION JOINTS TO BE LOCATED EVERY 6m AND WHERE CONCRETE PAVING ABUTS OTHER STRUCTURES OR BUILDINGS. THEY MUST BE OF A NON-EXTRUDED RESILIENT BITUMINOUS OR NON-BITUMINOUS MATERIAL - 10mm THICK.
- INSTALL UTILITY ISOLATION JOINTS AT ALL NEW AND EXISTING UTILITY POLES, TRAFFIC SIGNAL POLES, HAND WELLS, MAINTENANCE HOLES, VALVE CHAMBERS, VALVE BOXES ACCORDANCE WITH YORK REGION STANDARD E-2.20 AND OPSD 310.040.
- CONCRETE TO BE SPRAYED WITH WHITE PIGMENT CURING COMPOUND IMMEDIATELY AFTER FINISHING.
- CAST IRON TACTILE PLATES TO BE IN ACCORDANCE WITH YORK REGION STANDARD E-6.07. TACTILE WARNING PLATES MUST EXTEND TO THE WIDTH OF THE DROPPED CURB RAMP.
- ALL PERPENDICULAR TOOL MARKINGS FROM FINISHING TOOLS FOR EXPANSION JOINTS ARE TO BE BROOMED OUT SO NONE EXIST.
- DUMMY JOINTS TO BE LOCATED AT INTERVALS OF 1.5m. THEY ARE TO BE SAWCUT TO 1/4 DEPTH OF CONCRETE, AFTER THE CONCRETE HAS PARTIALLY HARDENED.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.	REVISED STANDARD - TACTILE PLATE NOTE	OCT. 24
1.	REVISED STANDARD	NOV. 22
	REVISIONS	DATE



VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD

SIDEWALK AND RAMP

(LOCAL ROAD RETROFIT ONLY)

NOT TO SCALE	DESIGNED: _____	STD. DWG. R - 128
REVISION: <u>2</u>	DATE: <u>DEC. 2020</u>	

4.		
3.		
2.		
1.		
	REVISIONS	DATE



VAUGHAN


CITY OF VAUGHAN ENGINEERING STANDARD

WALKWAYS


NOT TO SCALE	DESIGNED: _____	STD. DWG. R - 129
REVISION: _____	DATE: <u>DEC. 2020</u>	

R-130 - BOLLARD DETAIL
CURRENTLY UNDER DEVELOPMENT


Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

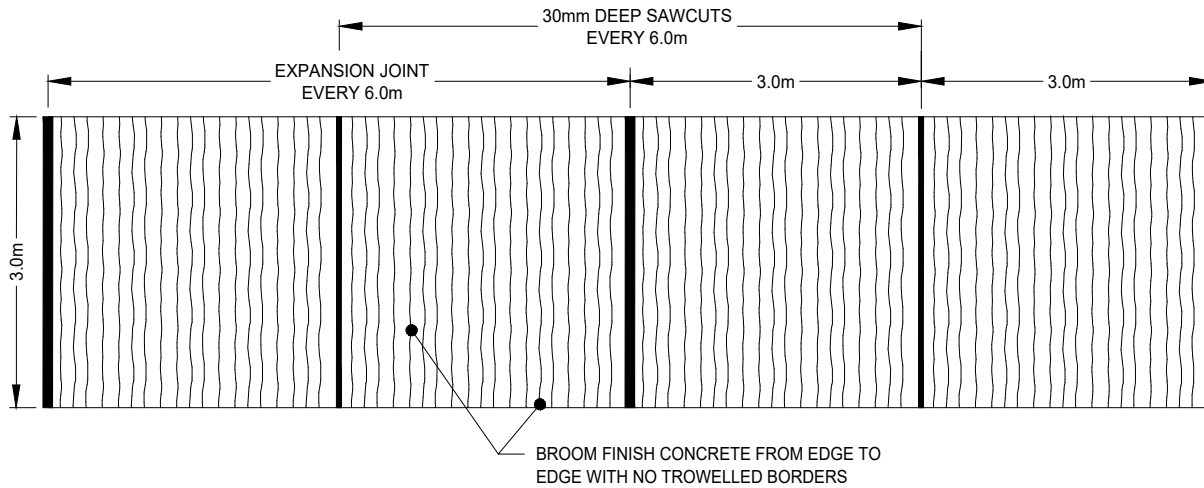

PLAN VIEW

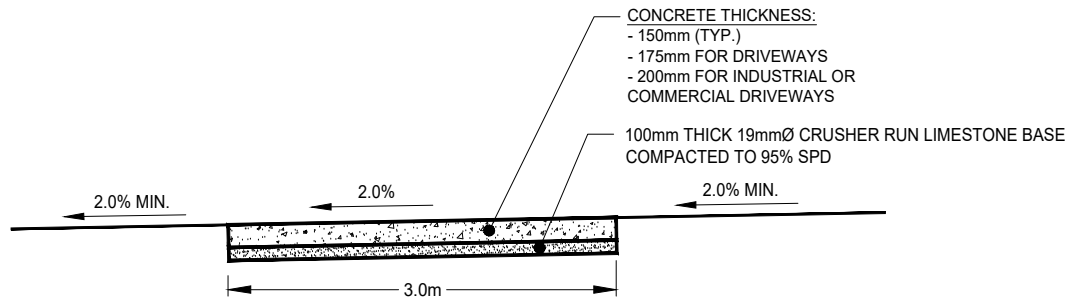

SECTION VIEW

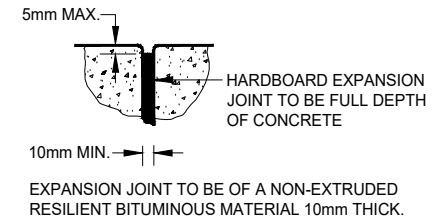


EXPANSION JOINT DETAIL

m DIMENSIONS IN METRES
EXCEPT AS NOTED

NOTES

1. CSA A23-1.00 CLASS C2 (32 MPa) CONCRETE, MAXIMUM CEMENT/WATER RATIO 0.45 WITH 6% AIR ENTRAINMENT $\pm 1\%$.
2. CONCRETE TO BE SPRAYED WITH WHITE PIGMENT CURING COMPOUND IMMEDIATELY AFTER FINISHING.
3. INTERSECTION RAMPS WITH TACTILE PLATES SHALL BE BUILT AS PER CITY OF VAUGHAN SIDEWALK AND RAMP STANDARD DRAWING R-128.
4. ALL PERPENDICULAR TOOL MARKINGS FROM FINISHING TOOLS FOR EXPANSION JOINTS ARE TO BE BROOMED SO NONE EXIST.
5. THE USE OF CONCRETE MULTI-USE PATH IS SUBJECT TO APPROVAL OF THE CITY.

5.		
4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
CONCRETE MULTI-USE PATH DETAIL		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: MAY 2022	R - 131

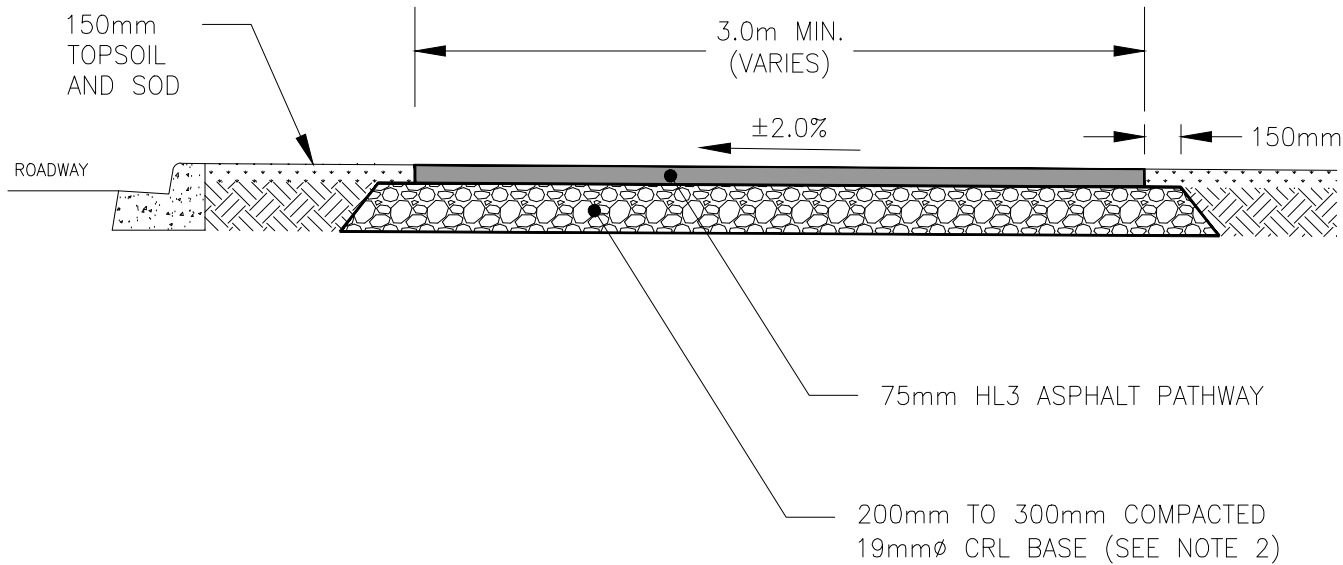

NOTES


1. PAVEMENT MARKINGS THROUGH INDUSTRIAL & COMMERCIAL DRIVEWAYS SHALL BE REQUIRED AS SPECIFIED.
2. GRANULAR AT EXISTING RESIDENTIAL DRIVEWAYS TO BE 300mm DEPTH AND ASPHALT 50mm HL8 BASE COURSE ASPHALT AND 25mm DEPTH HL-3F SURFACE COURSE ASPHALT.
3. A MULTI-USE OR CYCLE TRACK CROSSING THROUGH A INDUSTRIAL/COMMERCIAL/INSTITUTIONAL ENTRANCE SHALL HAVE 350mm COMPACTED DEPTH 50mm CRUSHER-RUN LESTONE, 125mm COMPACTED DEPTH 20mm CRUSHER RUN LESTONE BASE, 75mm DEPTH HL8 BASE COURSE ASPHALT AND 50mm DEPTH HL3 SURFACE COURSE ASPHALT.
4. ALL ASPHALT AND GRANULAR BASE THICKNESS SPECIFICATIONS ARE MINIMUM AFTER COMPACTION.
5. SLOPE SUBGRADE PARALLEL TO FINISHED GRADE (MIN. 2% SLOPE).
6. CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL AND REPLACEMENT OF ANY UNSUITABLE SUBGRADE MATERIAL SUCH AS TOPSOIL. REMOVE ALL EXCAVATED MATERIAL AND DISPOSE OF OFF SITE.

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.			
3.			
2.			
1.			
REVISIONS		APR'D	DATE
			
CITY OF VAUGHAN ENGINEERING STANDARD			
ACTIVE TRANSPORTATION FACILITY (MULTI-USE ASPHALT PATHWAY)			
NOT TO SCALE		APPROVED: _____	
DESIGNED: _____		DATE: MAY 2022	
STD. DWG.			R - 132

Acad File: C:\Infrastructure Delivery\Infrastructure Programming\VAO\City Standards\Design Office\2020\City Standards Update\Folder\CityStandardsDrawings_CAD_2022\R-133 - Pedestrian & Cycling Facilities.dwg

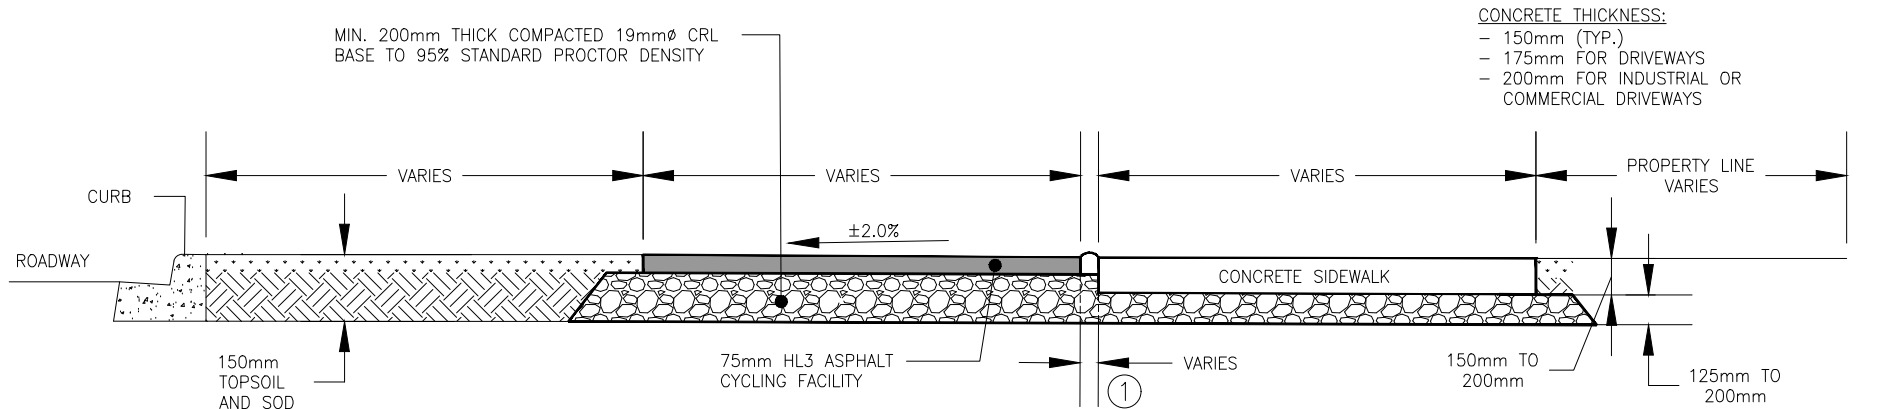


CYCLING FACILITY NOTES:

1. BUFFER BETWEEN CYCLING FACILITY AND SIDEWALK PER ONTARIO TRAFFIC MANUAL BOOK 18 (CONTINUOUS BEVELLED CURB OR TACTILE BUFFER PER OTM BOOK 18)
2. PAVEMENT MARKINGS THROUGH INDUSTRIAL & COMMERCIAL DRIVEWAYS SHALL BE REQUIRED AS SPECIFIED.
3. GRANULAR AT EXISTING RESIDENTIAL DRIVEWAYS TO BE 300mm DEPTH AND ASPHALT 50mm HL8 BASE COURSE ASPHALT AND 25mm DEPTH HL-3F SURFACE COURSE ASPHALT.
4. A MULTI-USE OR CYCLE TRACK CROSSING THROUGH A INDUSTRIAL/COMMERCIAL/INSTITUTIONAL ENTRANCE SHALL HAVE 350mm COMPACTED DEPTH 50mm CRUSHER-RUN LIMESTONE, 125mm COMPACTED DEPTH 20mm CRUSHER RUN LIMESTONE BASE, 75mm DEPTH HL8 BASE COURSE ASPHALT AND 50mm DEPTH HL3 SURFACE COURSE ASPHALT.
5. ALL ASPHALT AND GRANULAR BASE THICKNESS SPECIFICATIONS ARE MINIMUM AFTER COMPACTION.

SIDEWALK NOTES:

1. CSA A23-1.00 CLASS C2 (32 MPa) CONCRETE, MAXIMUM CEMENT/WATER RATIO 0.45 WITH 6% AIR ENTRAINMENT $\pm 1\%$.
2. WHERE SIDEWALK CONSTRUCTION INVOLVES CUT OR FILL, ADDITIONAL WIDENING MAY BE REQUIRED.
3. CONCRETE TO HAVE BROOM FINISH, PERPENDICULAR TO THE SIDEWALK LENGTH.
4. EXPANSION JOINTS TO BE LOCATED EVERY 6m AND WHERE CONCRETE PAVING ABUTS OTHER STRUCTURES OR BUILDINGS. THEY MUST BE OF A NON-EXTRUDED RESILIENT BITUMINOUS OR NON-BITUMINOUS MATERIAL - 10mm THICK.
5. DUMMY JOINTS TO BE LOCATED AT INTERVALS OF 1.5m. THEY ARE TO BE SAWCUT TO 1/4 DEPTH OF CONCRETE, AFTER THE CONCRETE HAS PARTIALLY HARDENED.
6. CONCRETE TO BE SPRAYED WITH WHITE PIGMENT CURING COMPOUND IMMEDIATELY AFTER FINISHING.
7. CAST IRON TACTILE PLATES TO BE IN ACCORDANCE WITH YORK REGION STANDARD.
8. ALL PERPENDICULAR TOOL MARKINGS FROM FINISHING TOOLS FOR EXPANSION JOINTS ARE TO BE BROOMED OUT SO NONE EXIST.

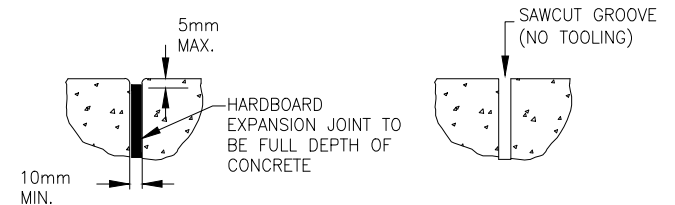

CONCRETE EXPANSION JOINT DETAIL

CONCRETE DUMMY JOINT DETAIL

mm DIMENSIONS IN MILLIMETRES EXCEPT AS NOTED

4.			
3.			
2.			
1.			
REVISIONS		APR'D	DATE




CITY OF VAUGHAN ENGINEERING STANDARD

PEDESTRIAN AND CYCLING FACILITIES

NOT TO SCALE APPROVED: _____
DESIGNED: _____ DATE: MAY 2022

STD. DWG.
R - 133

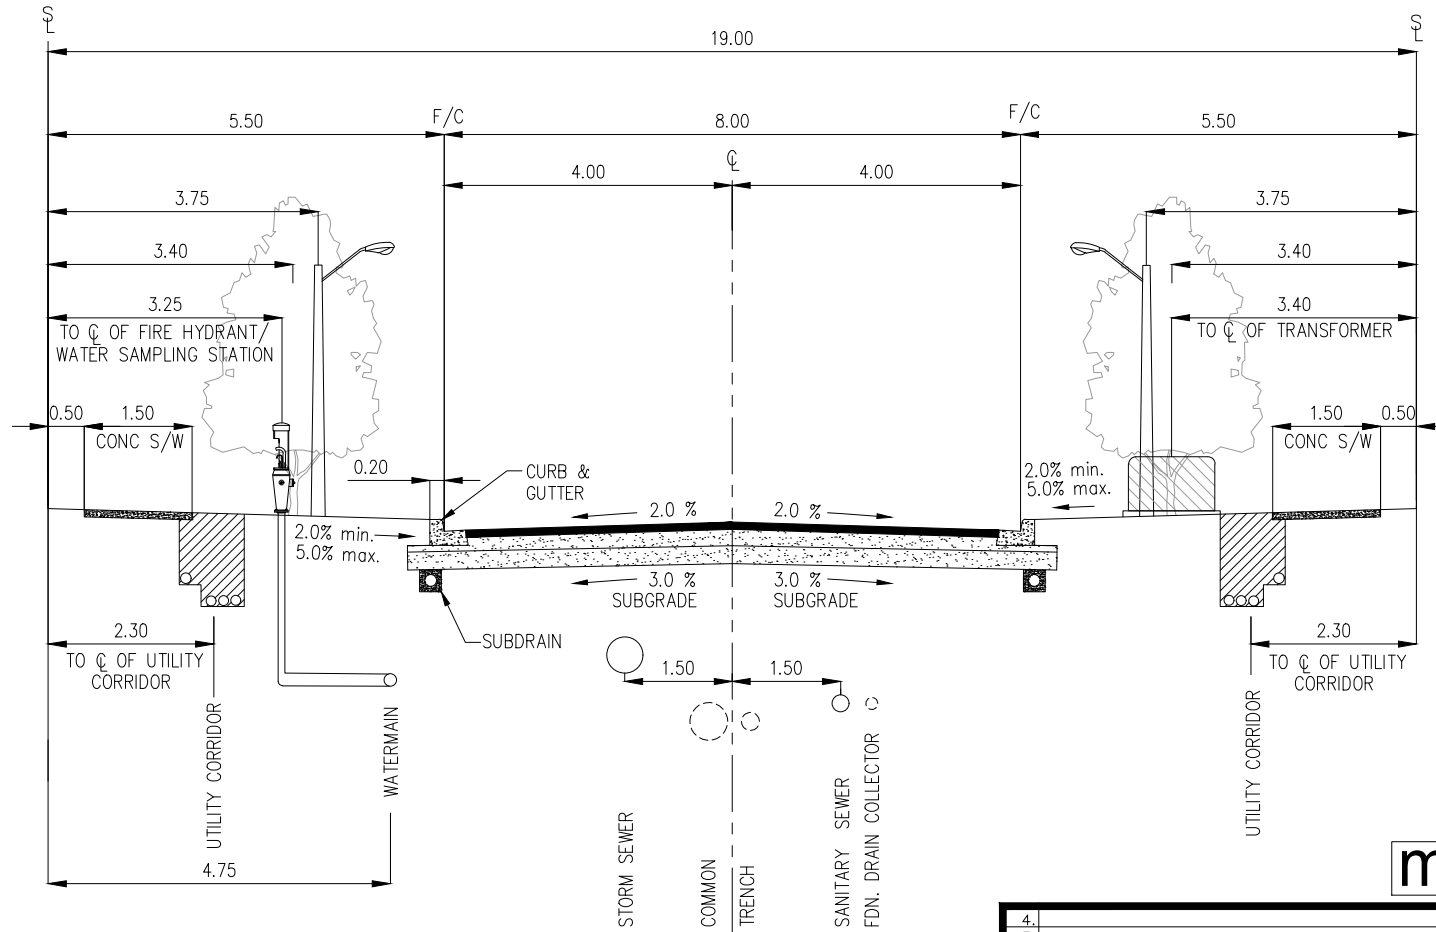

m DIMENSIONS IN METERS
EXCEPT AS NOTED

NOTES


1. PAVEMENT WIDTH IS DESIGNED TO ACCOMMODATE 2 TRAVEL LANES WITH 1 PARKING LANE.
2. PAVEMENT DESIGN SHALL CONFORM TO MINIMUM CITY STANDARDS AND/OR APPROVED GEOTECHNICAL REPORT.
3. ACTIVELY GROWING No. 1 NURSERY SOD TO BE LAID ON 150mm OF TOPSOIL, PROPERLY GRADED AND ROLLED.
4. DEPTH OF COVER ON ALL MUNICIPAL INFRASTRUCTURE SHALL CONFORM TO MINIMUM CITY STANDARDS.
5. IF TRANSFORMER IS ON SIDE LOT, TURN FOUNDATION 90° TO FACE ONCOMING TRAFFIC INSTALL 1.70m TO CENTER OF FOUNDATION.
6. TRANSFORMER FOUNDATION TO ABUT EDGE OF TRENCH.

4.		
3.		
2.		
1.	STANDARD CREATED	JAN. 21
	REVISIONS	DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
MAJOR LOCAL ROAD		
19m R.O.W. - 8m PAVEMENT		
NOT TO SCALE	DESIGNED: ENG. DEPT.	STD. DWG.
REVISION: 1	DATE: JAN. 2021	R - 134



mm DIMENSIONS IN MILLIMETERS
EXCEPT AS NOTED

R - 135

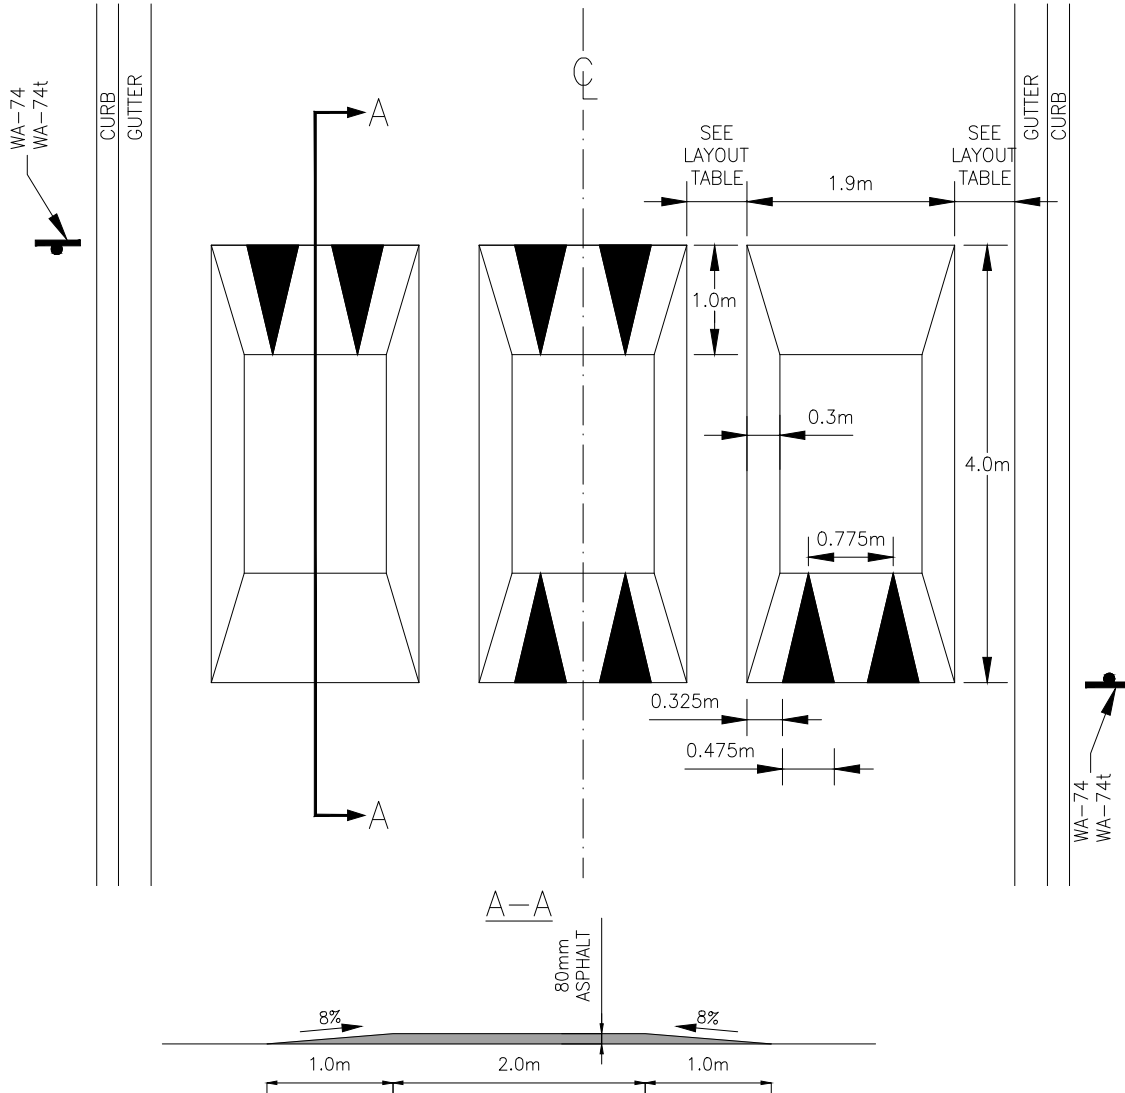

LAYOUT TABLE


ROAD WIDTH EXCLUDING GUTTER	NUMBER OF CUSHIONS	DIMENSION	
		FROM GUTTER	BETWEEN CUSHIONS
7.0m	3	0.25m	0.4m
8.0m	3	0.7m	0.45m
9.0m	3	0.4m	1.25m
11.0m	4	0.5m	0.8m
13.6m	5	0.45m	0.8m
14.1m	5	0.5m	0.9m

DIMENSIONS NOTES:


1. MINIMUM WIDTH BETWEEN FACE OF CURB AND SPEED CUSHION: 0.55m.
2. MINIMUM WIDTH BETWEEN SPEED CUSHIONS: 0.45m, MAXIMUM: 1.25m.

NOTES:



1. MINIMUM 60m SPACING BETWEEN SPEED CUSHIONS.
2. IMPLEMENT FOUR CUSHIONS IN LOCATIONS WHERE THE GAP BETWEEN THE CUSHIONS CAN ACCOMMODATE 0.4m ON BOTH SIDES.
3. AVOID IMPLEMENTATION IN PROXIMITY TO DRIVEWAYS, INTERSECTIONS, AND/OR TRAFFIC SIGNALS.
4. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
5. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.
6. IN LOCATIONS WHERE CENTRELINE WAS PAINTED, MARKING TO BE REINSTATED.
7. IN LOCATIONS WHERE CENTRELINE WAS PAINTED, TRIANGLE SHOULD NOT BE PAINTED IN OPPOSING LANE.
8. DESIGNER MAY NEED TO ADJUST CUSHION DESIGN IF THE LANE CONFIGURATION IS ASYMMETRIC.




4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
PERMANENT ASPHALT SPEED CUSHIONS		
NOT TO SCALE	DESIGNED: _____ P.W.	STD. DWG.
REVISION: _____ 0	DATE: _____ JAN. 2025	R-136

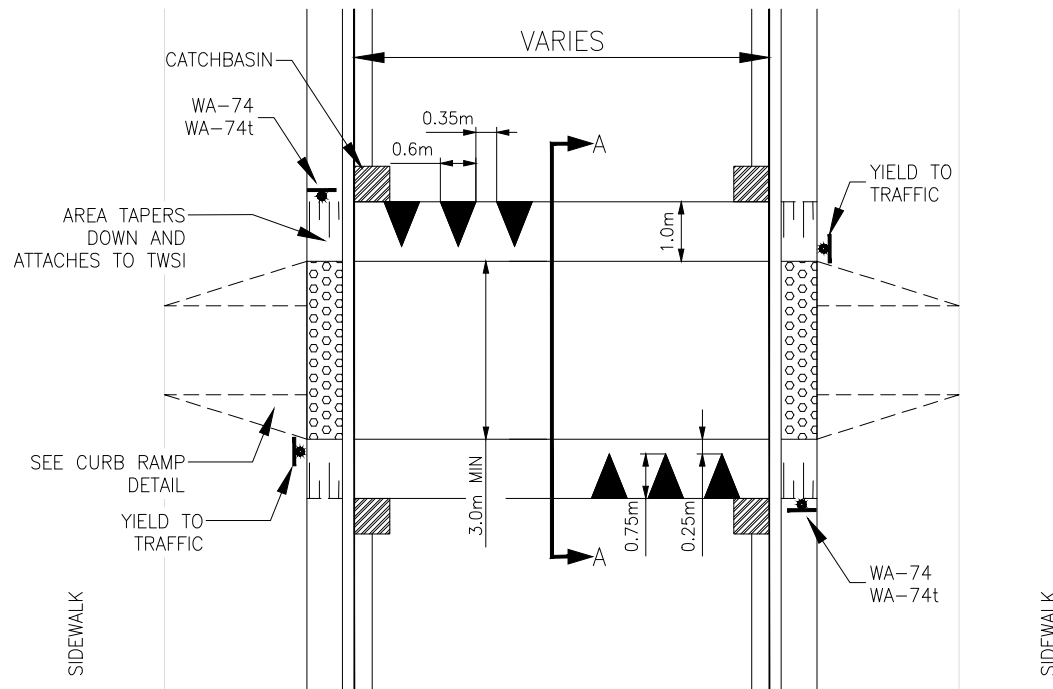

SINUSOIDAL SPEED HUMP DEVELOPMENT

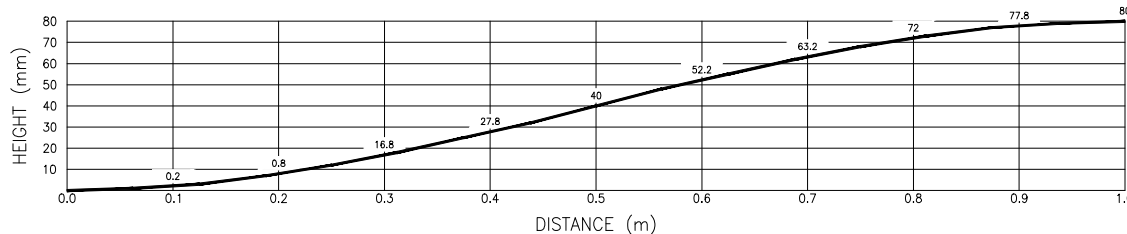

CURB RAMP DETAIL

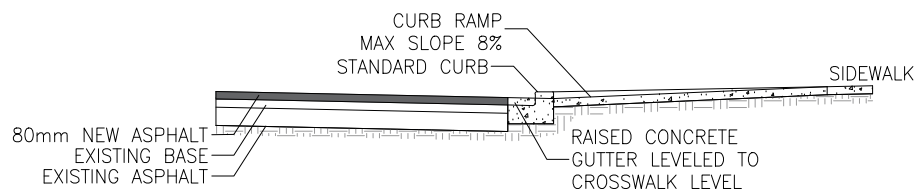

NOTES:

1. RAISED CROSSING TO BE IMPLEMENTED AT MIDBLOCK CONFIGURATION.
2. DRAINAGE NEEDS TO BE REVIEWED TO CONFIRM NEED FOR CATCH BASINS.
3. PAVEMENT MARKINGS AND SIGNAGE SHALL COMPLY WITH OTM BOOK 11.
4. TACTILE FEATURES PER AODA STANDARDS.
5. ADD THIRD PAVEMENT MARKING TRIANGLE ON EACH SIDE OF RAISED CROSSING IF ON COLLECTOR ROAD.
6. CATCH BASINS TO BE LOCATED AT BOTTOM OF RAMP, AS REQUIRED.
7. CHEVRON ARROWS DIMENSION: 0.75m HIGH BY 0.6m WIDE.
8. MIN 0.25m SPACE BETWEEN TOP OF RAMP AND CROSSWALK.
9. DESIGN SHALL HAVE REGARD FOR MANHOLE LOCATIONS AND OVERLAND FLOW ROUTES.
10. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE (OR EQUIVALENT) RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
11. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.



YIELD TO TRAFFIC WA-74t WA-74

4.		
3.		
2.		
1.		
REVISIONS		DATE





CITY OF VAUGHAN ENGINEERING STANDARD


RAISED UNCONTROLLED MIDBLOCK CROSSING

NOT TO SCALE DESIGNED: P.W.
REVISION: 0 DATE: JAN. 2025

STD. DWG.
R-137

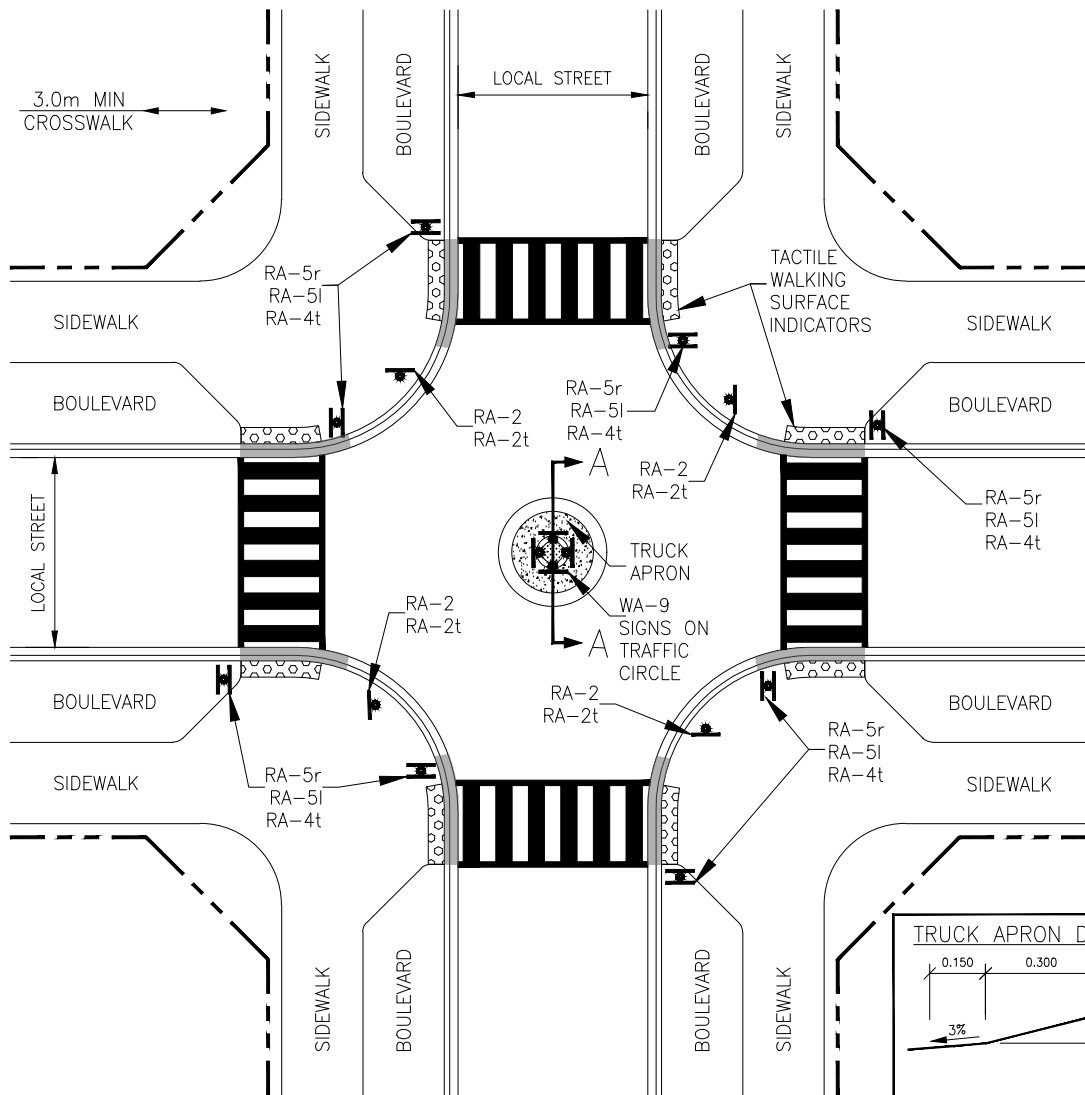

SECTION A-A

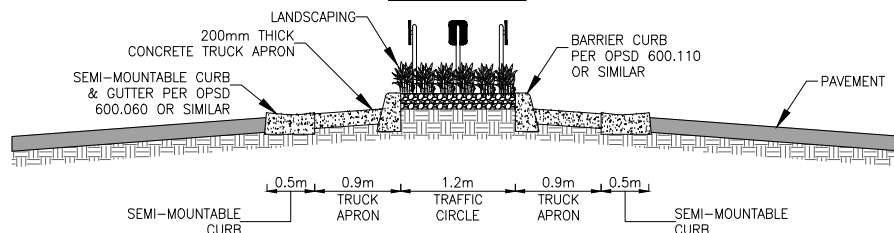

NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. TRAFFIC CIRCLE SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.
7. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION.
8. WC-15 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER OTM BOOK 18. WA-39 SIGN CAN BE IMPLEMENTED IN ADVANCE OF THE CROSSING PER MUTCD.
9. CROSSINGS IMPLEMENTATION AND RELATED SIGNAGE SHOULD BE DETERMINED ON A CASE-BY-CASE BASIS ACCORDING TO OTM BOOK 15 AND ENGINEERING JUDGEMENT.
10. WC-27r SIGNS (PEDESTRIAN CROSSING AHEAD) TO BE PLACED 20-50m FROM THE CROSSING



WC-27r RA-4t RA-5l RA-5r RA-2t RA-2 WA-9

4.		
3.		
2.		
1.		
REVISIONS		DATE






CITY OF VAUGHAN ENGINEERING STANDARD

TRAFFIC CIRCLE

NOT TO SCALE DESIGNED: _____ P.W.
 REVISION: _____ 0 DATE: _____ JAN. 2025

STD. DWG.
R-138a

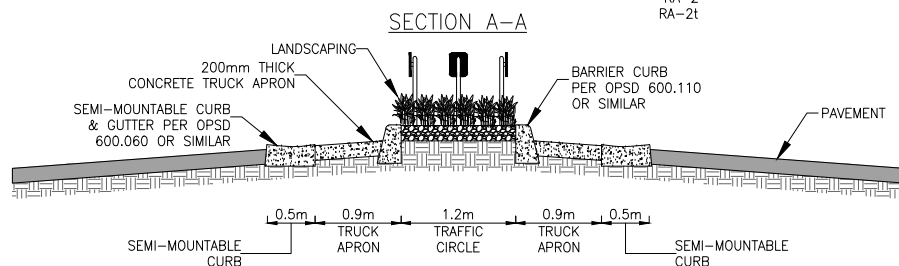
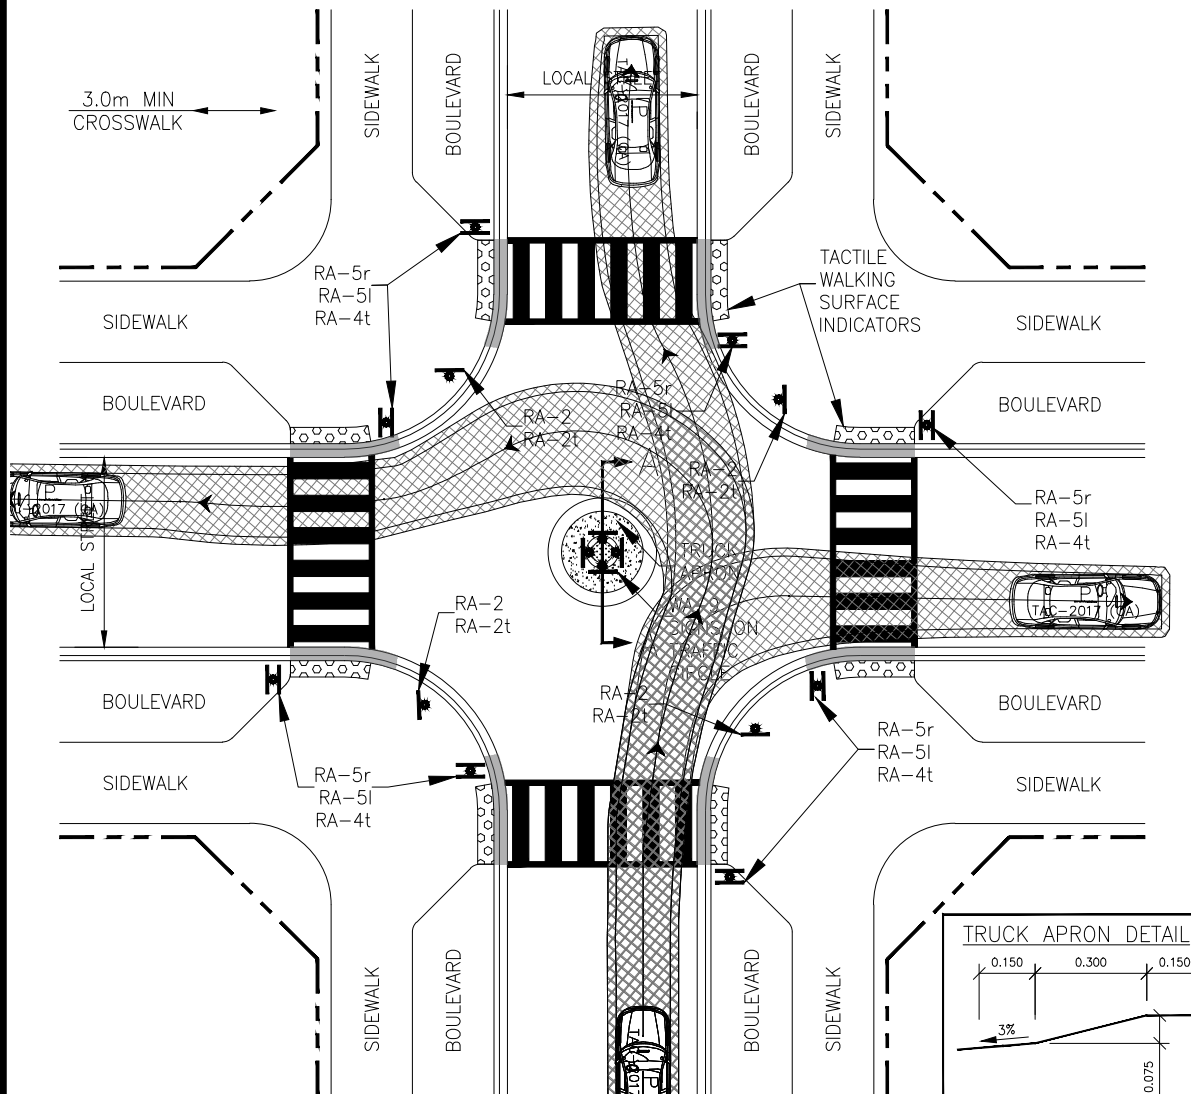


NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.
7. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION



4.		
3.		
2.		
1.		
REVISIONS		DATE
CITY OF VAUGHAN ENGINEERING STANDARD		
TRAFFIC CIRCLE		
(W. TURNING MOVEMENT 1)		
NOT TO SCALE	DESIGNED: P.W.	STD. DWG.
REVISION: 0	DATE: JAN. 2025	R-138b

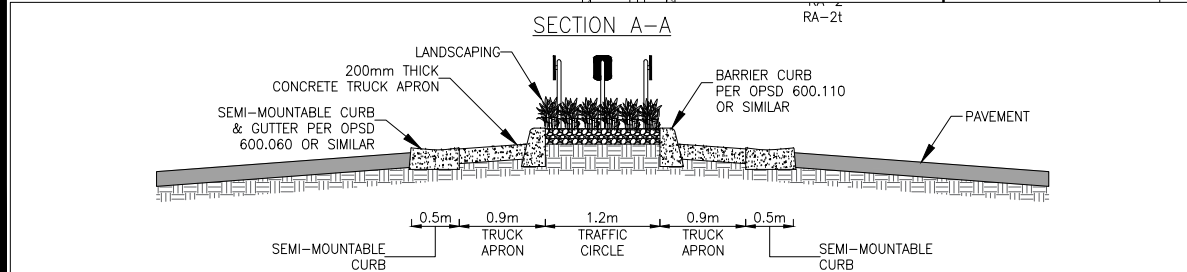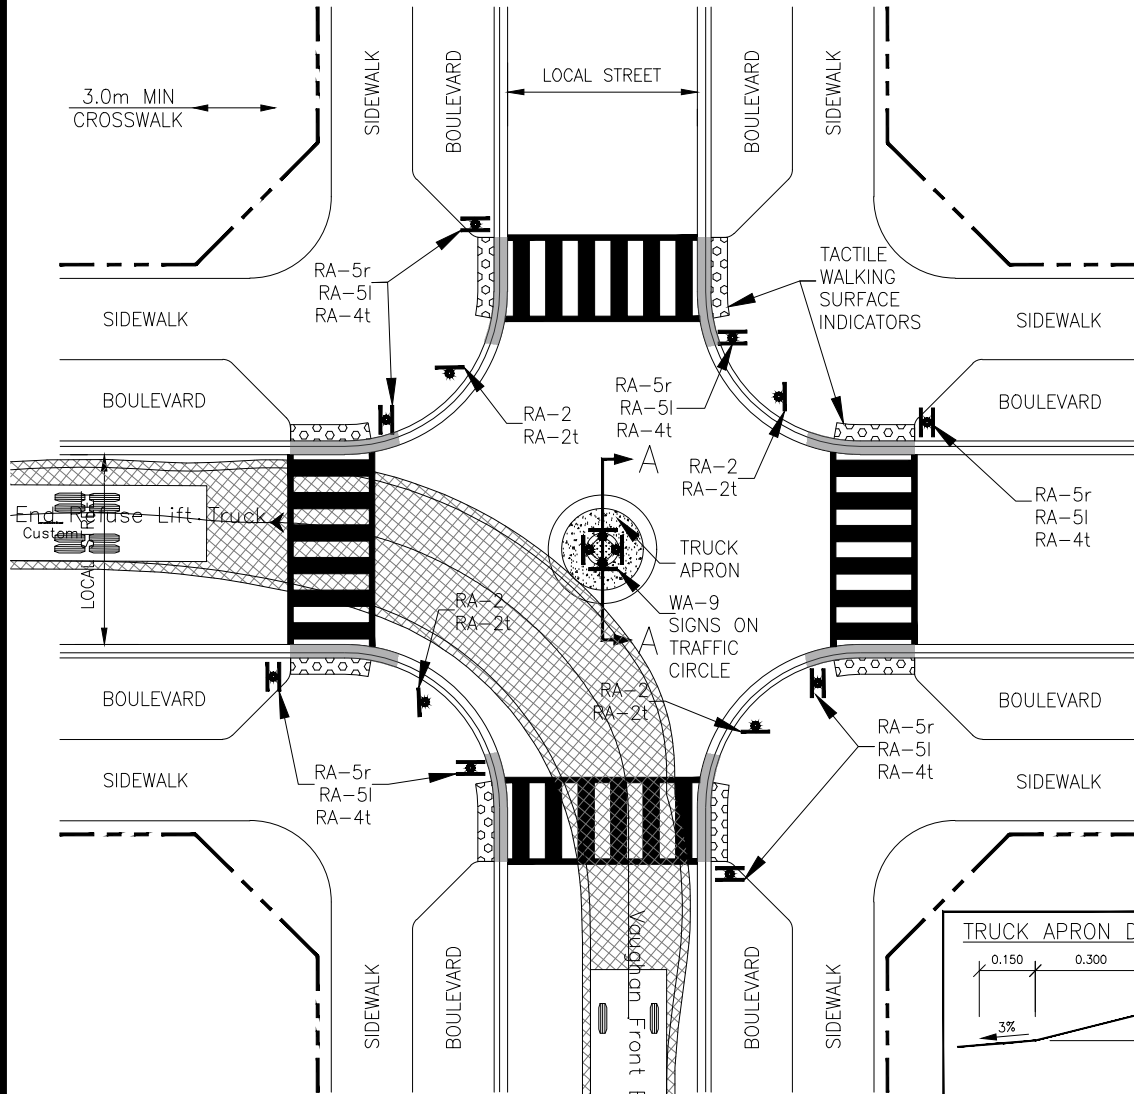

NOTES:

1. ALL DIMENSIONS ARE "TYPICAL" UNLESS OTHERWISE STATED. CURB RADII AND ROAD WIDTH TO COMPLY WITH CITY'S COMPLETE STREETS GUIDE.
2. ROUNDABOUT SIZE AND GEOMETRY SHALL BE CONFIRMED IN DETAILED DESIGN BASED ON CONNECTING ROADWAYS AND DESIGN VEHICLES.
3. ALL APPROACHES TO BE UNDER YIELD CONTROL.
4. DESIGN VEHICLE SHOULD CIRCULATE AROUND THE ISLAND WHILE CONTROL VEHICLE MAY NEED TO PASS OVER THE ISLAND.
5. ALL SIGNS TO BE HIGH INTENSITY DIAMOND GRADE & ANTI-GRAFFITI RETROREFLECTIVE SHEETING ON GALVANIZED U-CHANNEL POSTS.
6. ALL SIGN POSTS SHALL BE BREAKAWAY-TYPE IN ACCORDANCE WITH RELEVANT MTOD STANDARDS AND SPECIFICATIONS.
7. LANDSCAPING SHOULD NOT CAUSE SIGHTLINE OBSTRUCTION



4.		
3.		
2.		
1.		
REVISIONS		DATE







CITY OF VAUGHAN ENGINEERING STANDARD TRAFFIC CIRCLE (W. TURNING MOVEMENT 2)

NOT TO SCALE DESIGNED: _____ P.W.
REVISION: _____ 0 DATE: _____ JAN. 2025

STD. DWG.
R-138c

FILE: C:\Infrastructure\Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria\2020-21\City Standards\Update Folder\City Standards\Drawings_CAD_2021\S-101 - Outfall Grate.dwg

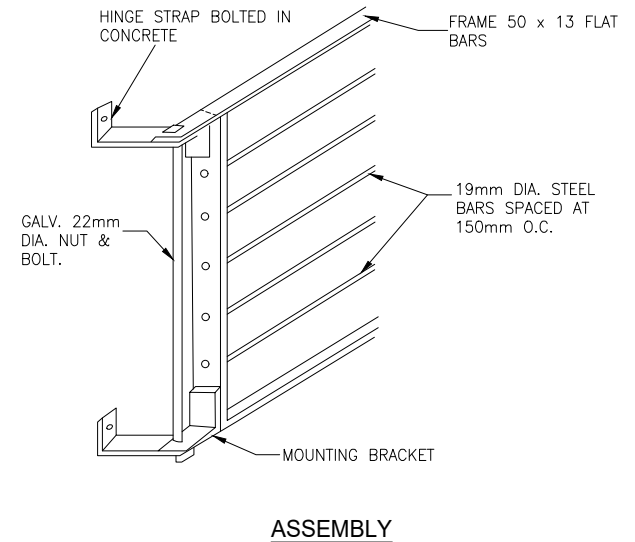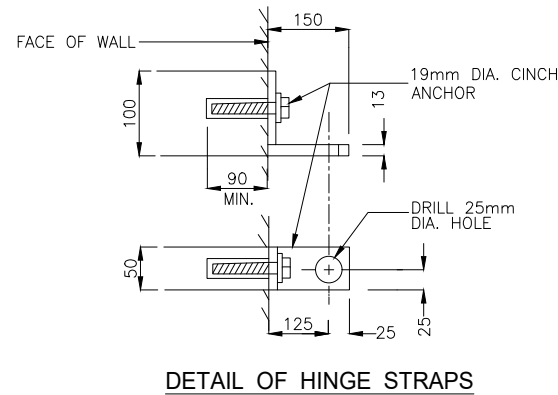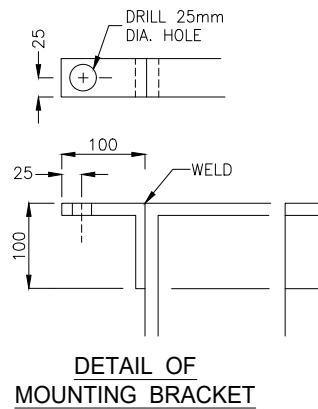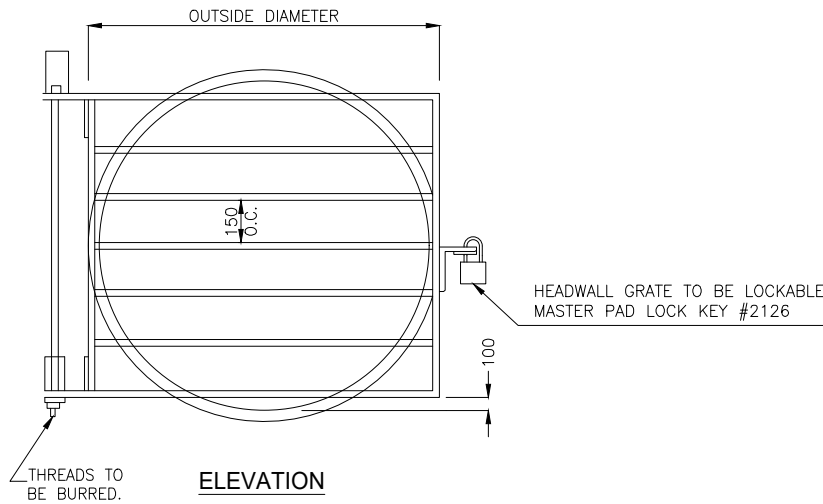


NOTES

1. FRAME, HINGE, STRAP, MOUNTING BRACKET AND STEEL RODS TO BE MEDIUM GRADE STEEL.
2. THE ENTIRE GRATE SHALL BE HOT DIPPED GALVANIZED.
3. ALL WELDS USED IN THE MANUFACTURE OF GRATES SHALL BE FULL STRENGTH WELDS.
4. ALL BOLTS, NUTS AND WASHERS SHALL BE STAINLESS STEEL.
5. OUTFALL LARGER THAN 900mmØ SHALL BE DESIGNED SITE SPECIFICALLY AND APPROVED BY THE CITY.


mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
OUTFALL GRATE MAX. 900mmØ		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	S - 101


FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards Drawings CAD_2021\S-102 - Inlet Grate.dwg

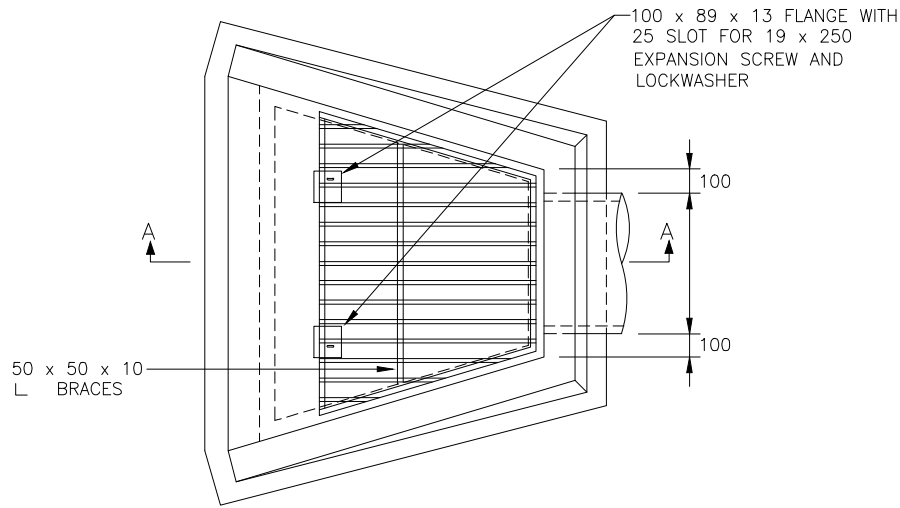

PLAN

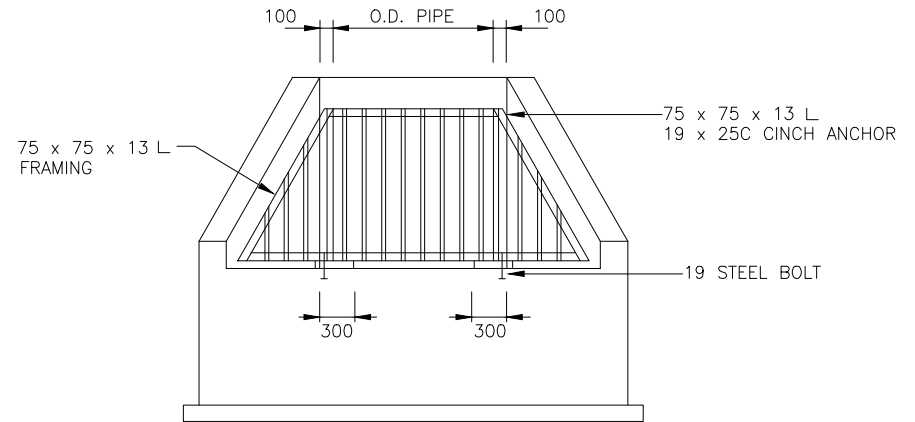

ELEVATION

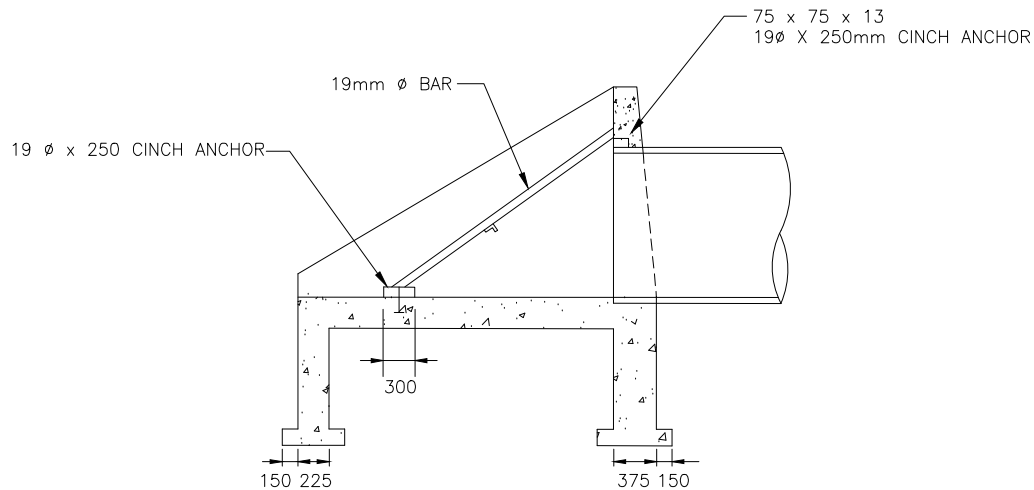



SECTION A-A

NOTES

1. ALL STEEL USED SHALL BE MEDIUM GRADE.
2. THE ENTIRE GRATE SHALL BE HOT DIPPED GALVANIZED.
3. ALL BOLTS, NUTS AND WASHERS SHALL BE STAINLESS STEEL.
4. ALL WELDS USED IN THE MANUFACTURE OF THE GRADES SHALL BE CONTINUOUS FILET WELD 6mm THROAT WIDTH.
5. GRATING TO BE SPECIFICALLY DESIGNED FOR PIPES 1.0m DIA. OR LARGER.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
INLET GRATE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	S - 102

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

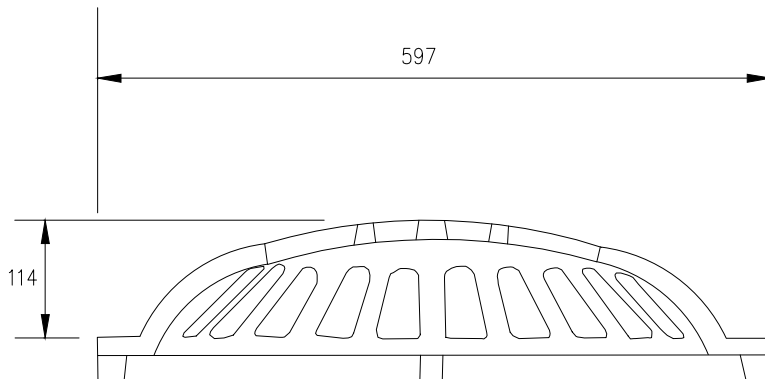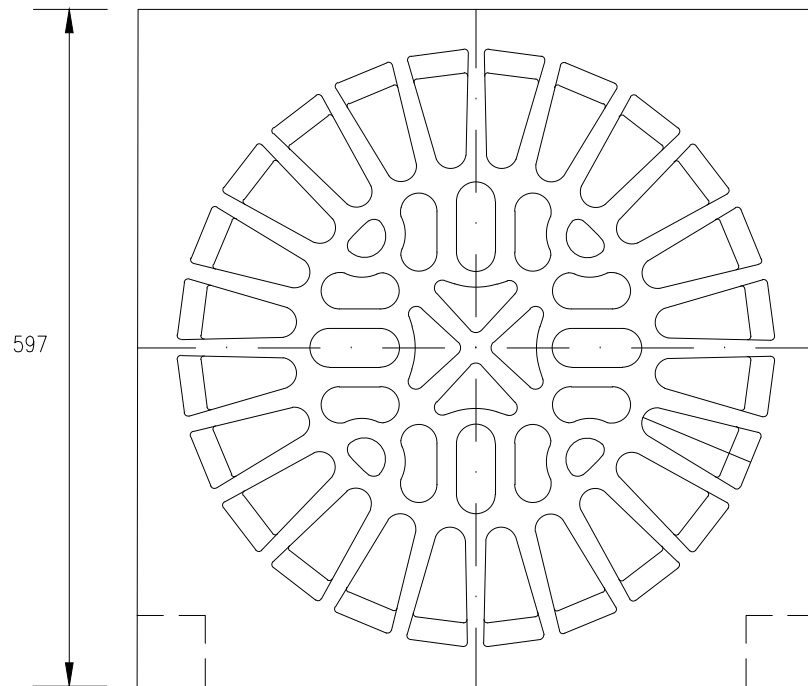

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

REAR YARD CATCHBASIN GRATE

NOT TO SCALE


DESIGNED: _____

REVISION: _____


DATE: DEC. 2020

STD. DWG.



S - 103

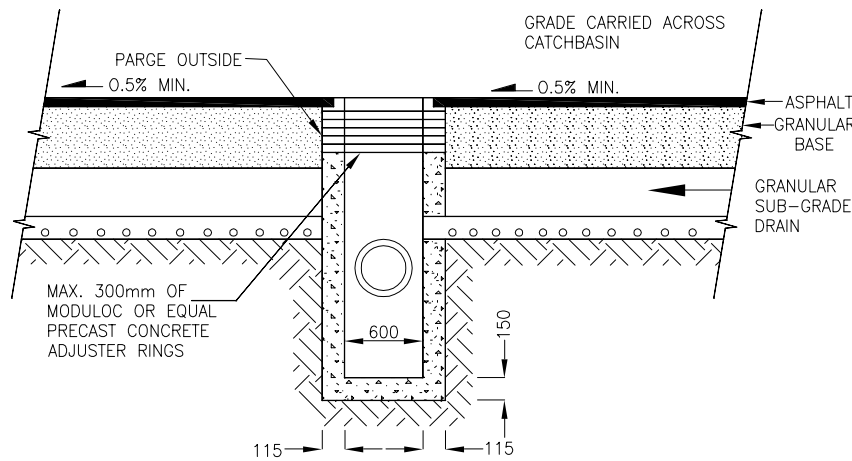

SINGLE CATCHBASIN

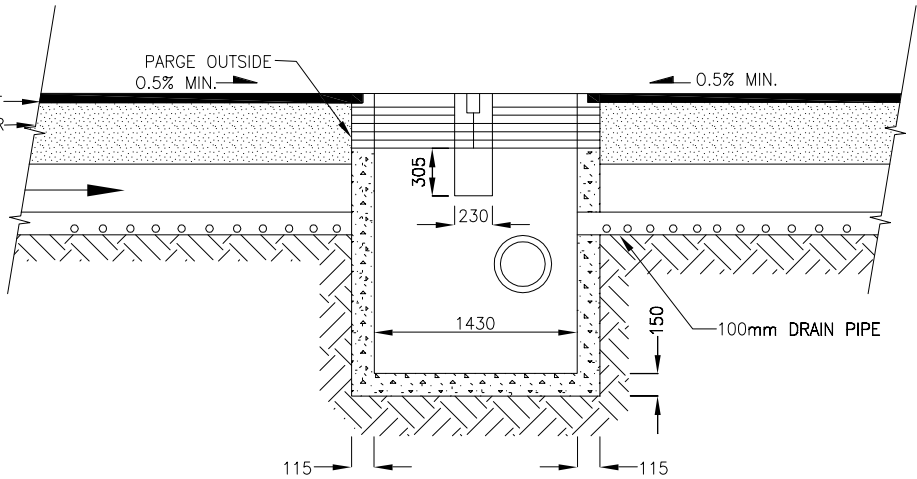

DOUBLE CATCHBASIN

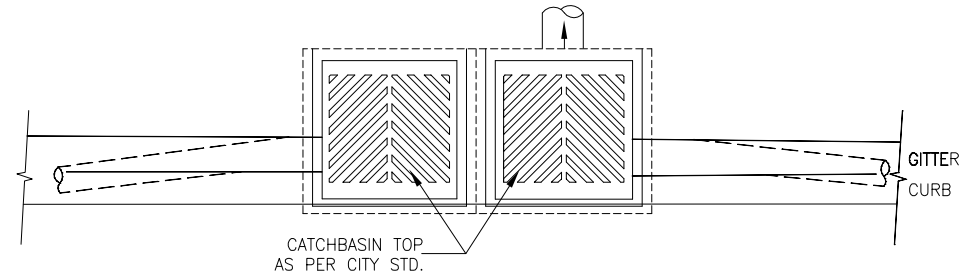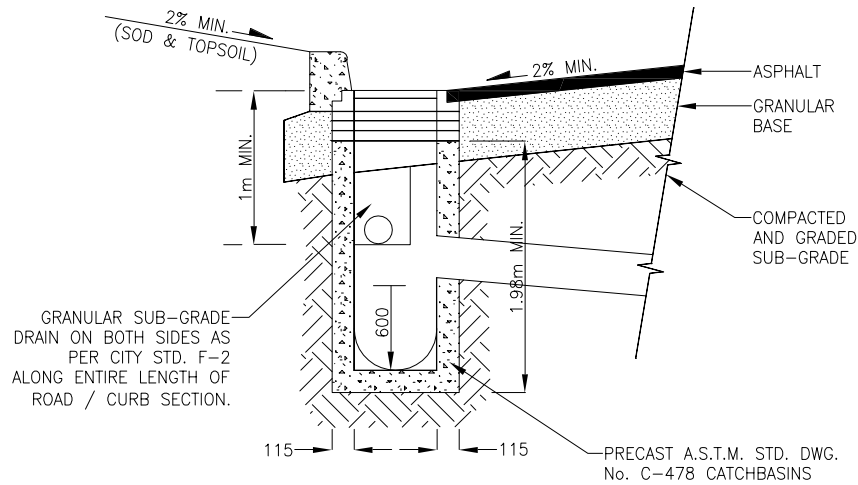


NOTES


1. ALL WEEP HOLES AND LIFT HOLES TO BE PLUGGED AND MORTARED.
2. ALL GRANULAR BACKFILL TO BE PLACED TO 300mm MINIMUM THICKNESS ON ALL SIDES.
3. ALL GRANULAR BACKFILL TO BE COMPACTED TO 95% S.P.D.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED


4.		
3.		
2.		
1.		
REVISIONS		DATE
Vaughan The City Above Toronto ENGINEERING DEPARTMENT		
CITY OF VAUGHAN ENGINEERING STANDARD		
CATCHBASINS		
NOT TO SCALE	DESIGNED: <u>ENG. DEPT.</u>	STD. DWG.
REVISION: _____	DATE: <u>MARCH 2004</u>	K - 4

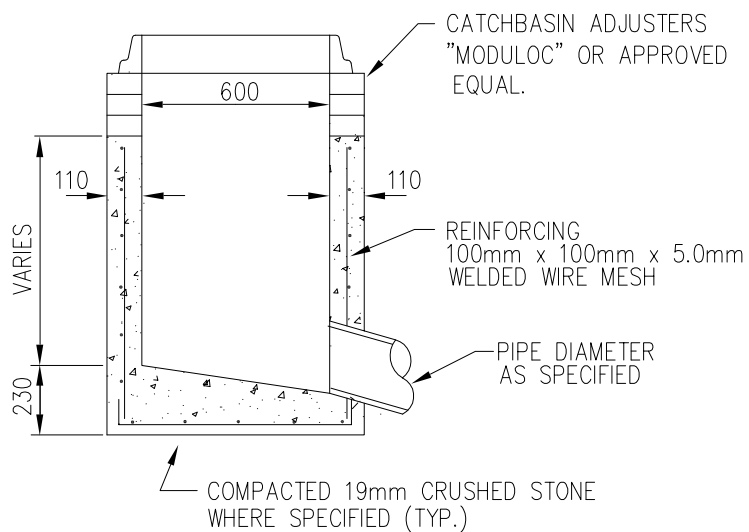

SECTION A-A

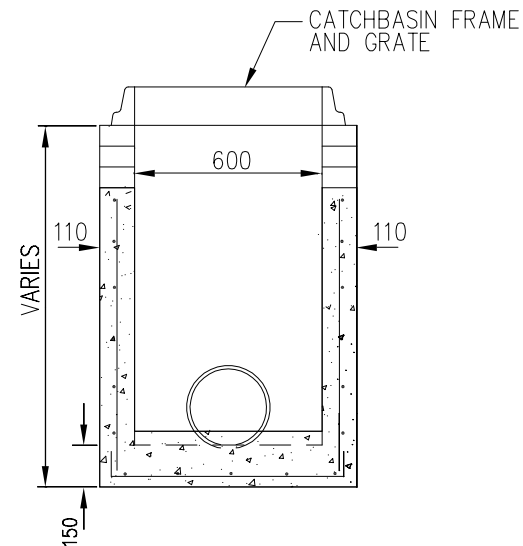

SECTION B-B

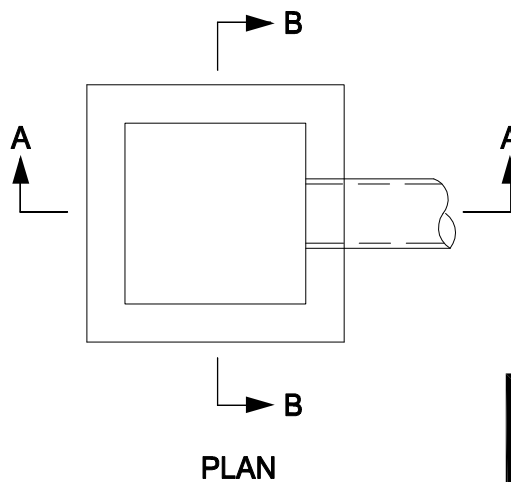


PLAN

NOTES

1. CATCHBASIN ADJUSTERS TO BE INSTALLED AS PER MANUFACTURERS RECOMMENDATIONS. MINIMUM UNIT THICKNESS TO BE 50mm.
2. ALL JOINTS AND LIFTING HOLES TO BE COMPLETELY FILLED WITH A 1:3 MORTAR MIX AND POINTED BEFORE BACKFILLING.
3. REAR YARD CATCHBASINS TO BE OF THIS TYPE.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
 ENGINEERING DEPARTMENT CITY OF VAUGHAN ENGINEERING STANDARD PRECAST CATCHBASIN WITHOUT SUMP		
NOT TO SCALE		DESIGNED: <u>ENG. DEPT.</u>
REVISION: _____		DATE: <u>MARCH 2004</u>
		STD. DWG. K - 5

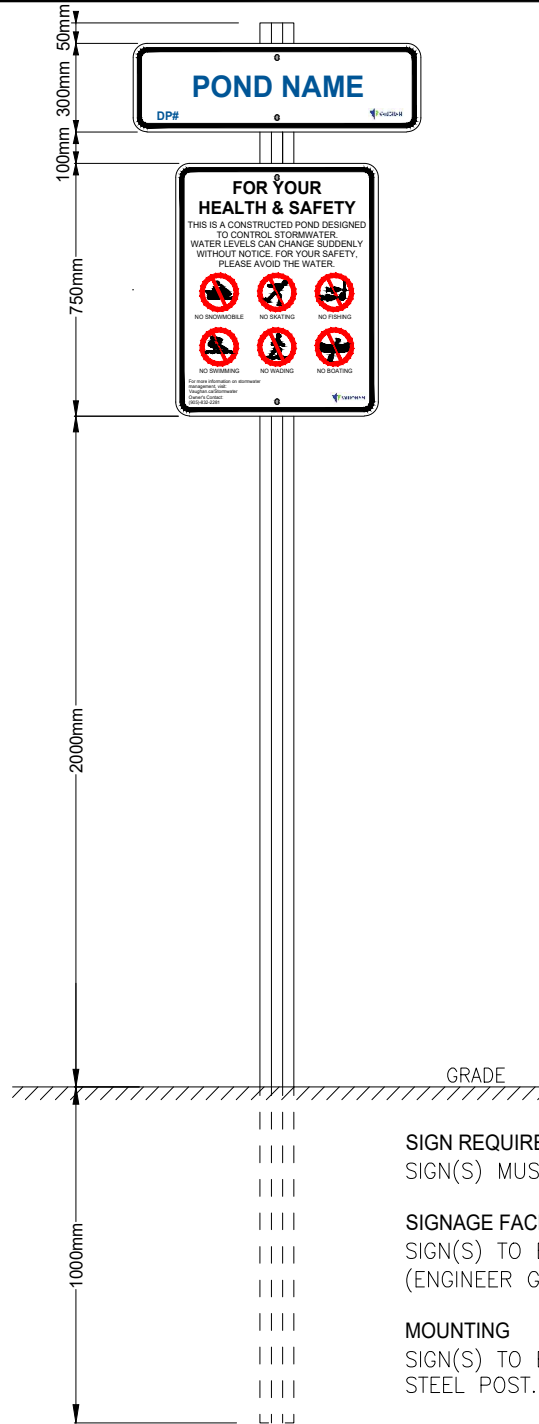

SIGN REQUIREMENTS


SIGN(S) MUST BE PLACED AT ALL POND ENTRANCES.

SIGNAGE FACE


SIGN(S) TO BE MANUFACTURED USING REFLECTIVE FINISH (ENGINEER GRADE), WITH TOP AND BOTTOM MOUNT HOLES.

MOUNTING

SIGN(S) TO BE MOUNTED TO 3.8m U-CHANNEL GALVANIZED STEEL POST.

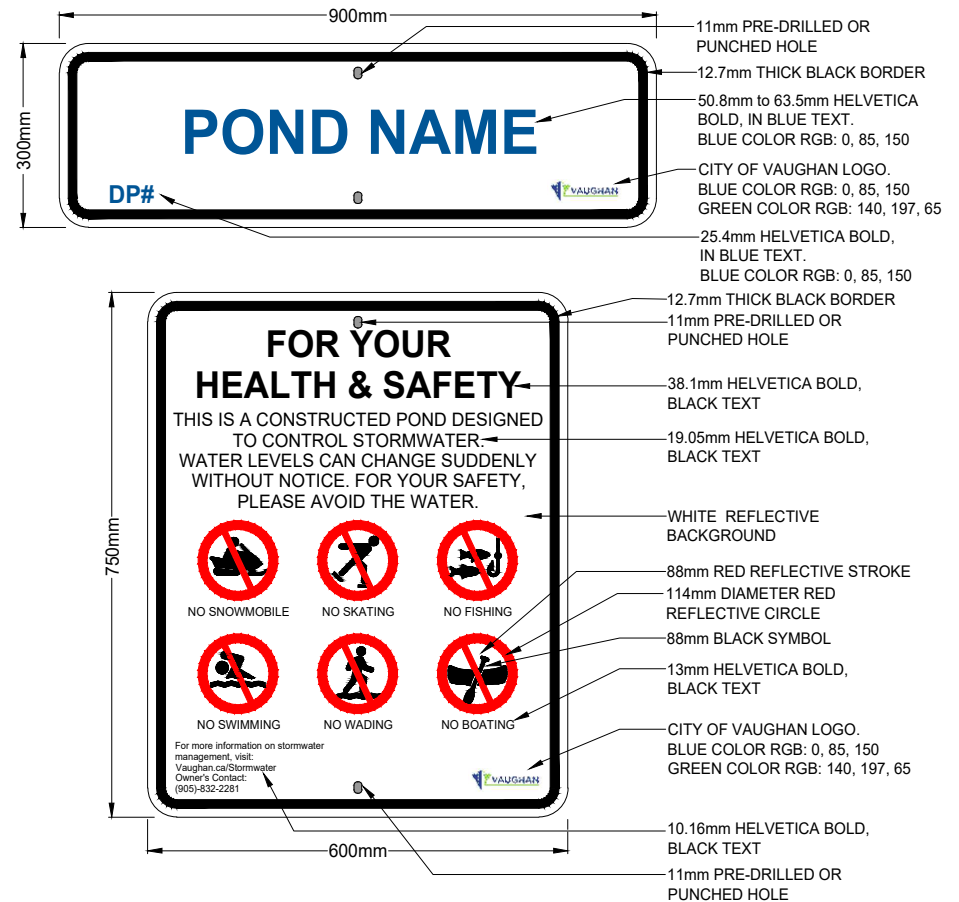


4.		
3.		
2.		
1.	REVISED/UPDATED SIGN STANDARD	07/24
	REVISIONS	DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
STORM WATER FACILITY POND WARNING SIGN		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: 1	DATE: DEC. 2020	S-106

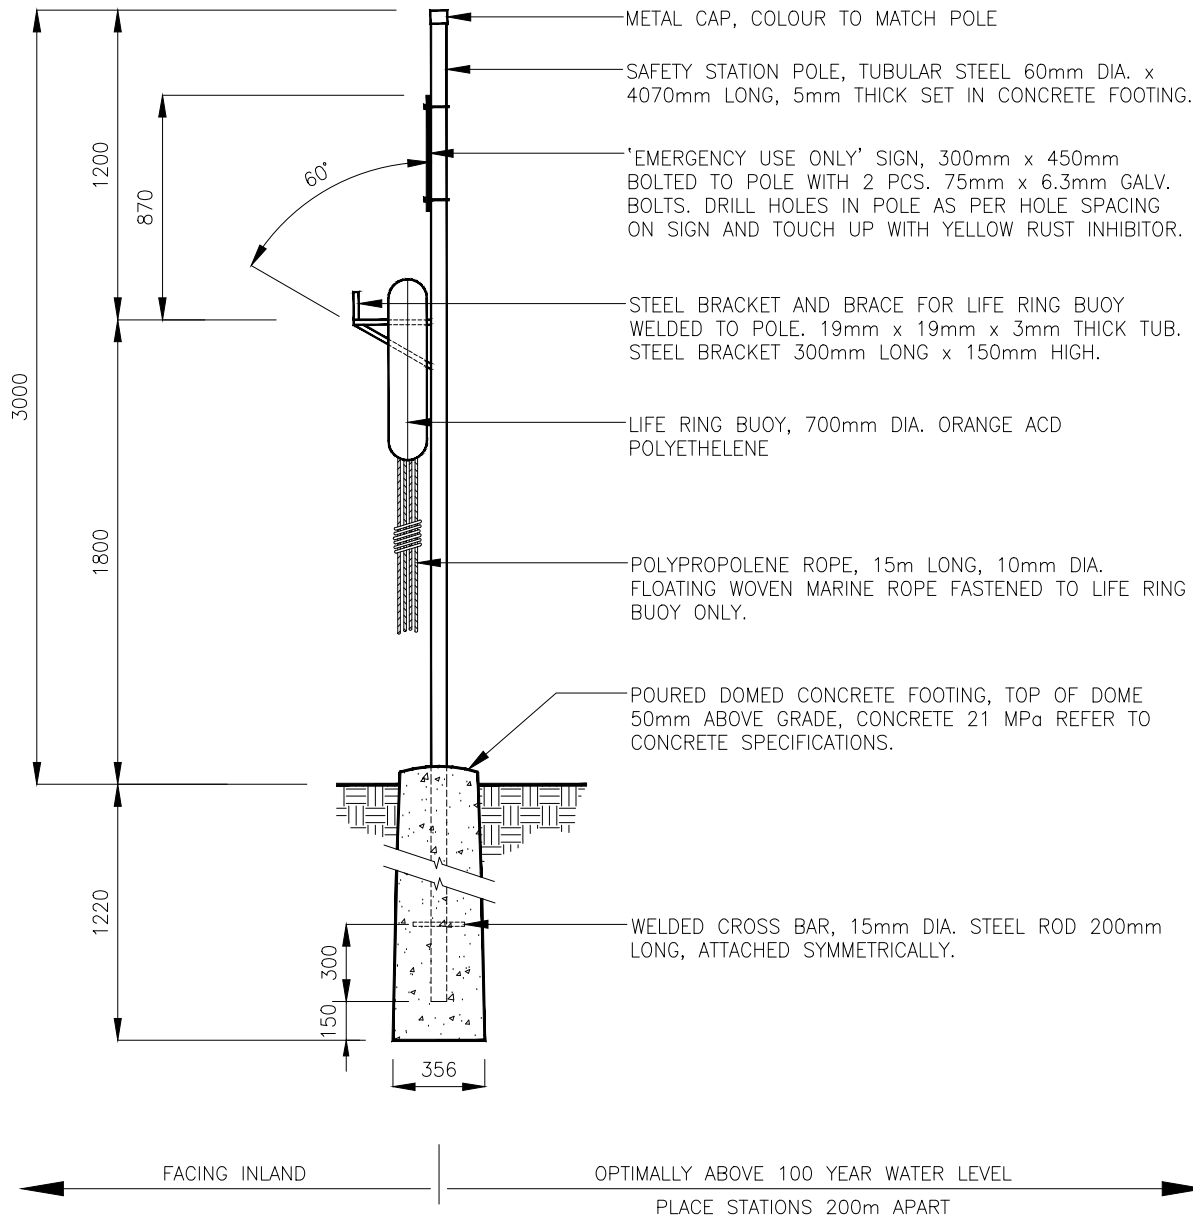

NOTES

1. FINISH OF POST AND ALL OTHER STEEL COMPONENTS AND FITTINGS TO BE SAFETY YELLOW GLOSS ENAMEL POWDER COAT APPLICATION. PRIOR TO POWDER COATING, ALL SURFACES TO BE CHEMICALLY CLEANED AND TREATED WITH PARKER BONDERITE AND CHLOROTHENE SOLVENT OR APPROVED EQUAL. POWDER COATING MUST BE A POLYESTER 2000 SERIES APPLIED IN A THICKNESS OF 4-5 MILS BY ELECTROSTATIC COAT AND OVEN CURED TO A SMOOTH AND EVEN SURFACE.
2. NO PLASTIC COMPONENTS ARE TO BE USED EXCEPT WHERE NOTED.

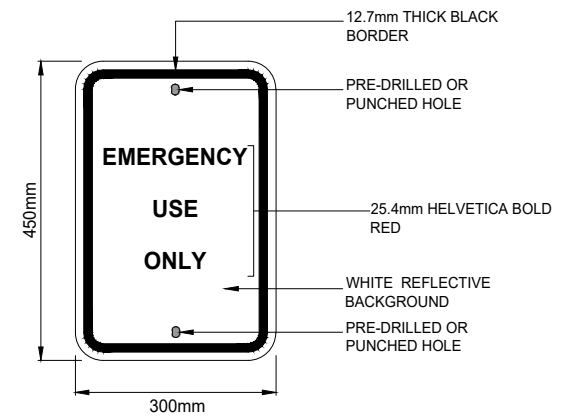


mm DIMENSIONS IN MILLIMETRES EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
SAFETY STATION		
FOR PONDS AND WATERWAYS		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	S - 107


S-108 - SIDE INLET CATCHBASIN DETAILS

CURRENTLY UNDER DEVELOPMENT


Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

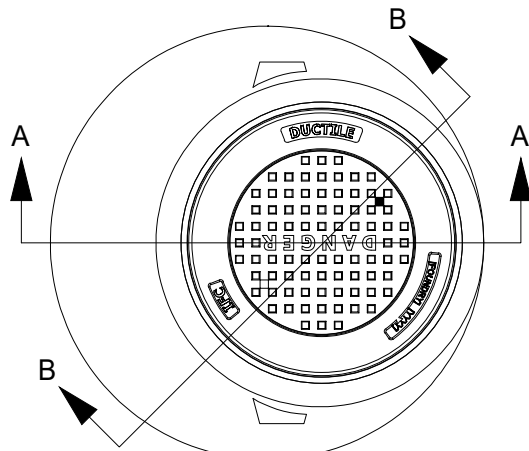

TOP VIEW



CONCRETE ADJUSTMENT UNIT

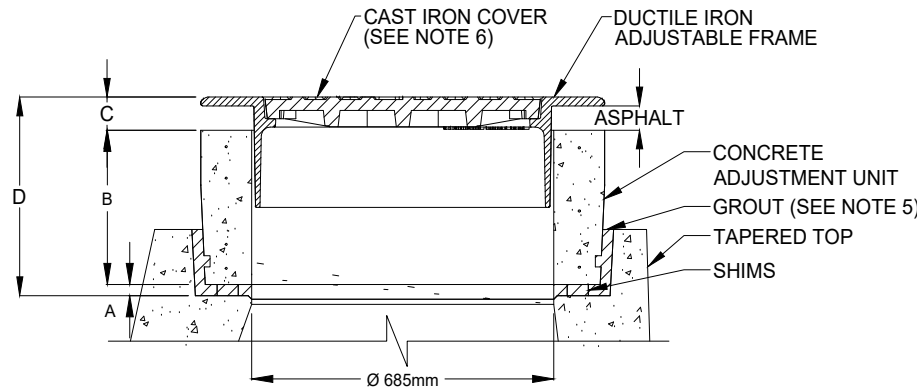


SECTION B-B

DIMENSION	NOTES
A	ADJUSTMENT RANGE: 25mm - 100mm
B	STANDARD HEIGHT, CONCRETE ADJUSTMENT UNIT: 350mm. ALSO AVAILABLE: 100, 150, 200, 250, 300, 400, 450, 500, 550mm
C	DUCTILE IRON FRAME ADJUSTMENT RANGE: 70 - 200 mm.
D	OVERALL ADJUSTMENT: MIN 195 mm (USING 100mm C.A.U.) AND MAX 850 mm (USING 550mm C.A.U.)

NOTES:

1. MINIMUM CONCRETE STRENGTH AT 28 DAYS: 30 MPa.
2. REINFORCEMENT: AS PER CSA A257.4 - 09.
3. 25 mm MINIMUM COVER ON ALL REINFORCING STEEL.
4. CONCRETE ADJUSTMENT UNIT CAN BE ORIENTED TO SUIT HEIGHT AND ANGLE REQUIRED. UNIT DEPICTED IS 350mm.
5. GROUT REQUIREMENTS: NON-SHRINK; MINIMUM 50 MPa At 28 DAYS; TO BE INSTALLED ONLY AS PER MANUFACTURER APPLICATION GUIDELINES.
6. COVER DEPICTED IS PER OPSD 401.01, TYPE A. OTHER OPS-COMPLIANT COVERS AVAILABLE.

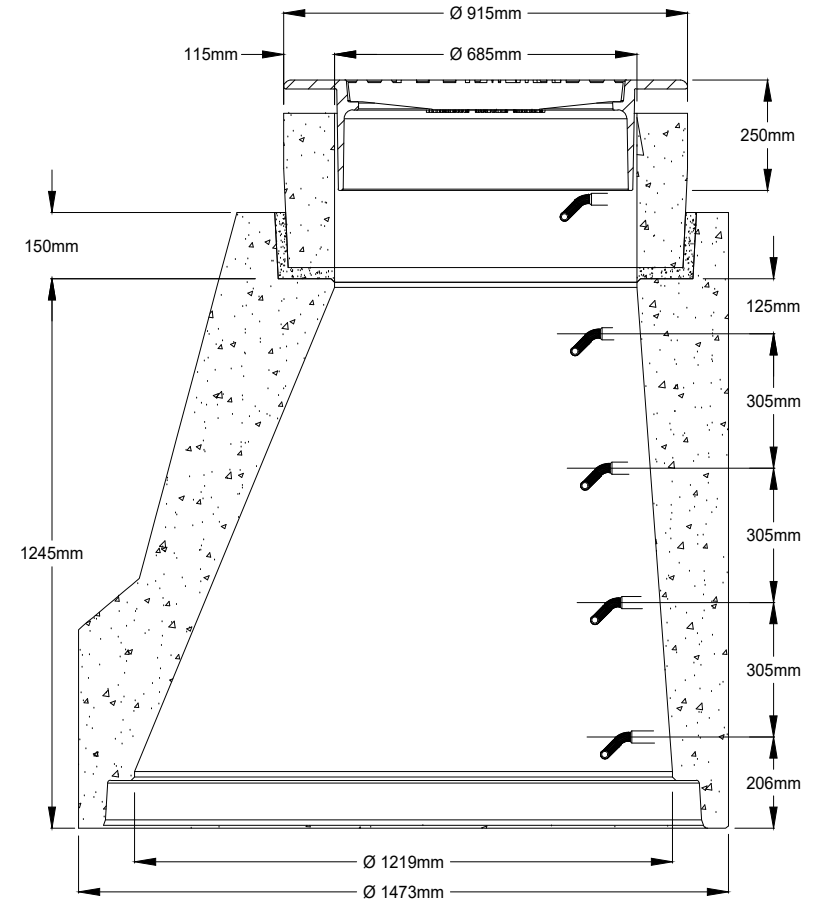

SECTION A-A

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

IFC MAINTENANCE HOLE
TAPERED TOP ASSEMBLY



NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JUN. 2023

STD. DWG.

S - 109

Acad File: C:\Users\vaughan\City of Vaughan\City Standards - General\Design Criteria 2025\Draw - Standards\LA-110 - Pathway (Typ.) Above a Non-conventional SWMF 1 - Rev.dwg

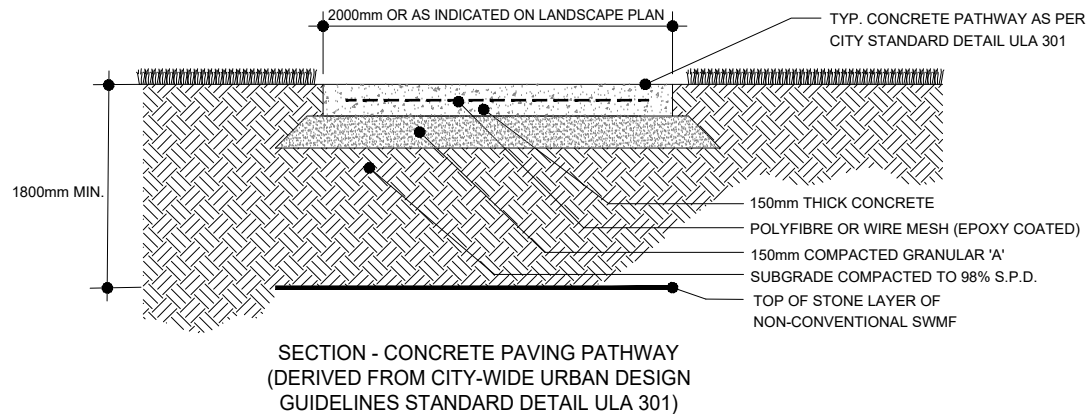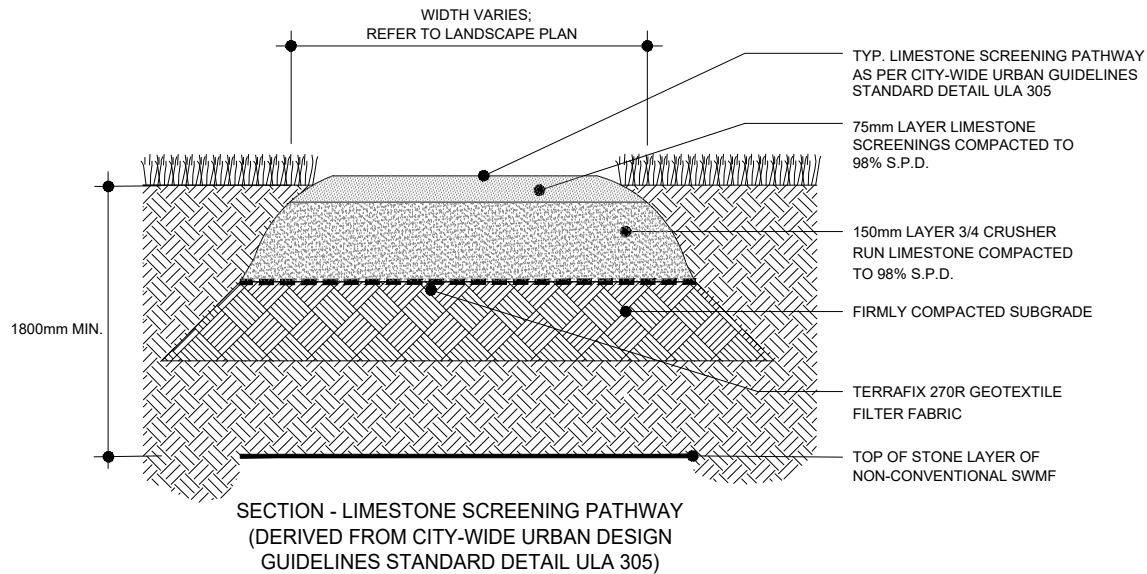

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO PATHWAYS ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 301 AND 305 FOR PAVING DETAILS

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

PATHWAY (TYP.)
ABOVE A NON-CONVENTIONAL SWMF


NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025


STD. DWG.

S - 110

Acad File: C:\Users\vaughan\OneDrive\Documents\CITY OF VAUGHAN\City Standards - General\Design Criteria 2020\Draw - Standards\LDPS-111 - Pathway (Typ.) - Above a Non-conventional SWMF - 11 - Rev.dwg

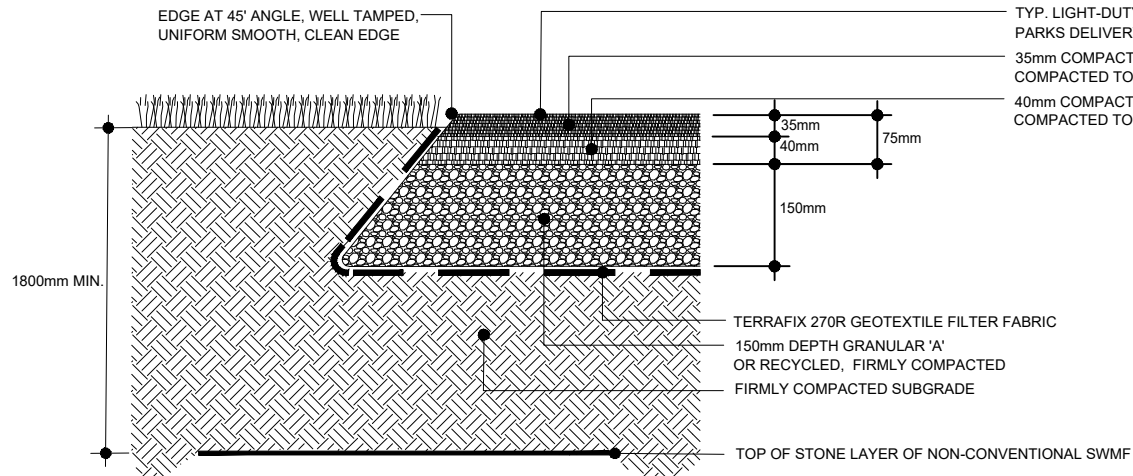

SECTION - LIGHT-DUTY ASPHALT PAVING
(DERIVED FROM PARKS DELIVERY STANDARD DETAIL MLA 208)

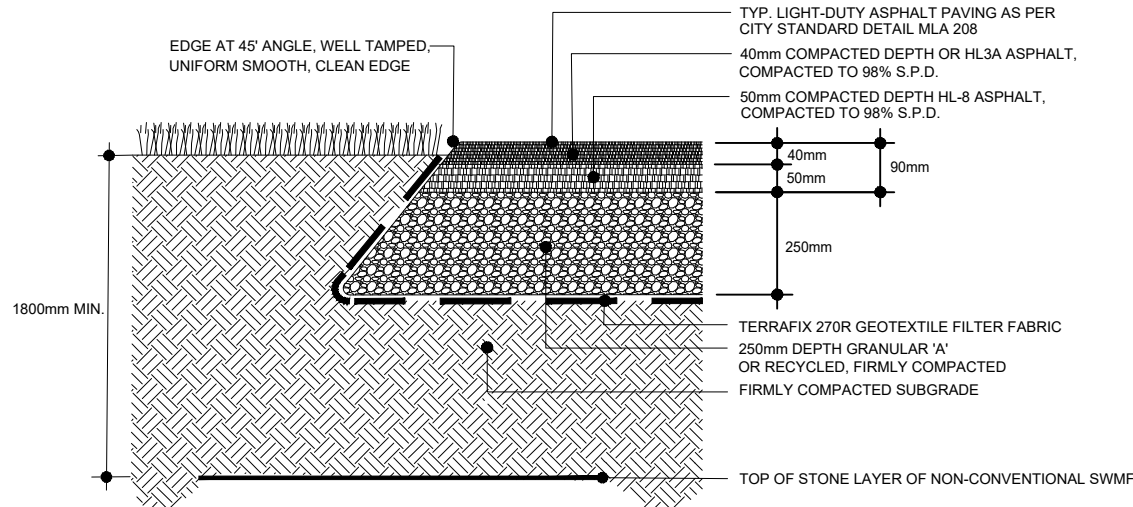

SECTION - HEAVY-DUTY ASPHALT PAVING
(DERIVED FROM PARKS DELIVERY STANDARD DETAIL MLA 209)

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO PATHWAYS ABOVE NON-CONVENTIONAL SWMF LOCATED WITHIN PARK. REFER TO PARKS DELIVERY STANDARD DETAILS MLA 208 AND 209 FOR PAVING DETAILS.

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

ASPHALT PATHWAYS (TYP.)
ABOVE A NON-CONVENTIONAL SWMF
LOCATED WITHIN PARK

NOT TO SCALE


DESIGNED: _____

STD. DWG.

REVISION: _____

DATE: JAN. 2025

S - 111

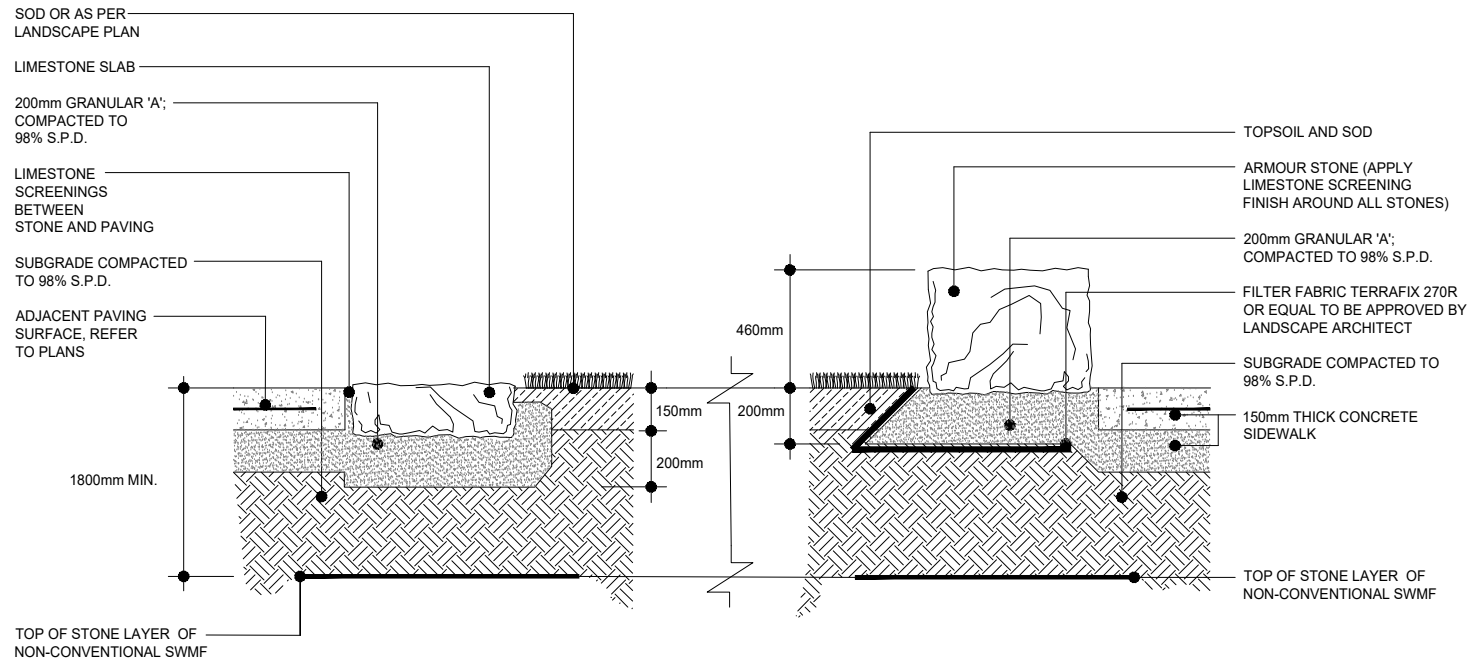

**SECTION - STEPPING STONE
ADJACENT WALKWAY**
(DERIVED FROM CITY-WIDE URBAN DESIGN
GUIDELINES STANDARD DETAIL ULA 311)

**SECTION - ARMOUR STONE WITH
P-I-P CONCRETE SIDEWALK**
(DERIVED FROM CITY-WIDE URBAN DESIGN
GUIDELINES STANDARD DETAIL ULA 309)

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

**ARMOUR STONE (TYP.) DETAIL
ABOVE A NON-CONVENTIONAL SWMF**

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025


STD. DWG.

S - 112

NOTES:

1. ALL STONES TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
2. ALL QUARRY STONE TO HAVE SPLIT OR NATURALLY WEATHERED FACES; NO EXPOSED DRILL MARKINGS.
3. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.

Acad File: C:\Users\vaughan\OneDrive\Documents\City of Vaughan\City Standards - General\Design Criteria 2025\Draw - Standards\LA05-113 - Bike Rack Detail (Typ.) Above a Non-conventional SWMF - New.dwg

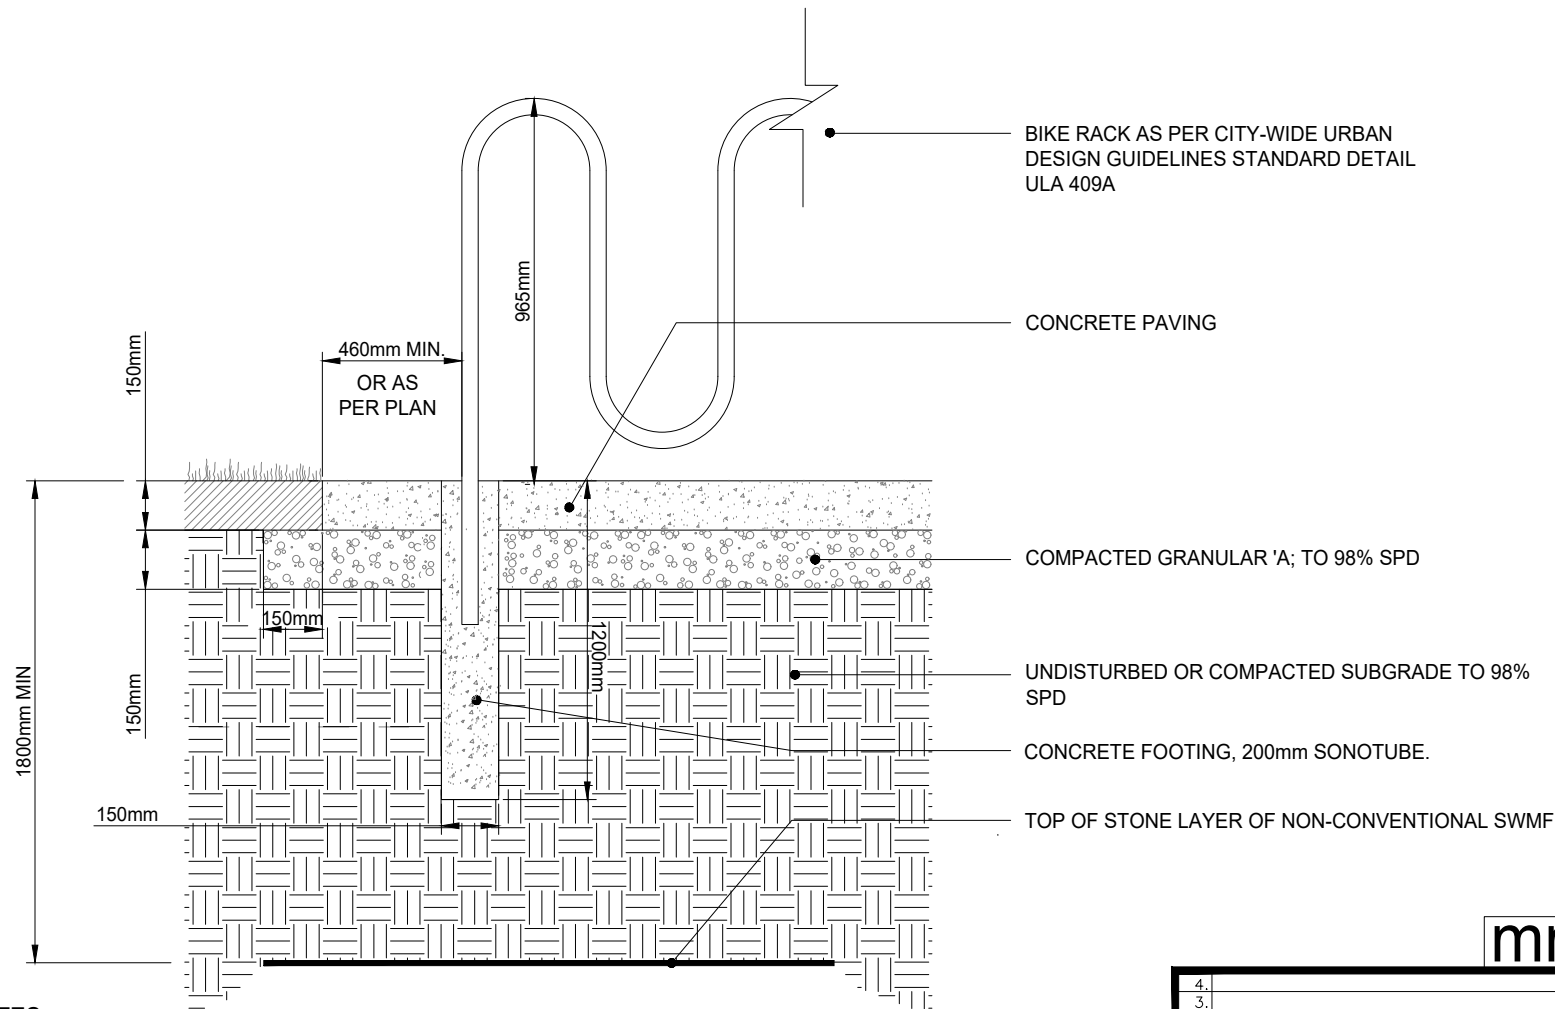

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. REFER TO LAYOUT PLAN FOR PLACEMENT/LOCATION OF BIKE RACK.
3. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
4. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO BIKE RACKS ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 409A FOR BIKE RACK DETAILS.

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

BIKE RACK DETAIL (TYP.) ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE


DESIGNED: _____

REVISION: _____

DATE: JAN. 2025

STD. DWG.

S - 113

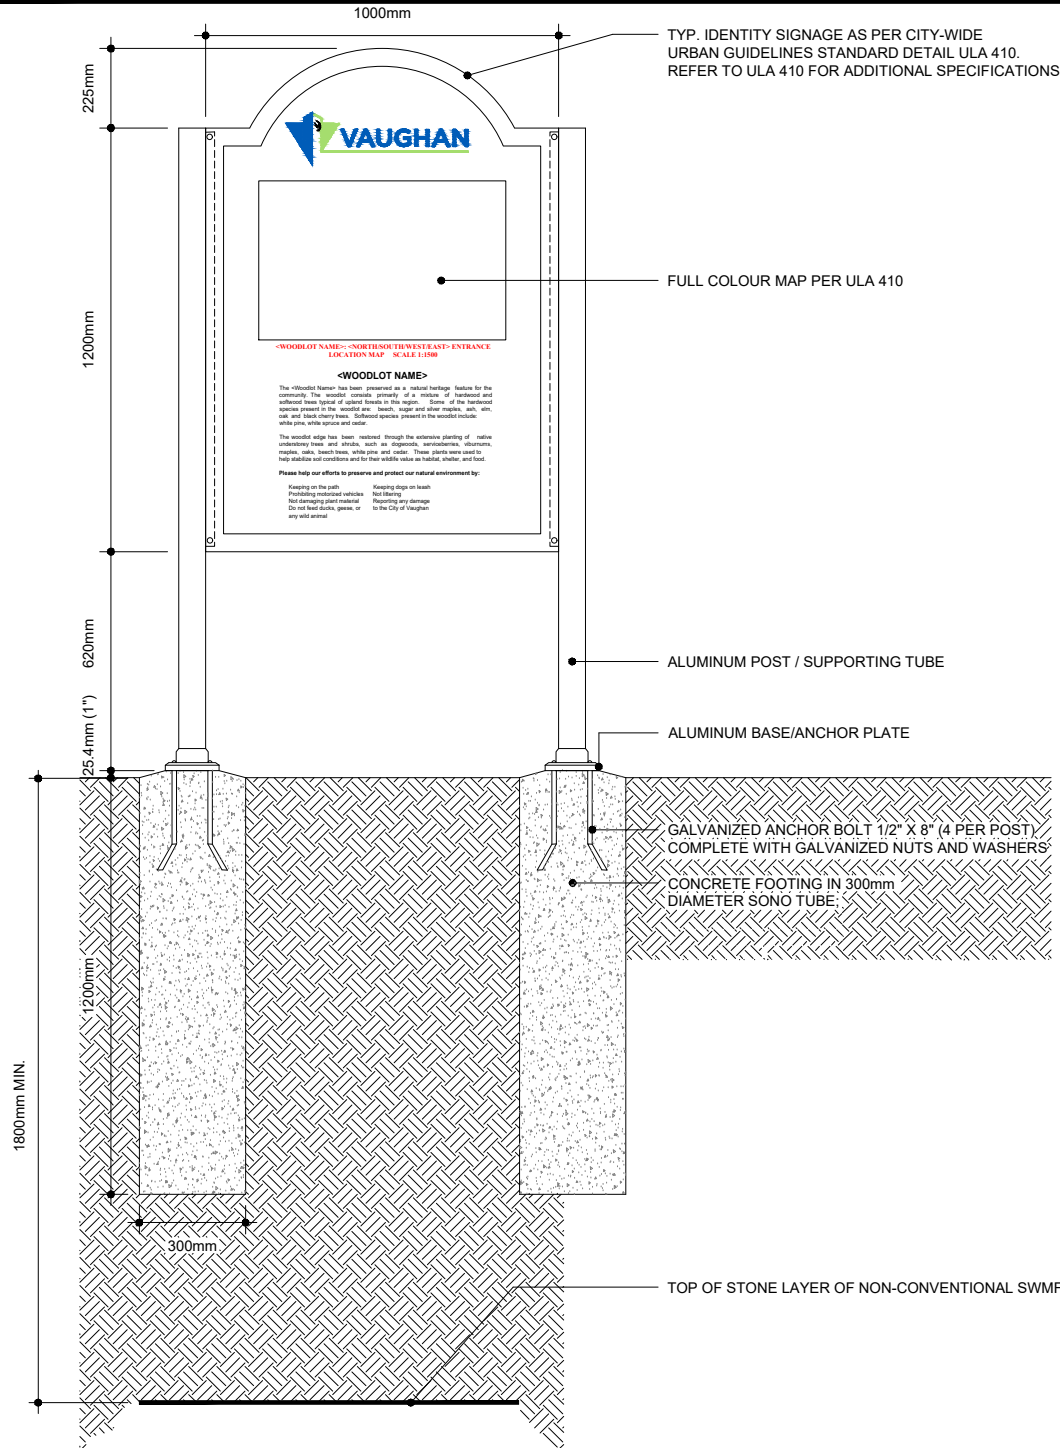

NOTES:

1. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO IDENTIFY SIGNAGE ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 410 FOR FURTHER DETAIL.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PALN OF SUBDIVISION, AS APPLICABLE.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

IDENTITY SIGNAGE (TYP.)
ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE

DESIGNED: _____

STD. DWG.


REVISION: _____

DATE: JAN. 2025

S - 114

Acad File: C:\Users\vaughan\OneDrive\City of Vaughan\City Standards - General\Design Criteria 2020\Std - Gate (Typ) Above a Non-conventional SWMF - Rev.dwg

REFER TO CITY-WIDE URBAN DESIGN
GUIDELINES STANDARD DETAIL ULA 412
AND 413 FOR DETAILS ON GATES

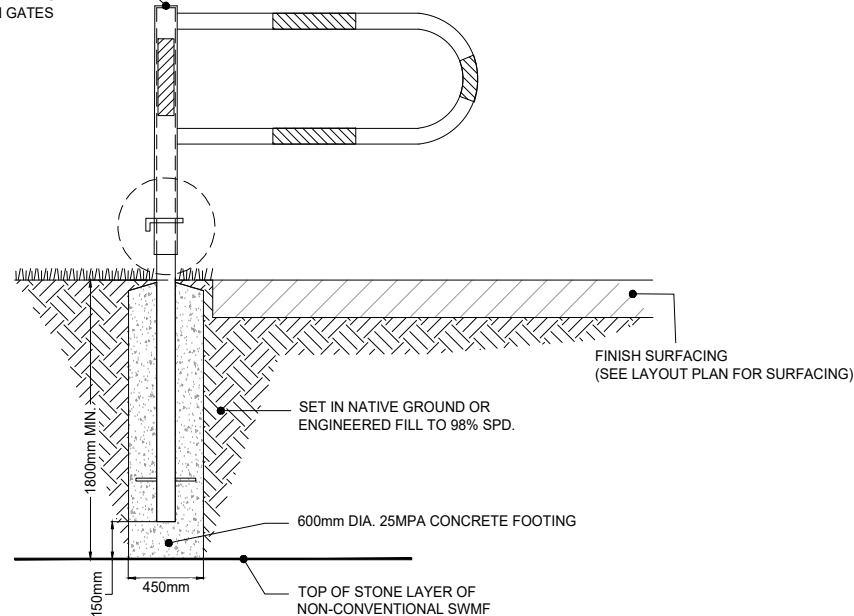

NOTES:

1. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO GATES ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 412 AND 413 FOR GATE DETAILS
4. LOCATION TO BE FIELD STAKED AND APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. PROTECT EXISTING PATHWAYS AND WALKWAYS FROM DAMAGE. CONTRACTOR RESPONSIBLE TO RESTORE ALL DAMAGES AT NO ADDITIONAL COST TO THE CITY.

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

GATE (TYP.)
ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE

DESIGNED: _____


REVISION: _____

DATE: _____ JAN. 2025 _____

STD. DWG.

S - 115

Acad File: C:\Users\vaughan\City of Vaughan\City Standards - General\Design Criteria 2020\Draw - Standards\LA05-116 - Bollard (Typ.) Above a Non-conventional SWMF - Rev.dwg

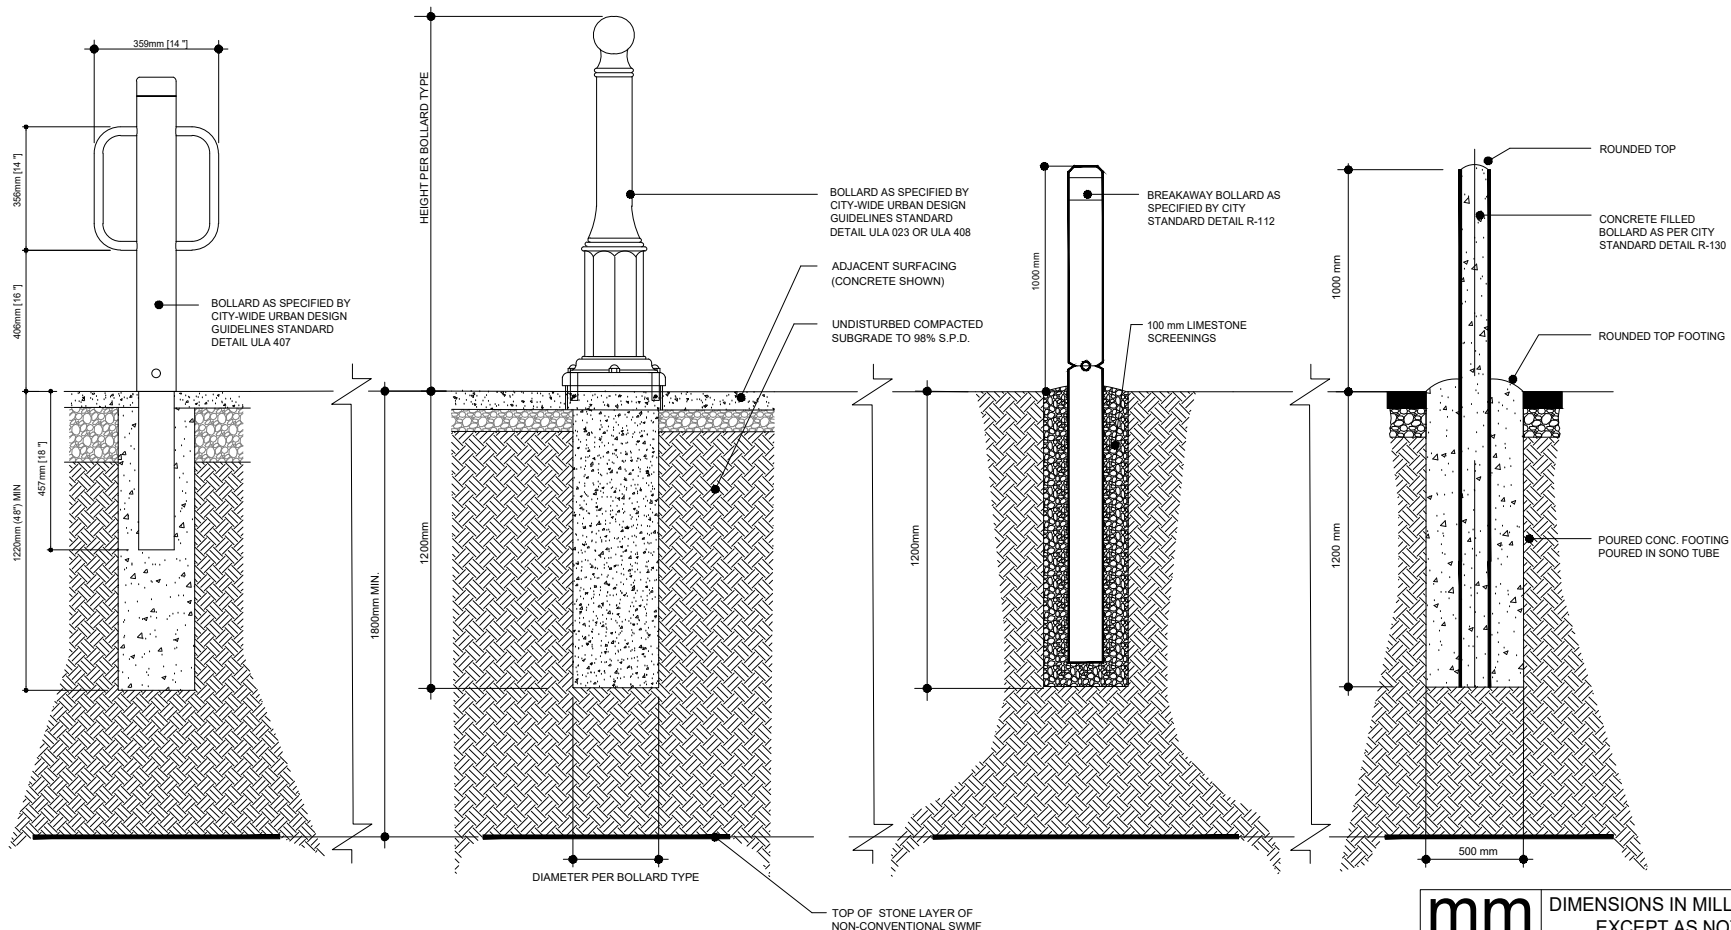

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO BOLLARDS ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAILS ULA-023, 407 AND 408 FOR BOLLARD DETAILS. REFER TO CITY STANDARD DETAIL R-112 FOR BREAKAWAY BOLLARD DETAILS. REFER TO CITY STANDARD DETAIL R-130 FOR CONCRETE BOLLARD DETAILS.

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

BOLLARD (TYP.) ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: JAN. 2025

STD. DWG.
S - 116

Acad File: C:\Users\vaughan\OneDrive\Documents\City of Vaughan\City Standards - General\Design Criteria\2025\Draw - Standards\LA05-117 - Tree Planting (Typ.) Above a Non-conventional SWMF - Rev.dwg

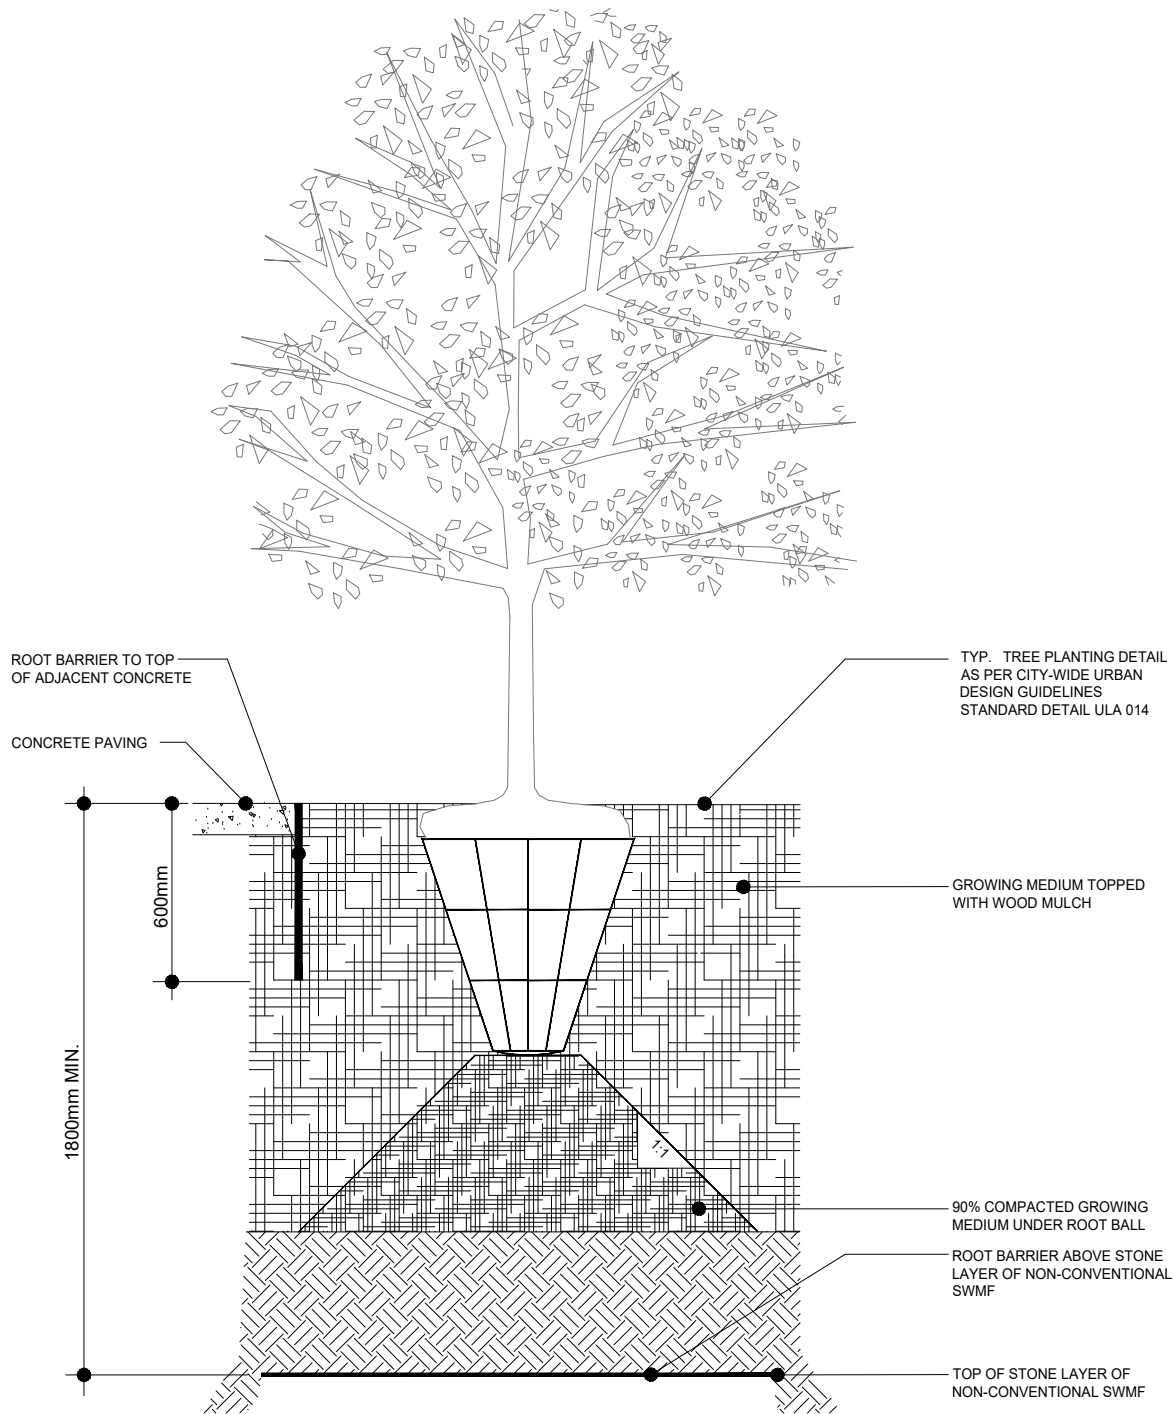

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DEIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO TREE PLANTING ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES VOLUME 2 ULA 014 FOR TREE PLANTING DETAILS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

TREE PLANTING (TYP.) ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE

DESIGNED: _____


REVISION: _____

DATE: JAN. 2025

STD. DWG.

S - 117

TYPICAL SHRUB PLANTING DETAIL AS PER CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 015

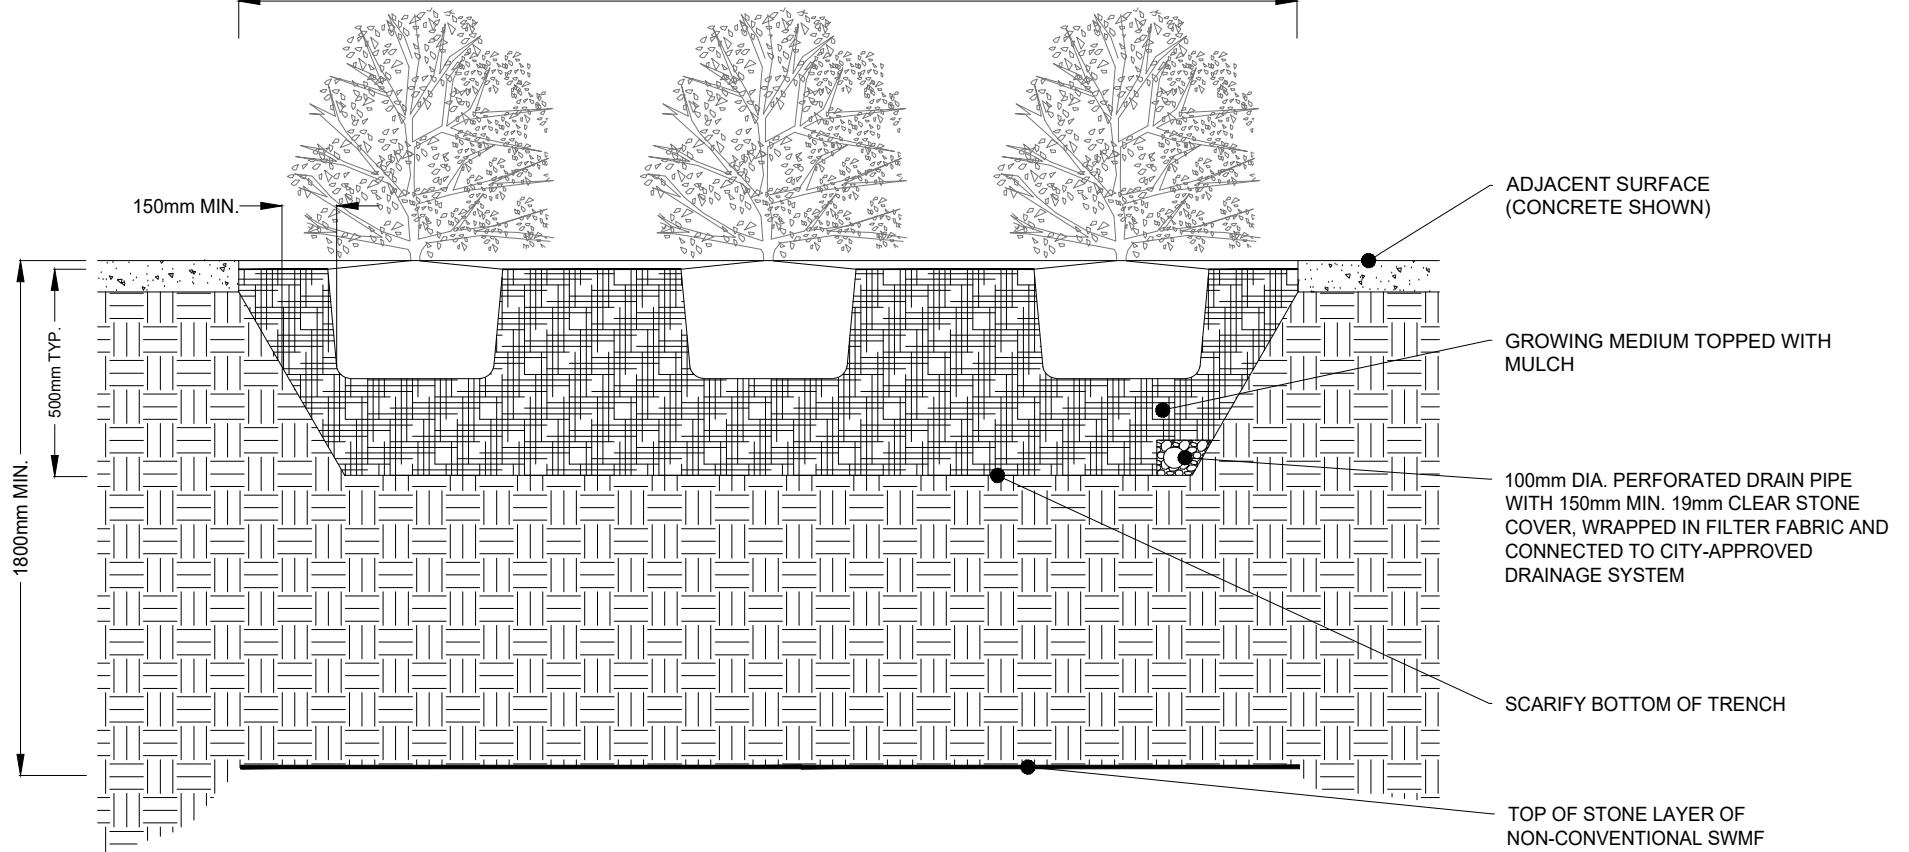

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO SHRUB PLANTING ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 015 FOR SHRUB PLANTING DETAILS.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD


SHRUB PLANTING (TYP.)
ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025

STD. DWG.

S - 118

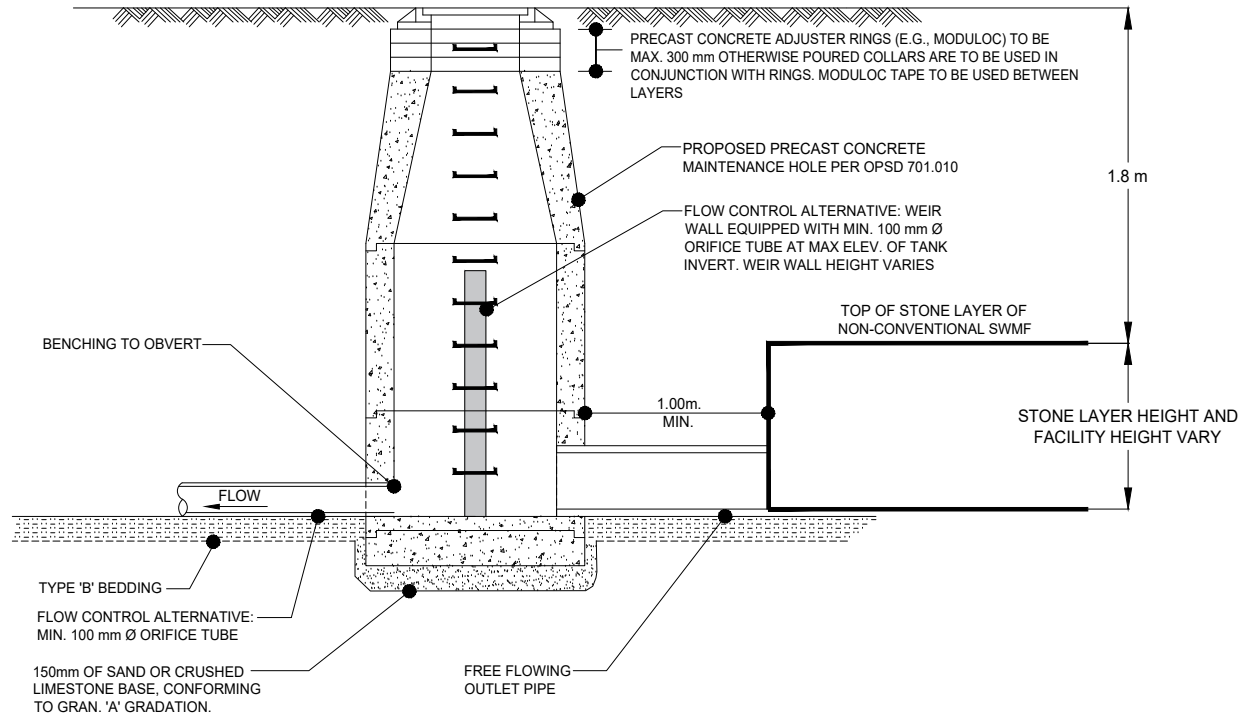

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

EXAMPLE STORM CONNECTION DOWNSTREAM
FROM A NON-CONVENTIONAL SWMF

NOT TO SCALE DESIGNED: _____


REVISION: _____ DATE: JAN. 2025

STD. DWG.


S - 119

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO THE NON-CONVENTIONAL SWMF, DOWNSTREAM MANHOLE CONNECTIONS.
3. THIS DETAIL HAS BEEN DERIVED FROM CITY STANDARD DETAIL C-104.

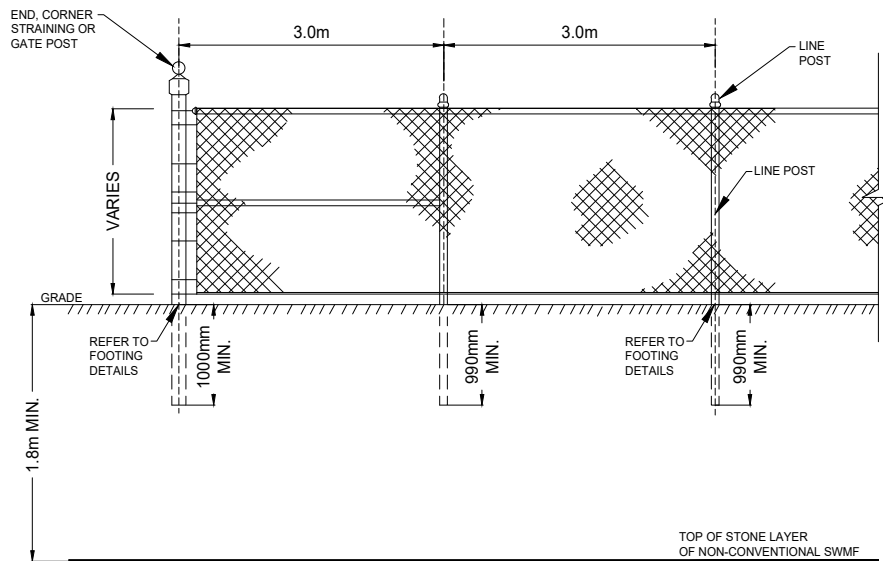

FENCE DETAILS

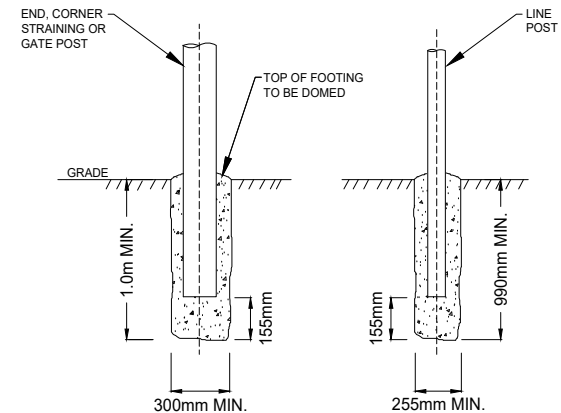

FOOTING DETAILS

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO CHAIN LINK FENCES ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY STANDARD DETAIL FRW-101 FOR ADDITIONAL SPECIFICATIONS ON CHAIN LINK FENCES.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

**CHAIN LINK SECURITY FENCE (TYP.)
ABOVE A NON-CONVENTIONAL SWMF**


NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025

STD. DWG.

S - 120

Acad File: C:\Users\vaughan\OneDrive\Documents\City of Vaughan\City Standards - General\Design Criteria\2020\Draw - Standards\DWG-S-121 - Pedestrian Bicycle Handrail (Typ.) Above a Non-conventional SWMF - New.dwg

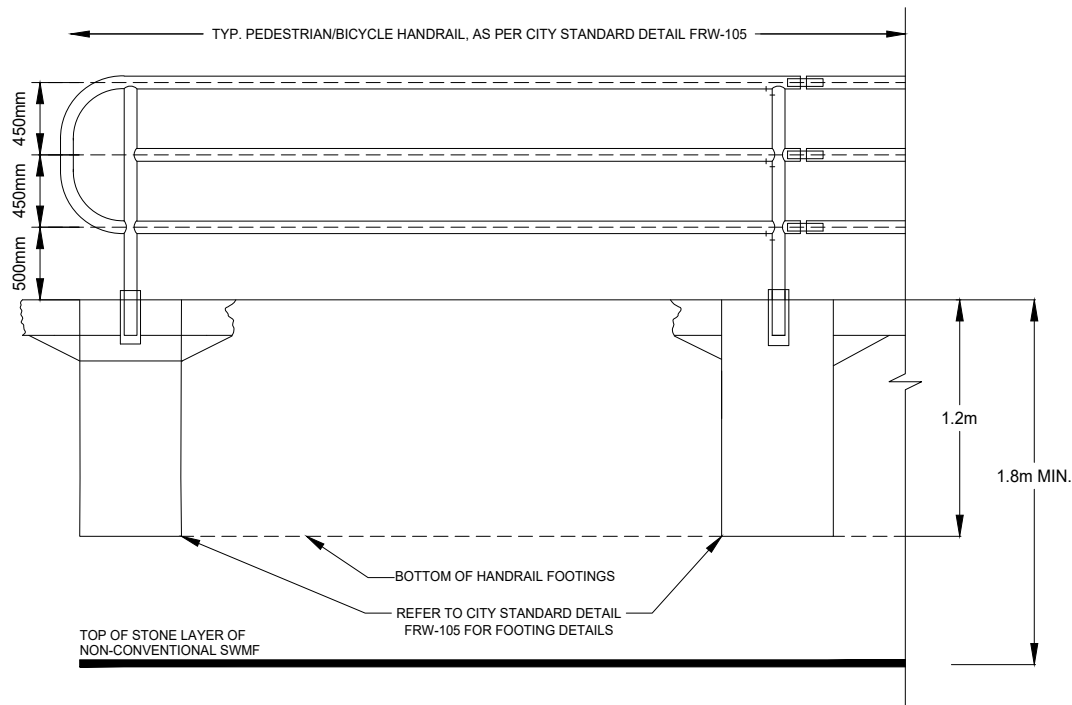

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

PEDESTRIAN BICYCLE HAND RAIL (TYP.) DETAIL
ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE

DESIGNED: _____

REVISION: _____


DATE: JAN. 2025

STD. DWG.

S - 121

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO PEDESTRIAN/BICYCLE HANDRAILS ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY STANDARD DETAIL FRW-105 FOR ADDITIONAL SPECIFICATIONS ON HANDRAILS
3. THIS STANDARD TO BE USED IN PLACE OF OPSD 980.101 WHERE ADDITIONAL RAIL HEIGHT IS REQUIRED (SUCH AS BICYCLE TRAIL).

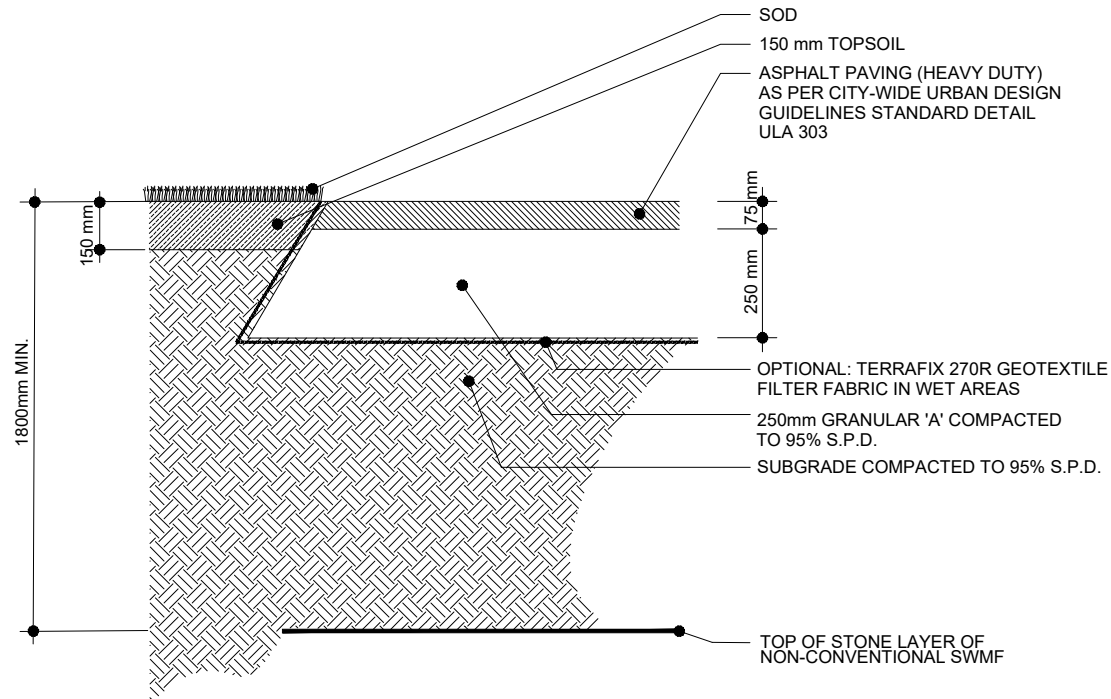

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

ASPHALT PAVING - HEAVY DUTY (TYP.)
ABOVE A NON-CONVENTIONAL SWMF
LOCATED WITHIN ROW

NOT TO SCALE DESIGNED: _____


REVISION: _____ DATE: JAN. 2025

STD. DWG.

S - 122

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO PATHWAYS ABOVE NON-CONVENTIONAL SWMF LOCATED WITHIN ROW. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 303 FOR HEAVY-DUTY PAVING DETAILS.

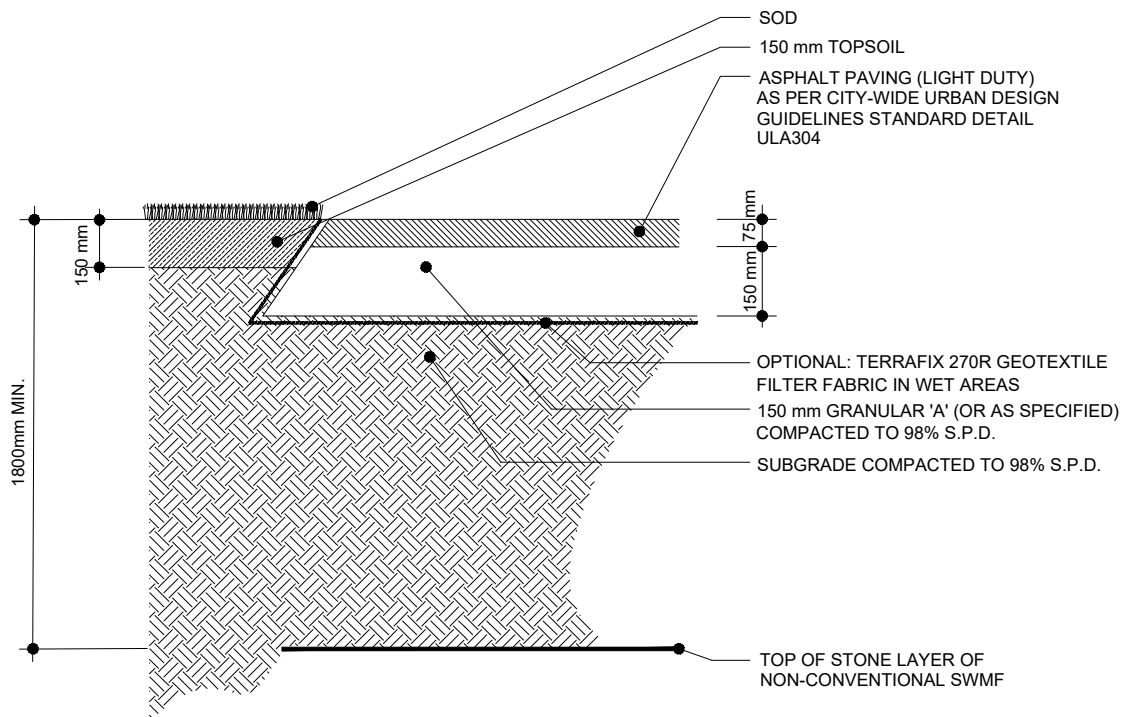

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

ASPHALT PAVING - LIGHT DUTY (TYP.)
ABOVE A NON-CONVENTIONAL SWMF
LOCATED WITHIN ROW

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025


STD. DWG.

S - 123

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO PATHWAYS ABOVE NON-CONVENTIONAL SWMF LOCATED WITHIN ROW. REFER TO CITY-WIDE URBAN DESIGN GUIDELINES STANDARD DETAIL ULA 304 FOR LIGHT-DUTY PAVING DETAILS.

Acad File: C:\Users\loadings\City of Vaughan\City Standards - General\Design Criteria 2025\Var - Decorative Pole (Typ) Above a Non-conventional SWMF - heading

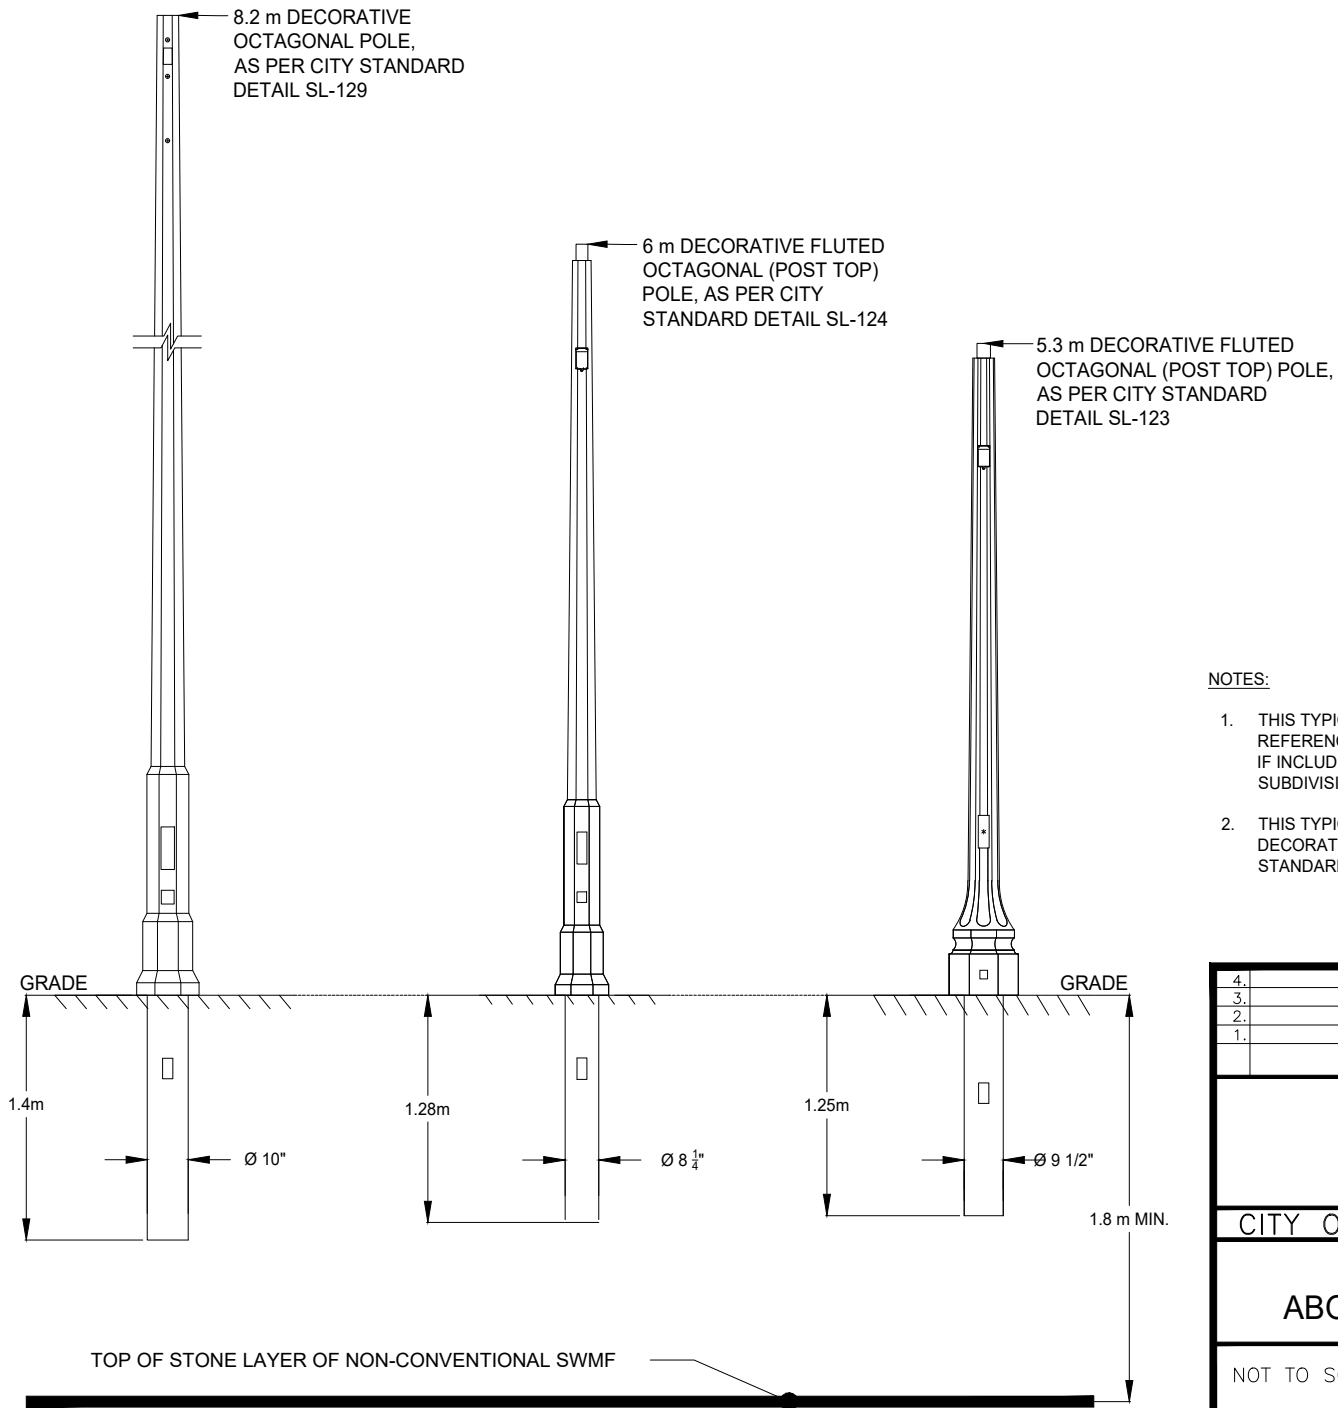

NOTES:

1. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
2. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO DECORATIVE POLES ABOVE NON-CONVENTIONAL SWMF. REFER TO CITY STANDARD DETAILS: SL-123, SL-124 AND SL-129 FOR POLE DETAILS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD


DECORATIVE POLE (TYP.)
ABOVE A NON-CONVENTIONAL SWMF

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025

STD. DWG.

S - 124

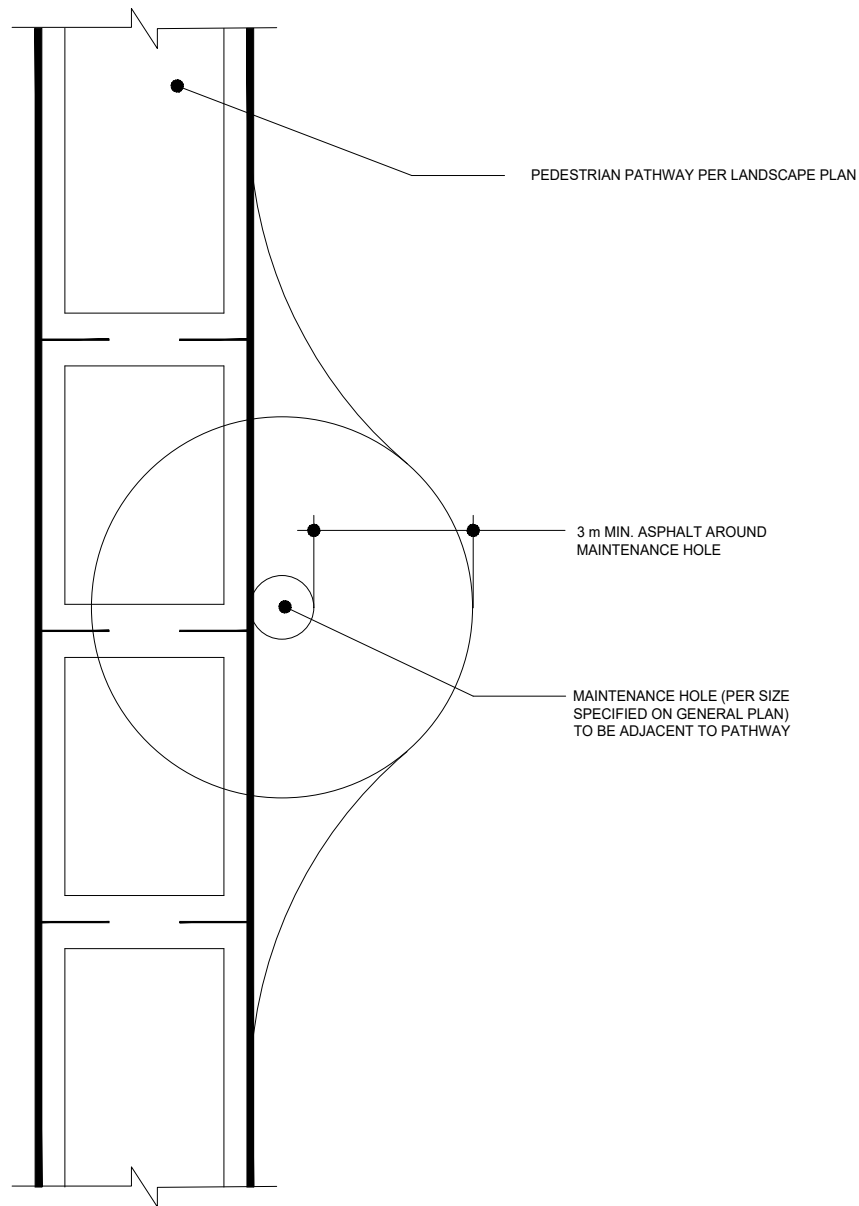

NOTES:

1. PATHWAY TYPE SHALL BE SPECIFIED IN LANDSCAPE PLAN
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.
3. THIS TYPICAL DETAIL IS INTENDED TO DISPLAY DETAILS WITH RESPECT TO MAINTENANCE HOLES FOR NON-CONVENTIONAL SWMF. REFER TO RELEVANT CITY STANDARDS FOR PAVING/PATHWAY DETAILS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD


**MAINTENANCE HOLE BUMP OUT FROM
PEDESTRIAN PATH FOR NON-CONVENTIONAL SWMF**

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025

STD. DWG.

S - 125

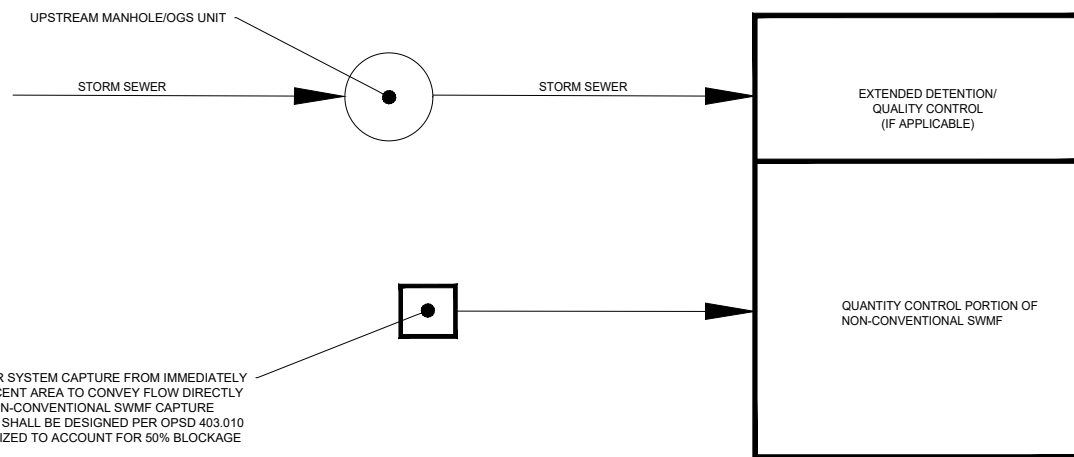

PLAN VIEW - NON-CONVENTIONAL SWMF
INLET SAMPLE CONFIGURATION

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD
CONCEPTUAL STORM SEWER CONNECTION
TO NON-CONVENTIONAL SWMF DETAIL

NOT TO SCALE DESIGNED: _____
REVISION: _____ DATE: JAN. 2025

STD. DWG.
S - 126

NOTES:

1. DETAIL REPRESENTS MAXIMUM DEPTH TO NON-CONVENTIONAL SWMF'S WITHIN PROPOSED ROW'S AND MAXIMUM INSPECTION/MAINTENANCE PORT SPACING.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.

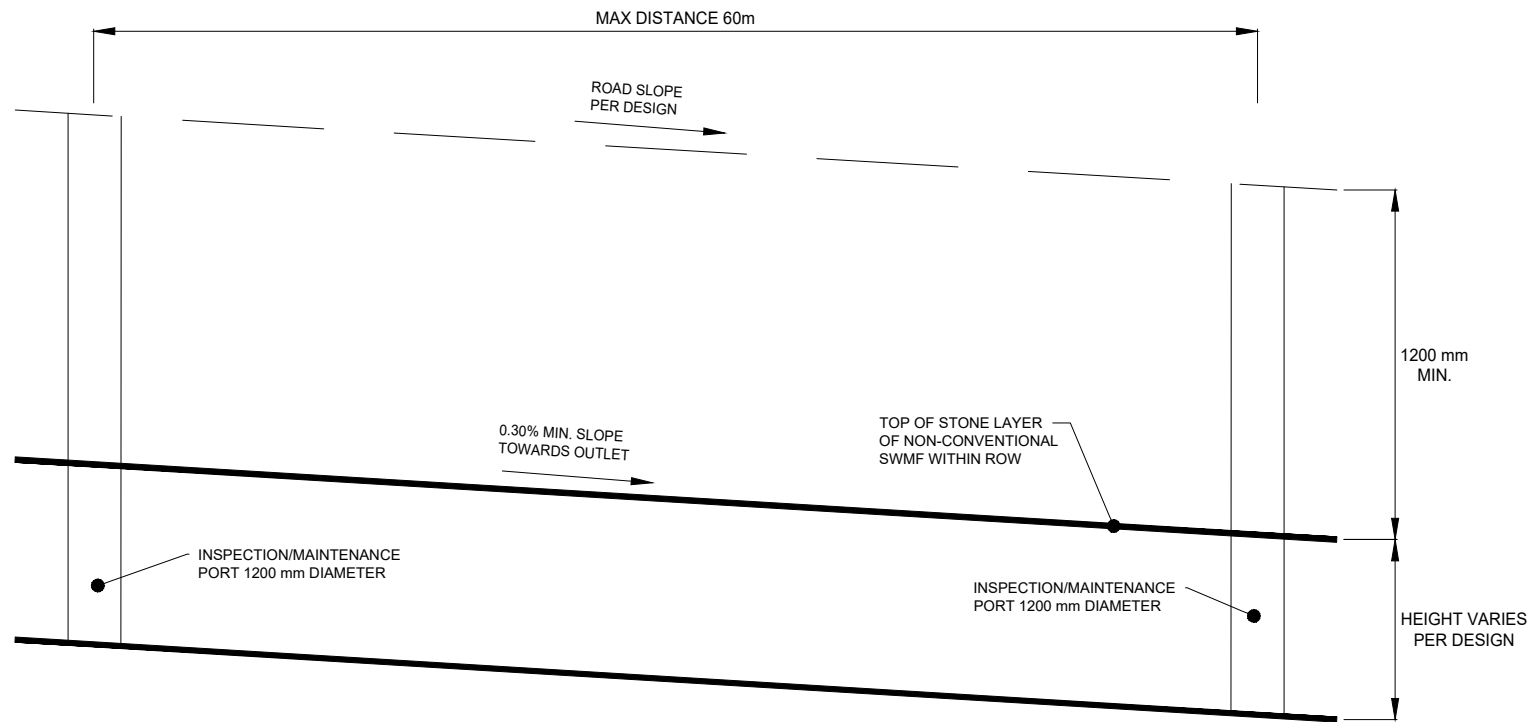

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

CONCEPTUAL NON-CONVENTIONAL SWMF WITHIN ROW LAYOUT

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: JAN. 2025


STD. DWG.

S - 127

NOTES:

1. DETAIL REPRESENTS MAXIMUM DEPTH TO NON-CONVENTIONAL SWMF'S WITHIN PROPOSED ROW'S AND MAXIMUM INSPECTION/MAINTENANCE PORT SPACING.
2. THIS TYPICAL DETAIL IS PROVIDED FOR DESIGN DIRECTION AND IS FOR REFERENCE ONLY. DETAIL MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER IF INCLUDED AS PART OF THE SITE PLAN APPLICATION OR DRAFT PLAN OF SUBDIVISION, AS APPLICABLE.

FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Update Folder\City Standards\Drawings_CAD_2021\W-101 - Single Valve in Chamber.dwg

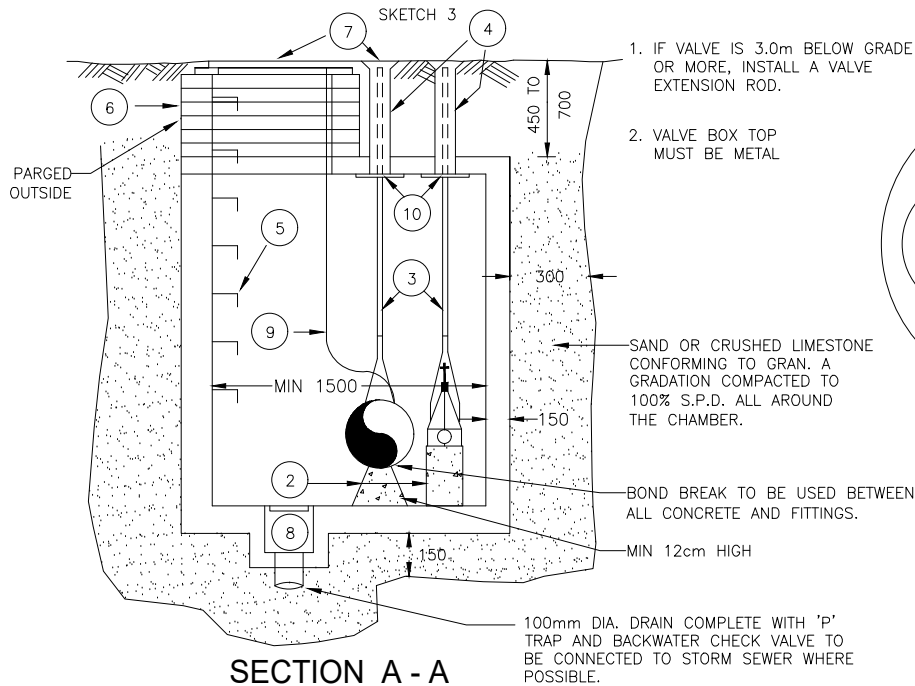




SECTION A - A

NOTES

1. CHAMBER TO BE DESIGNED FOR H₂O LOADING AT 300mm COVER.
2. VALVES SHALL BE FLANGED TYPE, COMPLETE WITH MECHANICAL JOINT FLANGE ADAPTER.
3. CATHODIC PROTECTION REQUIRED ON ALL METALLIC FITTINGS.
4. LINE VALVES TO OPEN CLOCKWISE EAST OF HWY. 400 OR NORTH OF RUTHERFORD RD., ALL OTHERS TO OPEN COUNTER-CLOCKWISE. (SEE STD. DWG. W-110)
5. FOR PRE-CAST CHAMBER ALL JOINTS SHALL BE SET IN A MORTAR BED AND PARGED OUTSIDE.
6. VALVES UP TO AND INCLUDING 400 mm DIAMETER SHALL BE GATE VALVES OF THE RESILIENT WEDGE TYPE, AWWA STANDARD C509. VALVES LARGER THAN 400mm SHALL BE BUTTERFLY VALVES OR AS SPECIFIED BY THE CITY.
7. RESTRAINTS REQUIRED INSIDE CHAMBER. RESTRAINTS OUTSIDE CHAMBER REQUIRED IN ACCORDANCE WITH STD. DWG. W-105.

LEGEND

- 1 WATERMAIN PIPE (SKETCH 1)
- 2 CONCRETE VALVE SUPPORT (MIN. 12cm)
- 3 SOLID STEEL EXTENSION STEM
- 4 VALVE BOX TOP SECTION
- 5 ALUMINUM RUNGS AS PER OPSD 406.010
- 6 PRECAST CONCRETE ADJUSTER RINGS TO BE MAX. 300 mm OTHERWISE POURED COLLARS ARE TO BE USED IN CONJUNCTION WITH RINGS.
- 7 VALVE CHAMBER FRAME & COVER TO BE AS PER OPSD 401.010, LABELLED WATER SET TO FINISHED GRADE.
- 8 400 x 400 x 150 DEEP SUMP WITH REMOVABLE GALVANIZED GRATE.
- 9 BRING TRACER WIRE (AWG #9) TO MODULOC UNDER LID WITH ELECTRICAL CLIP ENDS ATTACHED/FASTENED TO THE TOPMOST PORTION OF THE CHAMBER WALL
- 10 6.5m GALV. STEEL PLATE GUIDE FOR STEM EXTENSION PER OPSD 1101.020
- 11 VALVE CHAMBER COVER & VALVE BOXES TO BE SET TO FINISH GRADE.

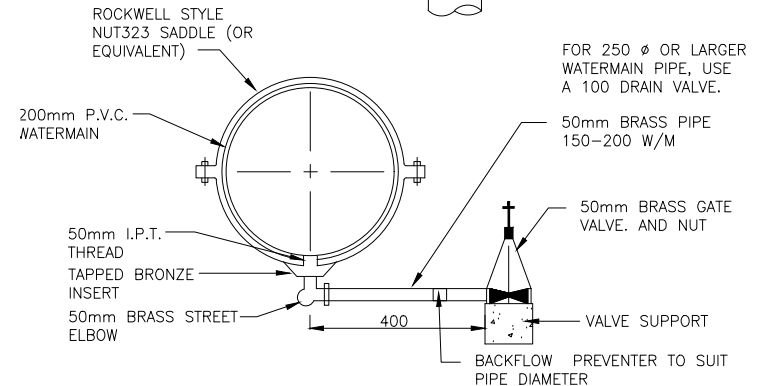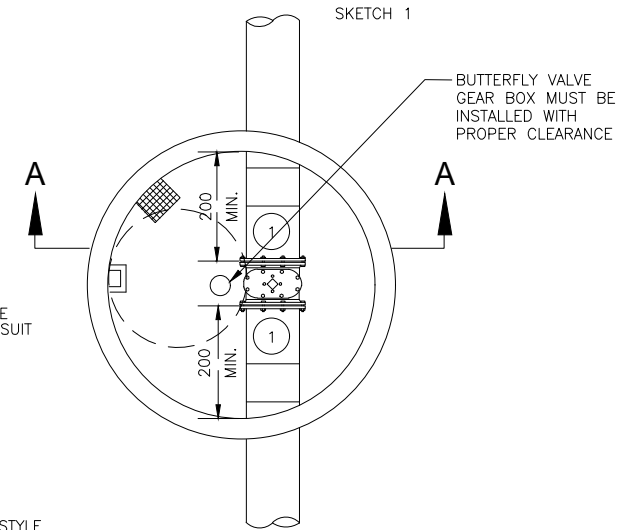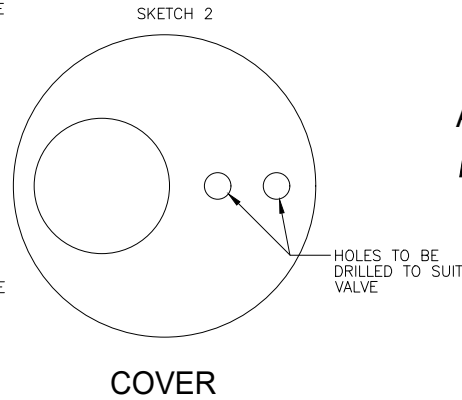

DRAIN VALVE DETAIL WHEN REQUIRED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

SINGLE VALVE IN CHAMBER


NOT TO SCALE
DESIGNED: _____
REVISION: _____
DATE: DEC. 2020

STD. DWG.
W - 101


mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

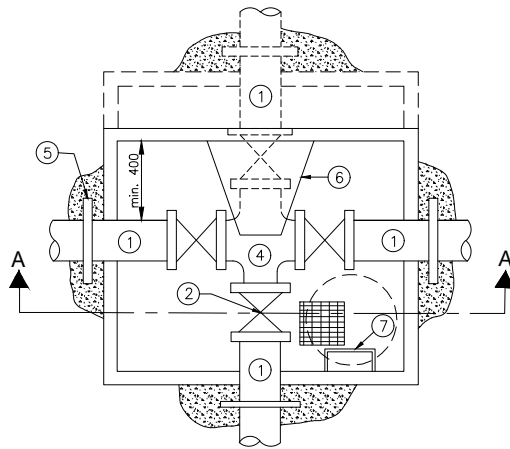


PLAN

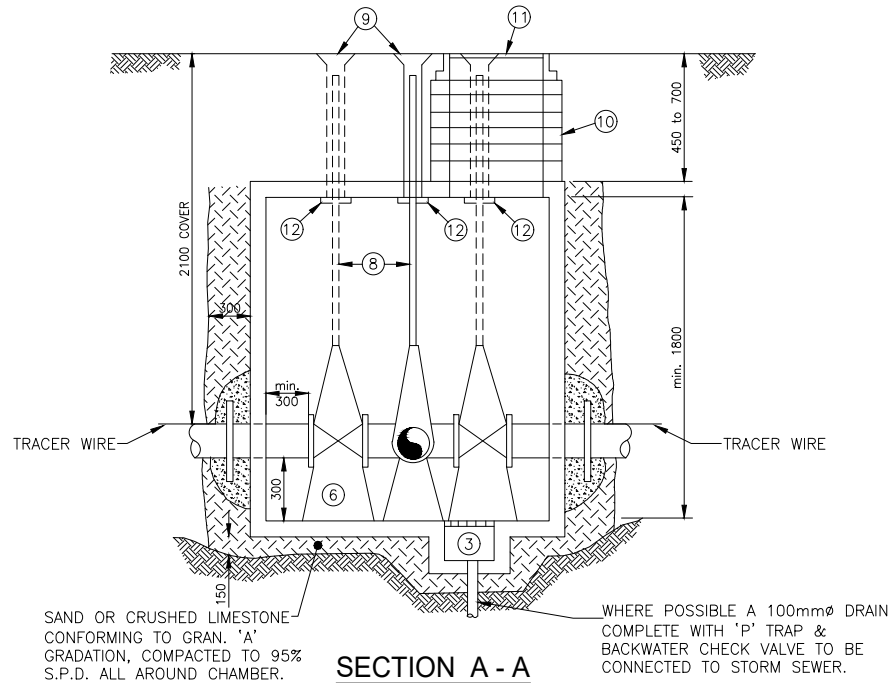

SECTION A - A



COVER

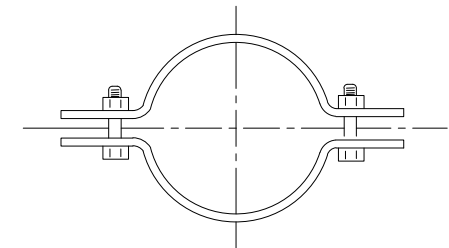

TYPICAL PIPE ANCHOR

NOTES

1. CHAMBER TO BE DESIGNED FOR H₂O LOADING AT 300mm COVER.
2. VALVES SHALL BE FLANGED TYPE, COMPLETE WITH MECHANICAL JOINT FLANGE ADAPTER.
3. CATHODIC PROTECTION REQUIRED ON ALL METALLIC FITTINGS.
4. LINE VALVES TO OPEN CLOCKWISE EAST OF HWY. 400 OR NORTH OF RUTHERFORD RD., ALL OTHERS TO OPEN COUNTER-CLOCKWISE. (SEE STD. DWG. W-110)
5. FOR PRE-CAST CHAMBER, ALL JOINTS SHALL BE SET IN A MORTAR BED AND PARGED OUTSIDE.
6. RESTRAINTS REQUIRED INSIDE CHAMBER. RESTRAINTS OUTSIDE CHAMBER REQUIRED IN ACCORDANCE WITH STD. DWG. W-105.
7. VALVES UP TO AND INCLUDING 400mm DIA. SHALL BE GATE VALVE OF THE RESILIENT WEDGE TYPE. TYPE AWWA STANDARD C509. VALVES LARGER THAN 400mm SHALL BE BUTTERFLY VALVE OR AS SPECIFIED BY THE CITY
8. USE CONCRETE JOINT TAPE BETWEEN LAYERS OF GRADE ADJUSTMENT UNITS.

LEGEND

- | | |
|---|---|
| <ol style="list-style-type: none"> ① PIPE SECTIONS WITH UNIFLANGE FITTINGS THROUGH CHAMBER WALLS. ② FLANGE GATE VALVES ③ 300x300x150 DEEP SUMP WITH REMOVABLE GLAVANIZED GRATE ④ FLANGE TEE OR CROSS ⑤ PIPE ANCHOR EMBEDDED IN CONCRETE ⑥ POURED CONCRETE SUPPORT AND THRUST BLOCKS WITH BOND BREAK FOR VALVES, TEES & CROSSES. ⑦ ALUMINUM RUNGS AS PER OPSD 406.010 | <ol style="list-style-type: none"> ⑧ SOLID STEEL EXTENSION STEM. ⑨ VALVE BOX TOP SECTION, EACH VALVE SET TO FINISH GRADE ⑩ PRECAST CONCRETE ADJUSTER RINGS TO BE MAX. 300 mm OTHERWISE POURED COLLARS ARE TO BE USED IN CONJUNCTION WITH RINGS. ⑪ VALVE CHAMBER FRAME & COVER TO BE AS PER OPSD 401.010, LABELLED WATER SET TO FINISHED GRADE. ⑫ 6.5mm GALV. STEEL PLATE GUIDE FOR STEM EXTENSION PER O.P.S.D. 1101.020. ⑬ TRACER WIRE (AWG #9) - INDEPENDENT TRACER WIRE ON EACH SECTION OF PIPE & LABELLED. |
|---|---|

mm DIMENSIONS IN MILLIMETRES EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD


MULTIPLE VALVE CHAMBER

NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: DEC. 2020

STD. DWG.
W - 102

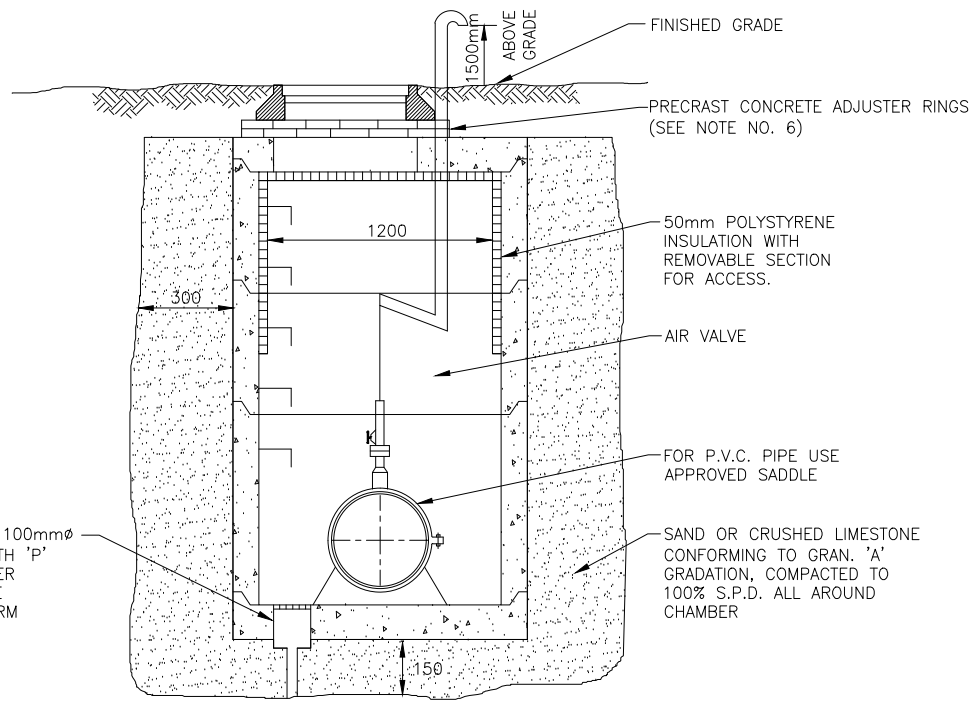

SECTION 'A-A'

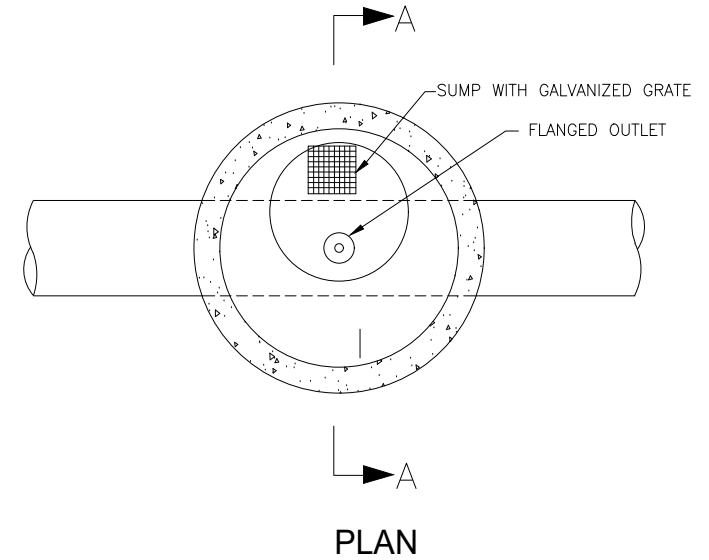


PLAN

NOTES

1. 25mm, 50mm AND 75mm AIR RELEASE/VACCUUM VALVE TO BE STAINLESS STEEL FOR SEWAGE APPLICATIONS.
2. GATE VALVE & AIR VALVE TO BE INSULATED WITH FOAMGLASS OR APPROVED EQUAL.
3. FOR PRECAST CHAMBERS ALL JOINTS SHALL BE SET IN A MORTAR BED AND PARGED OUTSIDE.
4. CONTINUOUS RUBBER GASKET BETWEEN PRECAST LAYERS.
5. AIR VENTS TO BE INSTALLED IN BOULEVARD SECTION.
6. PRECAST CONCRETE ADJUSTER RINGS (E.G. MODULOC) TO BE MAX. 300mm OTHERWISE POURED COLLARS ARE TO BE USED IN CONJUNCTION WITH RINGS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
AIR RELEASE VALVE CHAMBER		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	W - 103

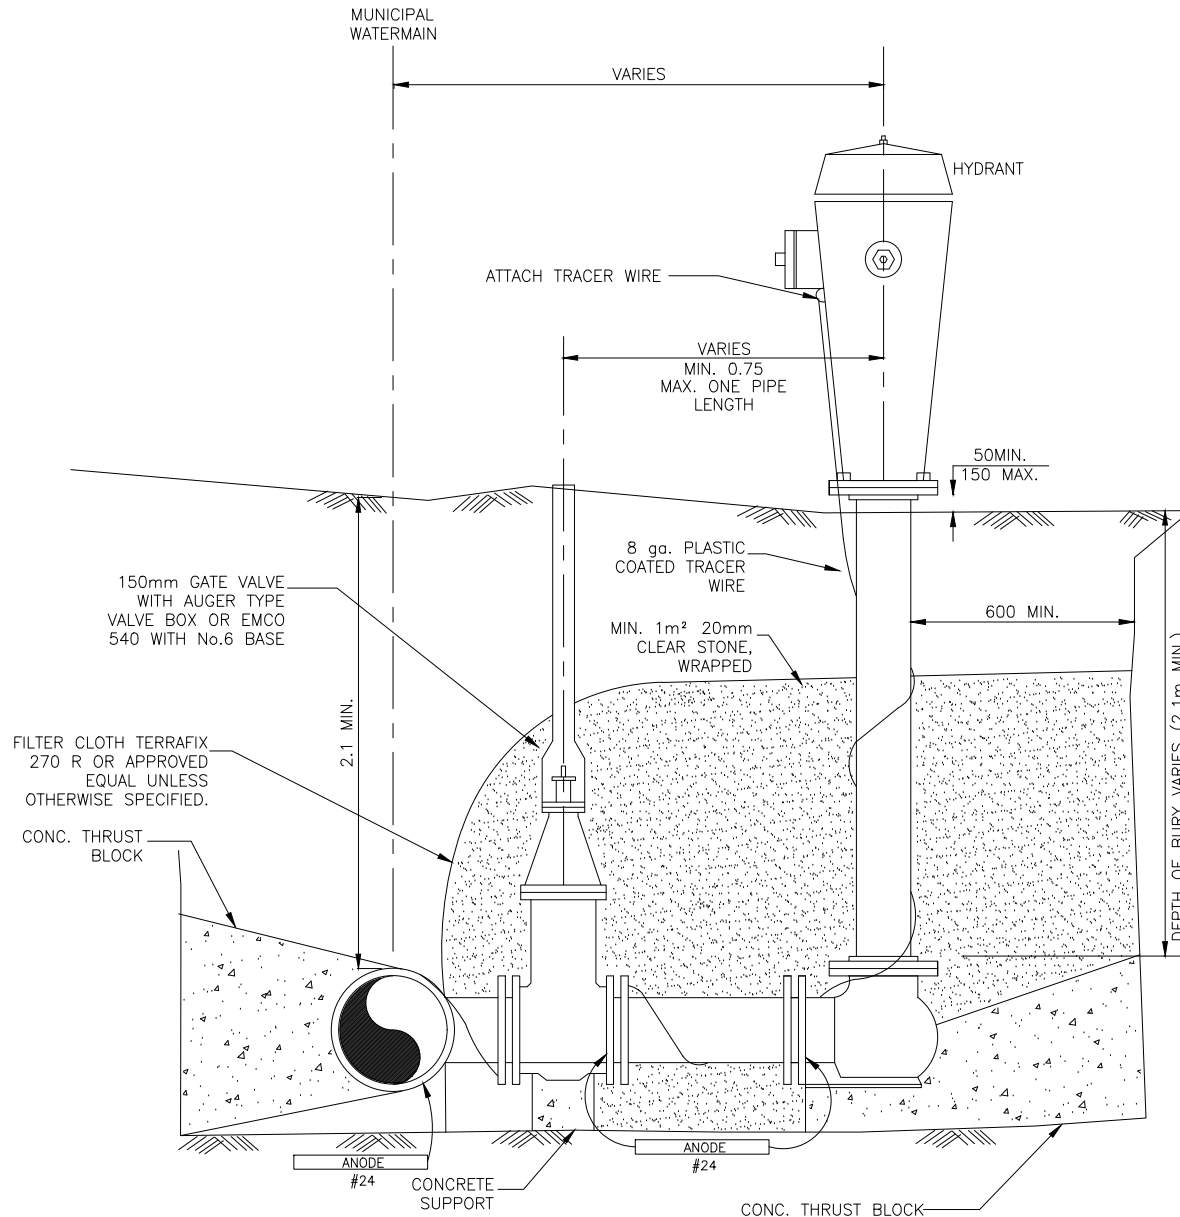

NOTES

1. ALL HYDRANTS LEADS TO BE 150mm DIA.
2. HYDRANTS TO BE DARLING "CENTURY" OR APPROVED EQUAL.
3. VALVE SHALL BE CONNECTED DIRECTLY TO MUNICIPAL WATERMAIN ANCHOR TEE UNLESS OTHERWISE DIRECTED BY THE CITY.
4. CONCRETE TO BE 20 MPa AT 28 DAYS.
5. ALL CONCRETE THRUST BLOCKS TO BE POURED AGAINST UNDISTURBED GROUND.
6. STONE SHALL BE COMPLETELY ENVELOPED BY FILTER CLOTH.
7. ALL HYDRANTS TO OPEN COUNTER CLOCKWISE.
8. DEPTH OF HYDRANT VARIES ACCORDING TO LOCAL TOPOGRAPHY.
9. 100mm DIA. STORZ CONNECTION ON PUMPER NOZZLE.
10. STORZ CONNECTIONS TO FIRE HYDRANTS TO BE PAINTED BLACK.
11. SECONDARY VALVES TO OPEN CLOCKWISE EAST OF HWY. #400 OR NORTH OF RUTHERFORD ROAD. ALL OTHERS TO OPEN COUNTERCLOCKWISE.
12. DRAIN HOLES TO BE PLUGGED IN AREAS WHERE HYDRANT VALVES ARE INSTALLED BELOW THE GROUND WATER TABLE.
13. CATHODIC PROTECTION REQUIRED ON ALL METALLIC FITTINGS.
14. POLYETHYLENE BOND BREAKER TO BE USED BETWEEN CONCRETE AND FITTINGS.
15. SECONDARY VALVES TO BE LOCATED IN BLVD. (NOT ON ROAD) AND SET TO FINISH GRADE.
16. ONCE THE TRACER WIRE HAS BEEN INSTALLED AND CONSTRUCTION IS COMPLETE, A CONTINUITY TEST SHOULD BE CONDUCTED TO CONFIRM THAT THE TRACER WIRE IS CONTINUOUS AND REMAINS INTACT. IF THERE IS A BREAKAGE IN THE WIRE, THE CONTRACTOR IS RESPONSIBLE TO REPLACE IT AT THEIR OWN COST.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

HYDRANT INSTALLATION






NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: DEC. 2020

STD. DWG.

W - 104

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

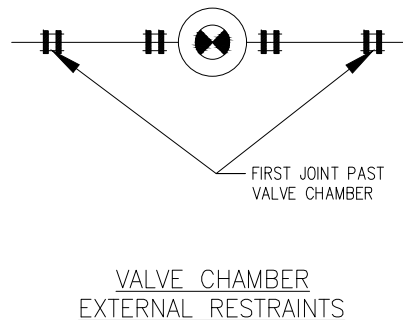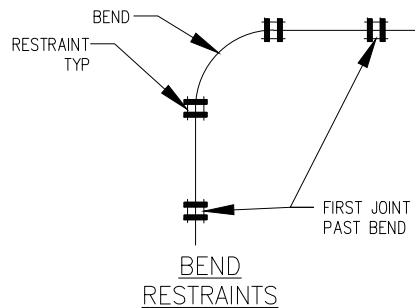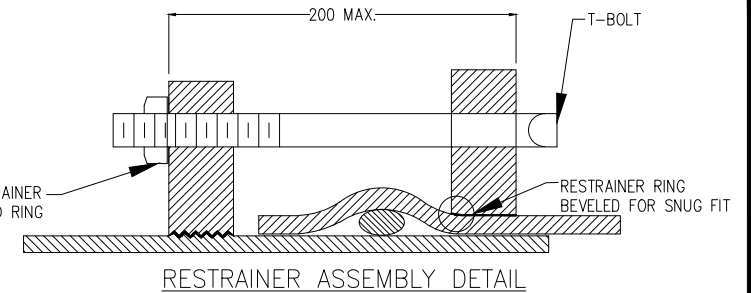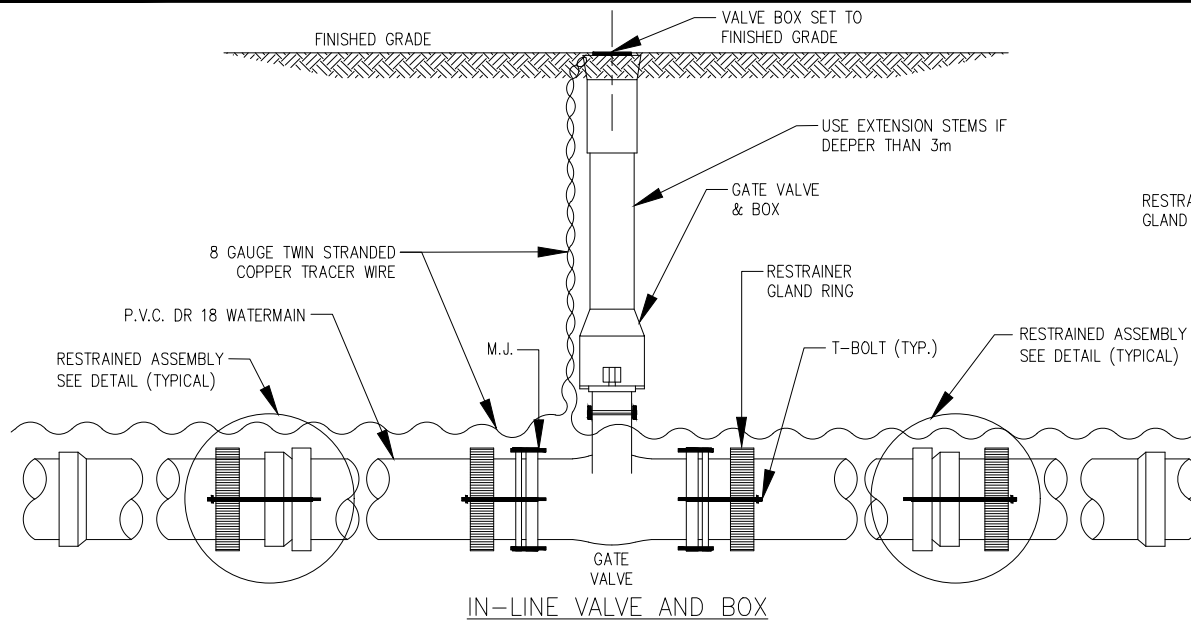

NOTES

1. ALL JOINTS WITHIN 2 PIPE LENGTHS EACH SIDE FROM GATE VALVE SHALL BE RESTRAINED WITH MECHANICAL JOINT RESTRAINTS
2. MECHANICAL RESTRAINTS SHALL BE EITHER "UNIFLANGE" OR "MEGALUG" BRAND OR APPROVED EQUIVALENT, AND ARE TO BE USED AS FOLLOWS:

AT 45°, 22½°, AND 11¼° HORIZONTAL AND VERTICAL BENDS - ONE PIPE LENGTH EACH WAY;
 AT TEES - TWO PIPE LENGTHS EACH WAY;
 AT REDUCERS - TWO PIPE LENGTHS EACH WAY;
 AT DEAD END - THREE PIPE LENGTHS;
 AT VALVES - TWO PIPE LENGTHS EACH WAY (EXCLUDING VALVE CHAMBERS);

NOTE: JOINT RESTRAINTS ARE NOT REQUIRED FOR PIPES CONNECTED WITH HDD CONNECTION JOINTS. (E.G. TERRA BRUTE OR COBRA LOCK JOINTS).

3. CATHODIC PROTECTION (6 LB ANODE) REQUIRED ON ALL RESTRAINERS.
4. WATERMAIN TO BE RESTRAINED IN ALL FILL AREAS, AREAS ANTICIPATED TO BE DISTURBED AND OR AS DIRECTED BY THE CITY
5. WATER REPELLENT COATING WRAP ALL THROW AWAY VALVES AS PER SECTION 1.5.4.6 CORROSION PROTECTION OF METALLIC FITTINGS.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.	UPDATED NOTES 4 & 5	03/24
	REVISIONS	DATE




CITY OF VAUGHAN ENGINEERING STANDARD


RESTRAINING OF P.V.C. WATERMAIN AT VALVES AND FITTINGS

NOT TO SCALE DESIGNED: _____
 REVISION: 1 DATE: DEC. 2020

STD. DWG.
W - 105

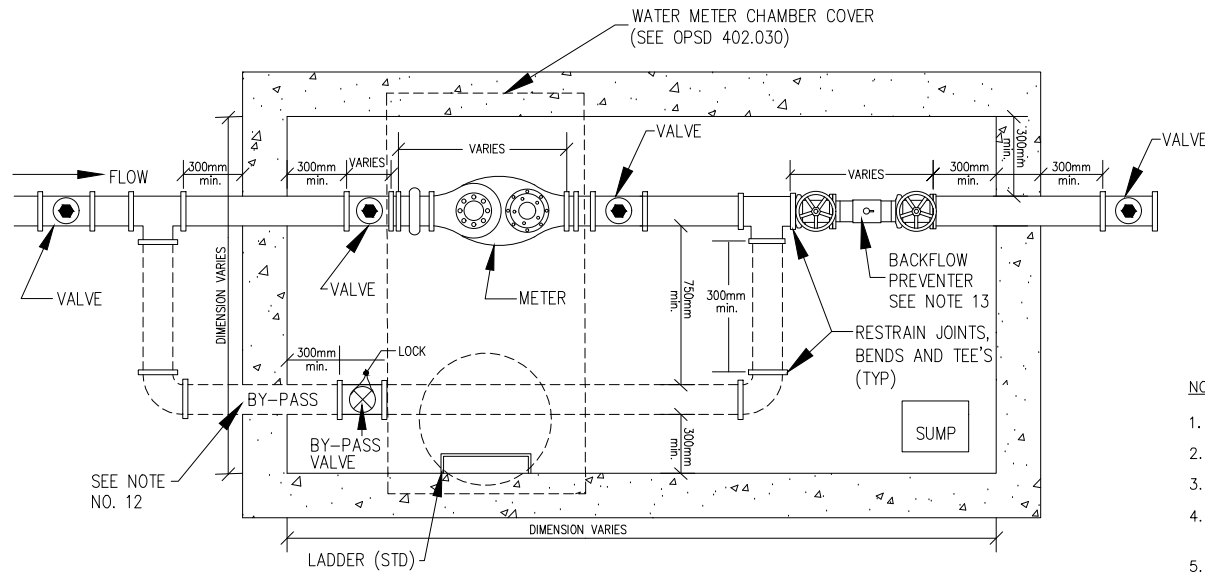

PLAN VIEW

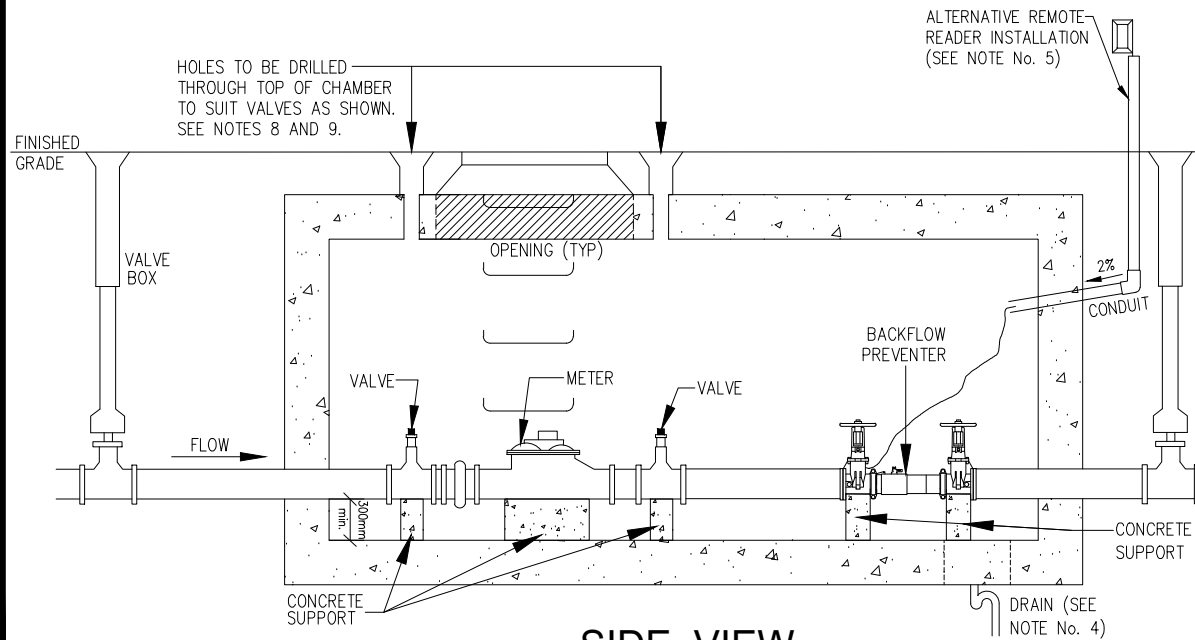


SIDE VIEW

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

TYPICAL INSTALLATION

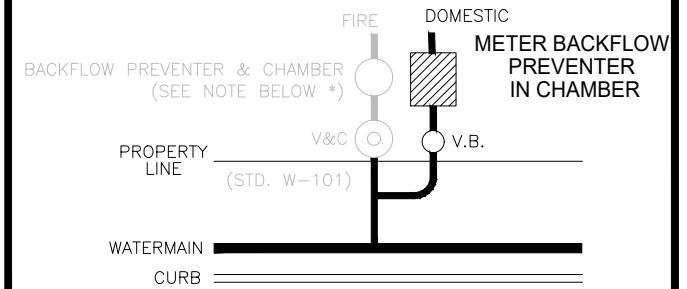

* BACKFLOW PREVENTER SHALL BE INSTALLED PER STD. W-111 WHEN HYDRANT CONNECTION IS PROPOSED FOR THE DEVELOPMENT

NOTES:

1. CONCRETE TO BE 32MPa COMPRESSIVE STRENGTH.
2. COPPER PIPE TO BE TYPE K.
3. CHAMBER COVER & FRAME TO BE 2 PIECE.
4. 100mm DIA. DRAIN COMPLETE WITH 'P' TRAP AND BACK WATER VALVE TO BE CONNECTED TO STORM SEWER.
5. 50mm CONDUIT TO BE INSTALLED FROM CHAMBER WALL TO AN ACCESSIBLE AND PERMANENT LOCATION APPROVED BY THE CITY.
6. CHAMBER TO BE DESIGNED FOR H2O LOADING AT 300mm COVER.
7. DIMENSIONS OF THE CHAMBER AND ALL INTERNAL CONNECTIONS SHALL BE VERIFIED BEFORE INSTALLATION.
8. VALVES TO BE EQUIPPED WITH KEY TYPE OPERATING NUT.
9. 6.5mm GALV. STEEL PLATE GUIDE FOR STEM EXTENSION PER O.P.S.D. 1101.020.
10. SEE STANDARD DRAWING W-101, W-107 & W-111 FOR ADDITIONAL NOTES.
11. BYPASS PIPE TO BE ONE (1) PIPE SIZE SMALLER THAN SERVICE CONNECTION OR MINIMUM 2" DIAMETER.
12. NO PERSON SHALL INSTALL OR PERMIT THE INSTALLATION OF A BYPASS UNLESS AUTHORIZED BY THE CITY AND THE BYPASS IS VALVED AND LOCKED BY THE CITY.
13. BACKFLOW DEVICE TO BE SELECTED, INSTALLED AND TESTED IN THE CONFORMANCE WITH CSA B64 "SELECTION INSTALLATION OF BACKFLOW PREVENTERS AND AS PER MANUFACTURE RECOMMENDATIONS".

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

METER, BACKFLOW PREVENTER
IN CHAMBER

NOT TO SCALE


DESIGNED:

REVISION:

DATE: DEC. 2020

STD. DWG.

W - 106

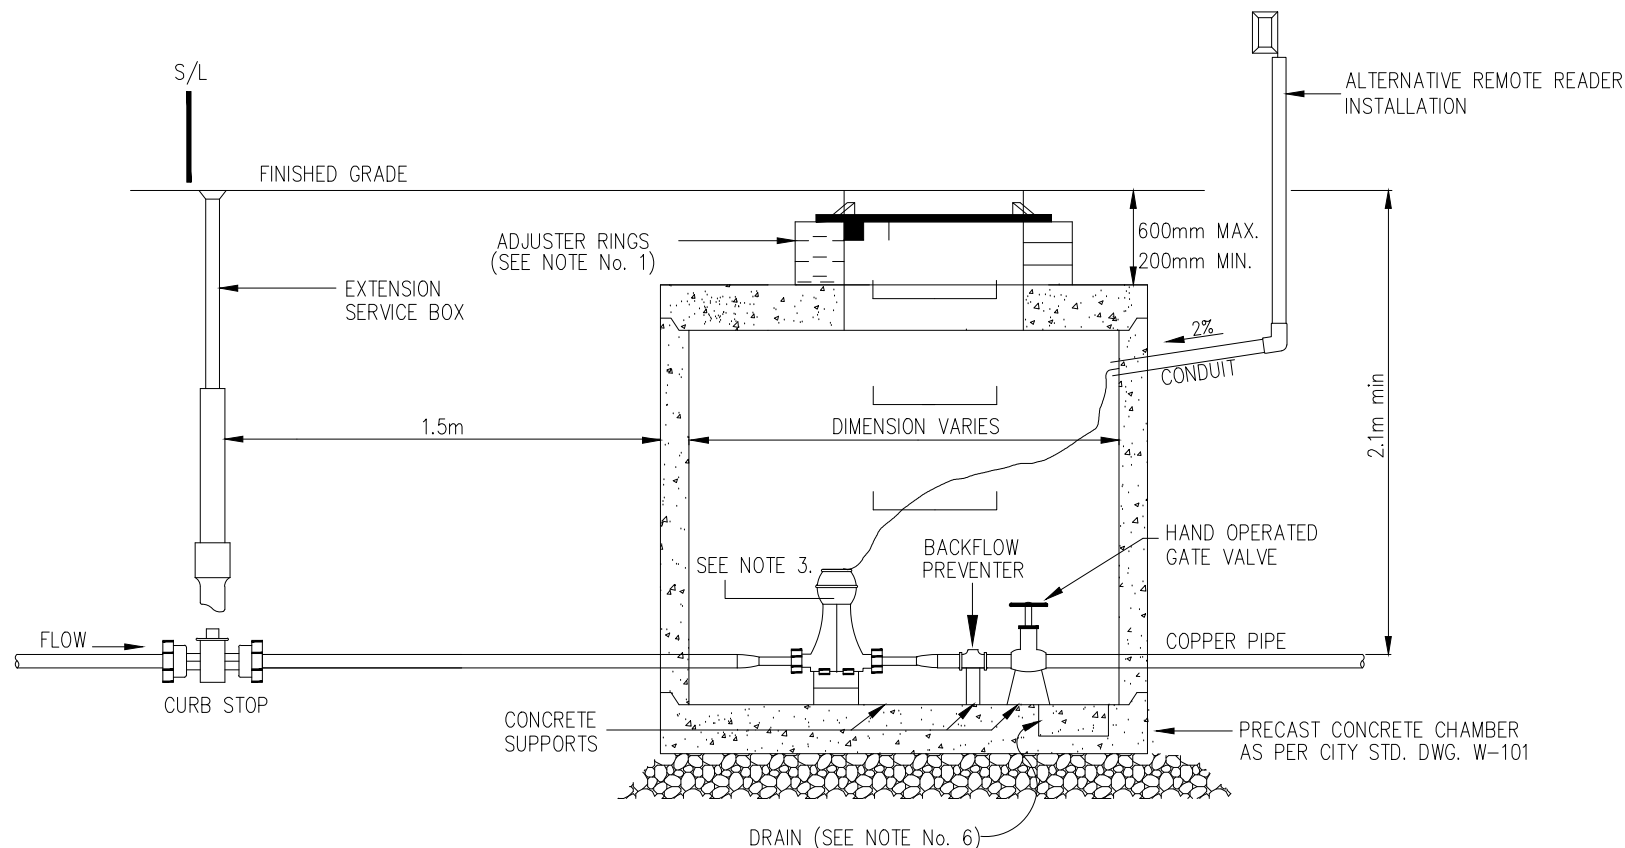

NOTES


1. PRECAST CONCRETE ADJUSTER RINGS (E.G., MOUDLOC) TO BE MAX. 300 mm OTHERWISE POURED COLLARS ARE TO BE USED IN CONJUNCTION WITH RINGS. MODULOC TAPE TO BE PLACED BETWEEN RINGS.
2. 50mm CONDUIT TO BE INSTALLED FROM CHAMBER WALL TO AN ACCESSIBLE AND PERMANENT LOCATION APPROVED BY THE CITY.
3. REDUCERS AS REQUIRED FOR 40mm AND 50mm METER INSTALLATIONS.
4. 'FORD' LOC PAK COUPLING OR APPROVED EQUAL REQUIRED FOR 40mm AND 50mm METERS.
5. FOR PRE-CAST CHAMBER ALL JOINTS SHALL BE SET IN A MORTAR BED AND PARGED OUTSIDE.
6. 100mm DIA. DRAIN COMPLETE WITH 'P' TRAP AND BACK WATER VALVE TO BE CONNECTED TO STORM SEWER.
7. CONCRETE SUPPORTS TO BE 20MPa COMPRESSIVE STRENGTH.
8. COPPER PIPE TO BE TYPE K HARD.
9. SEE STANDARD DRAWING W-101, W-106 & W-111 FOR ADDITIONAL NOTES.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
METER CHAMBER FOR COPPER SERVICES		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	W - 107

W-108 - INTENTIONALLY LEFT BLANK

Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

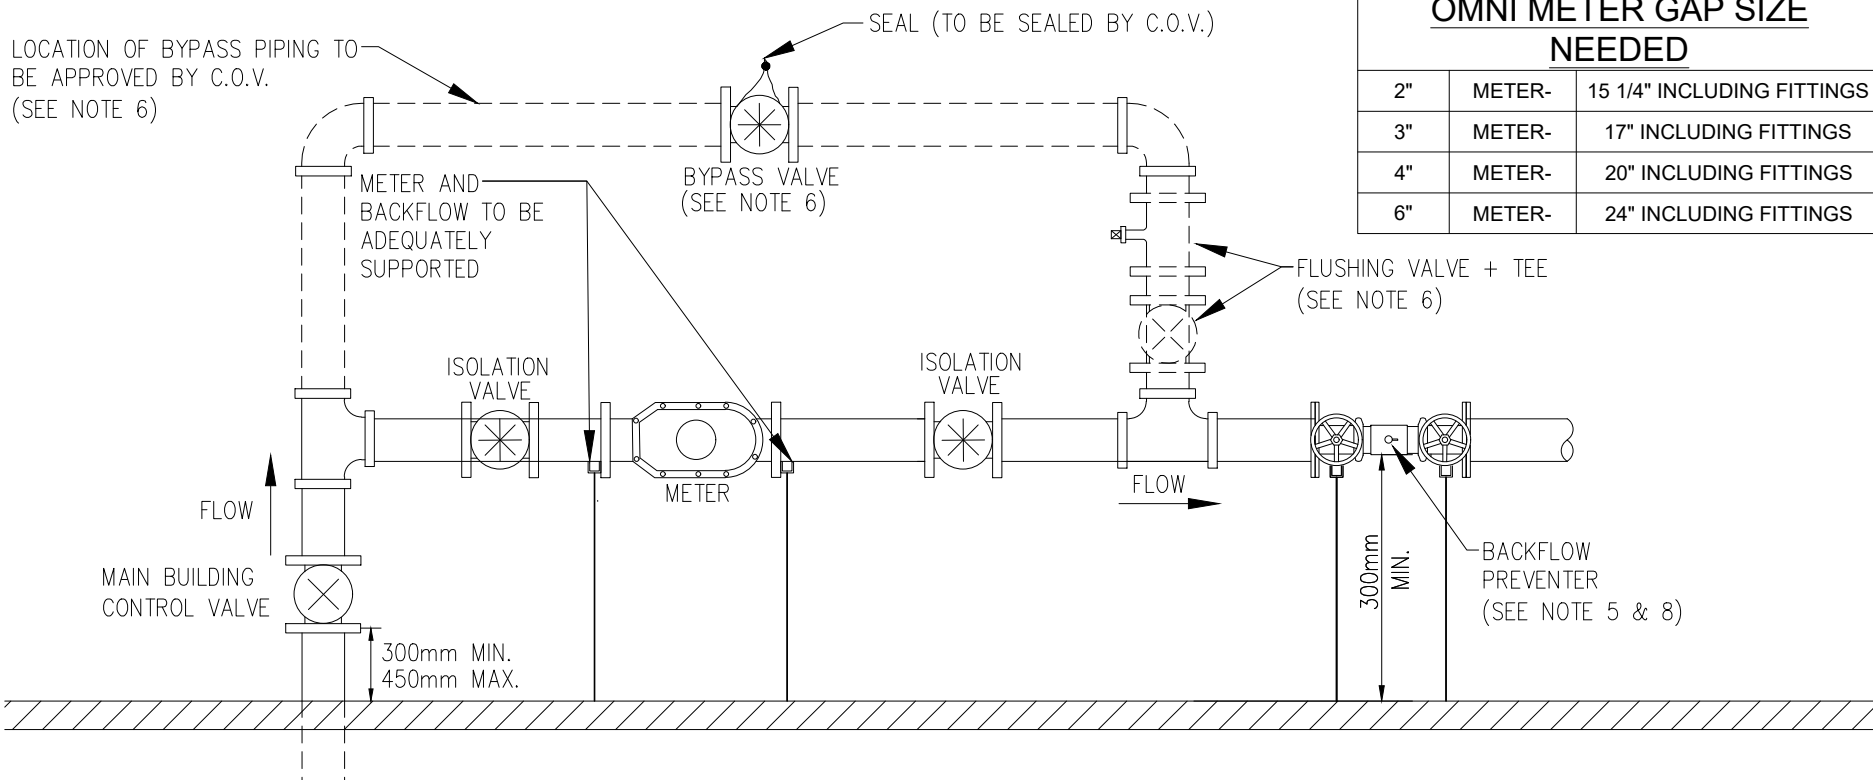

OMNI METER GAP SIZE NEEDED

2"	METER-	15 1/4" INCLUDING FITTINGS
3"	METER-	17" INCLUDING FITTINGS
4"	METER-	20" INCLUDING FITTINGS
6"	METER-	24" INCLUDING FITTINGS

NOTES:

- MUST HAVE FULLY FUNCTIONAL ISOLATION VALVES:
 - ON INLET SIDE TO METER
 - ON OUTLET SIDE TO METER
- SHALL BE NO CONNECTIONS BEFORE THE METER AND PREMISE BACKFLOW DEVICE.
- BYPASS NEEDED FOR SERVICES 2" AND GREATER. BYPASS PIPE TO BE ONE (1) PIPE SIZE SMALLER THAN SERVICE CONNECTION OR MINIMUM 2" DIAMETER.
- STRAINER NOT REQUIRED WITH OMNI METERS.
- BACKFLOW DEVICE TO BE SELECTED, INSTALLED AND TESTED IN CONFORMANCE WITH C.S.A. B64. SELECTION AND INSTALLATION OF BACKFLOW PREVENTERS AND AS PER MANUFACTURE RECOMMENDATIONS.
- NO PERSON SHALL INSTALL OR PERMIT THE INSTALLATION OF A BYPASS UNLESS AUTHORIZED BY THE CITY AND THE BYPASS IS VALVED AND LOCKED PROPERLY. IF APPROVED LOCKABLE FLUSHING VALVE AND TEE ARE TO BE INSTALLED.
- REMOTE READER TO BE ACCESSIBLE FROM OUTSIDE BUILDING.
- BACKFLOW DEVICE TO COMPLY WITH WITH BYLAW 004-2018 AS AMENDED.
- WHERE METER ROOM IS NOT ADJACENT TO AN OUTSIDE WALL OR IS BELOW EXTERIOR FINISHED GRADE, CONTRACTOR/APPLICANT SHALL PROVIDE A CONTINUOUS CONDUIT, COMPLETE WITH NYLON FINISH LINE FROM METER ROOM TO 1000mm ABOVE EXTERIOR FINISHED GRADE.
- BACKFLOW DEVICES ARE PERMITTED TO BE INSTALLED IN PARALLEL ARRANGEMENTS IN ORDER TO ALLOW UNINTERRUPTED SERVICE DURING BACKFLOW MAINTENANCE.
- ALL PIPING BETWEEN WATER METER AND BACFLOW DEVICE TO BE CLEARLY AND PERMANENTLY LABELLED "NO CONNECTION PERMITTED".

IF RP DEVICE IS INSTALLED DRAINAGE IS REQUIRED AS PER CSA B64. 10-17, 6.8.1 + 6.8.2

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

INDUSTRIAL / COMMERCIAL METER with BACKFLOW PREVENTER AND VALVE INSTALLATION (METER ROOM)

NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: DEC. 2020

STD. DWG.
W - 109

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

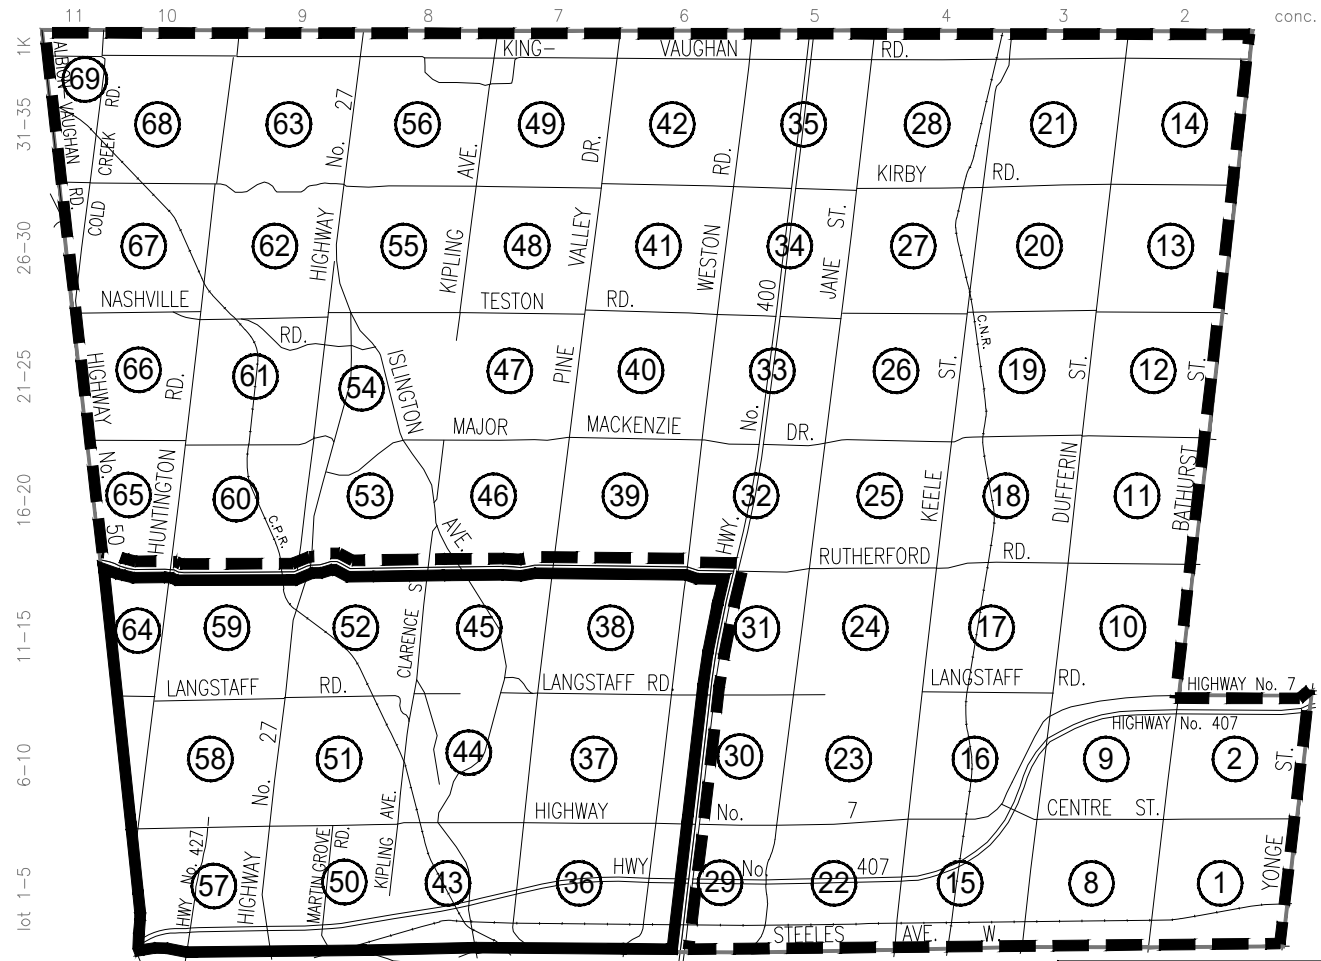

NOTE
NUMBERS IN CIRCLES ARE
DESIGNATED AS 'BLOCK'
NUMBERS.



TURN COUNTER-CLOCKWISE
LEFT TO OPEN
RIGHT TO CLOSE



TURN CLOCKWISE
RIGHT TO OPEN
LEFT TO CLOSE

NOTE

- ALL WATER, HYDRANT SEC. VALVES TO OPEN CLOCKWISE EAST OF HWY. 400 OR NORTH OF RUTHERFORD ROAD. ALL OTHERS TO OPEN COUNTER-CLOCKWISE.
- ALL HYDRANTS OPEN COUNTER CLOCKWISE

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

WATER VALVE OPEN / CLOSE DIRECTION


NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: DEC. 2020

STD. DWG.
W - 110


FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria\2020-21\City Standards Update Folder\CoS\StandardDrawings_CAD_2021\W-111 - Backflow Preventer & Chamber.dwg

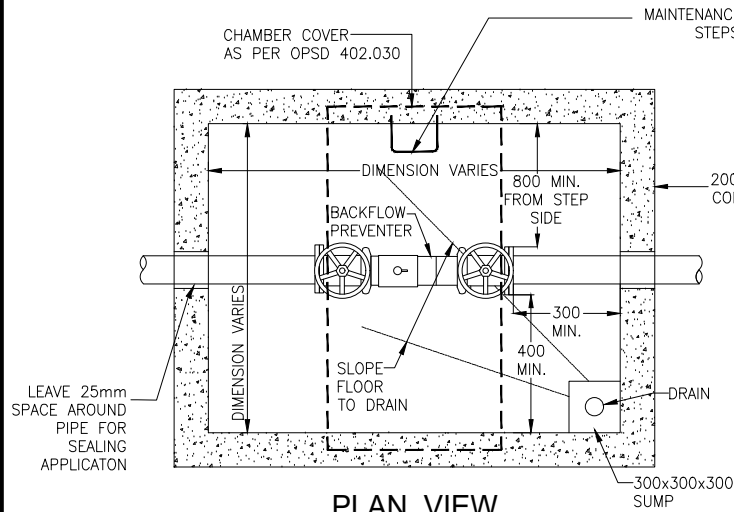

PLAN VIEW

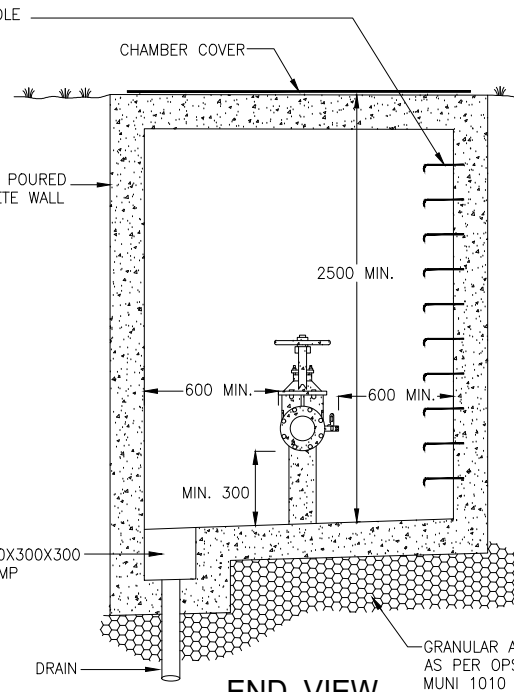


END VIEW

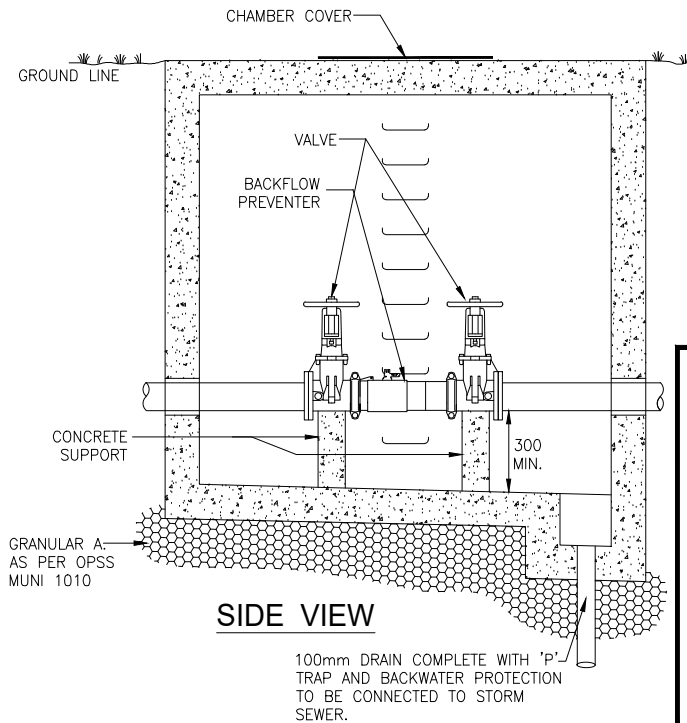

SIDE VIEW

100mm DRAIN COMPLETE WITH 'P' TRAP AND BACKWATER PROTECTION TO BE CONNECTED TO STORM SEWER.

TYPICAL INSTALLATION

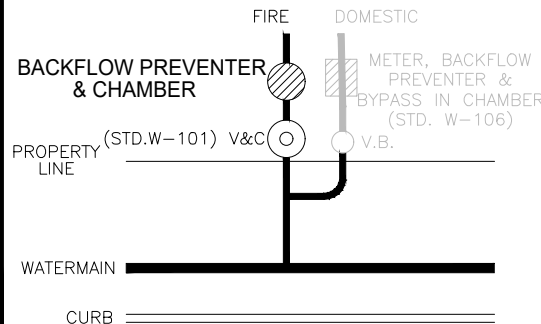

NOTES:

1. BACKFLOW DEVICE TO BE SELECTED, INSTALLED AND TESTED IN CONFORMANCE WITH CSA B64 "SELECTION + INSTALLATION OF BACKFLOW PREVENTERS AND AS PER MANUFACTURER RECOMMENDATIONS.
2. BACKFLOW DEVICE TO COMPLY WITH BY-LAW 004-2018 AS AMENDED.
3. REDUCED PRESSURE ASSEMBLY (RP) BACKFLOW PREVENTER ARE NOT PERMITTED IN BELOW GROUND APPLICATIONS.
4. BACKFLOW DEVICE TO REMAIN ACCESSIBLE AT ALL TIMES.
5. THIS DRAWING INDICATES MINIMUM CLEARANCE AND ACCESS ONLY.
6. CHAMBER TO BE OF WATER TIGHT CONSTRUCTION.
7. 100mm DIA. DRAIN COMPLETE WITH 'P' TRAP AND BACK WATER PREVENTER VALVE TO BE CONNECTED TO STORM SEWER.
8. MAINTENANCE HOLE STEPS AS PER OPSD 405.020
9. TEST COCKS ARE TO BE PROTECTED WITH WATER TIGHT PLUGS.
10. MINIMUM DEPTH OF CHAMBER = 2.5 METRES.
11. AS PER ONTARIO BUILDING CODE SECTION 7.6.2.2:
A) EVERY POTABLE WATER SYSTEM THAT SUPPLIES A FIXTURE OR TANK THAT IS NOT SUBJECT TO PRESSURE ABOVE ATMOSPHERIC SHALL BE PROTECTED AGAINST BACK-SIPHONAGE BY A BACKFLOW PREVENTER.
B) WHERE A POTABLE WATER SUPPLY IS CONNECTED TO A TANK, COOLING JACKET, LAWN SPRINKLER SYSTEM, YARD HYDRANT OR OTHER DEVICE WHERE A NON-PORTABLE FLUID MAY BE UNDER PRESSURE THAT IS ABOVE ATMOSPHERIC OR THE WATER OUTLET MAY BE SUBMERGED IN THE NON-PORTABLE FLUID, THE WATER SUPPLY SHALL BE PROTECTED AGAINST BACKFLOW BY A BACKFLOW PREVENTER.
C) WHERE A HOSE BIB IS INSTALLED OUTSIDE A BUILDING, INSIDE A GARAGE, OR WHERE THERE IS AN IDENTIFIABLE RISK OF CONTAMINATION, THE POTABLE WATER SYSTEM SHALL BE PROTECTED AGAINST BY A BACKFLOW PREVENTER.
12. WHERE PRECAST CONCRETE ADJUSTER RINGS (E.G., MODULOC) ARE REQUIRED, THEY ARE TO BE MAX. 300 mm OTHERWISE POURED COLLARS ARE TO BE USED IN CONJUNCTION WITH RINGS.
13. THIS STANDARD APPLIES TO BUILDINGS WITH OUTSIDE HYDRANTS
14. DIMENSIONS OF THE CHAMBER AND ALL INTERNAL CONNECTION SHALL BE VERIFIED BEFORE INSTALLATION.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD
BACKFLOW PREVENTER & CHAMBER
FOR 100mm THROUGH 300mm
DOUBLE CHECK VALVE ASSEMBLY

NOT TO SCALE DESIGNED: _____
REVISION: _____ DATE: DEC. 2020

STD. DWG.
W - 111

W-112 - TEMPORARY SUPPLY AND DISINFECTION CONNECTION
CURRENTLY UNDER DEVELOPMENT

Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

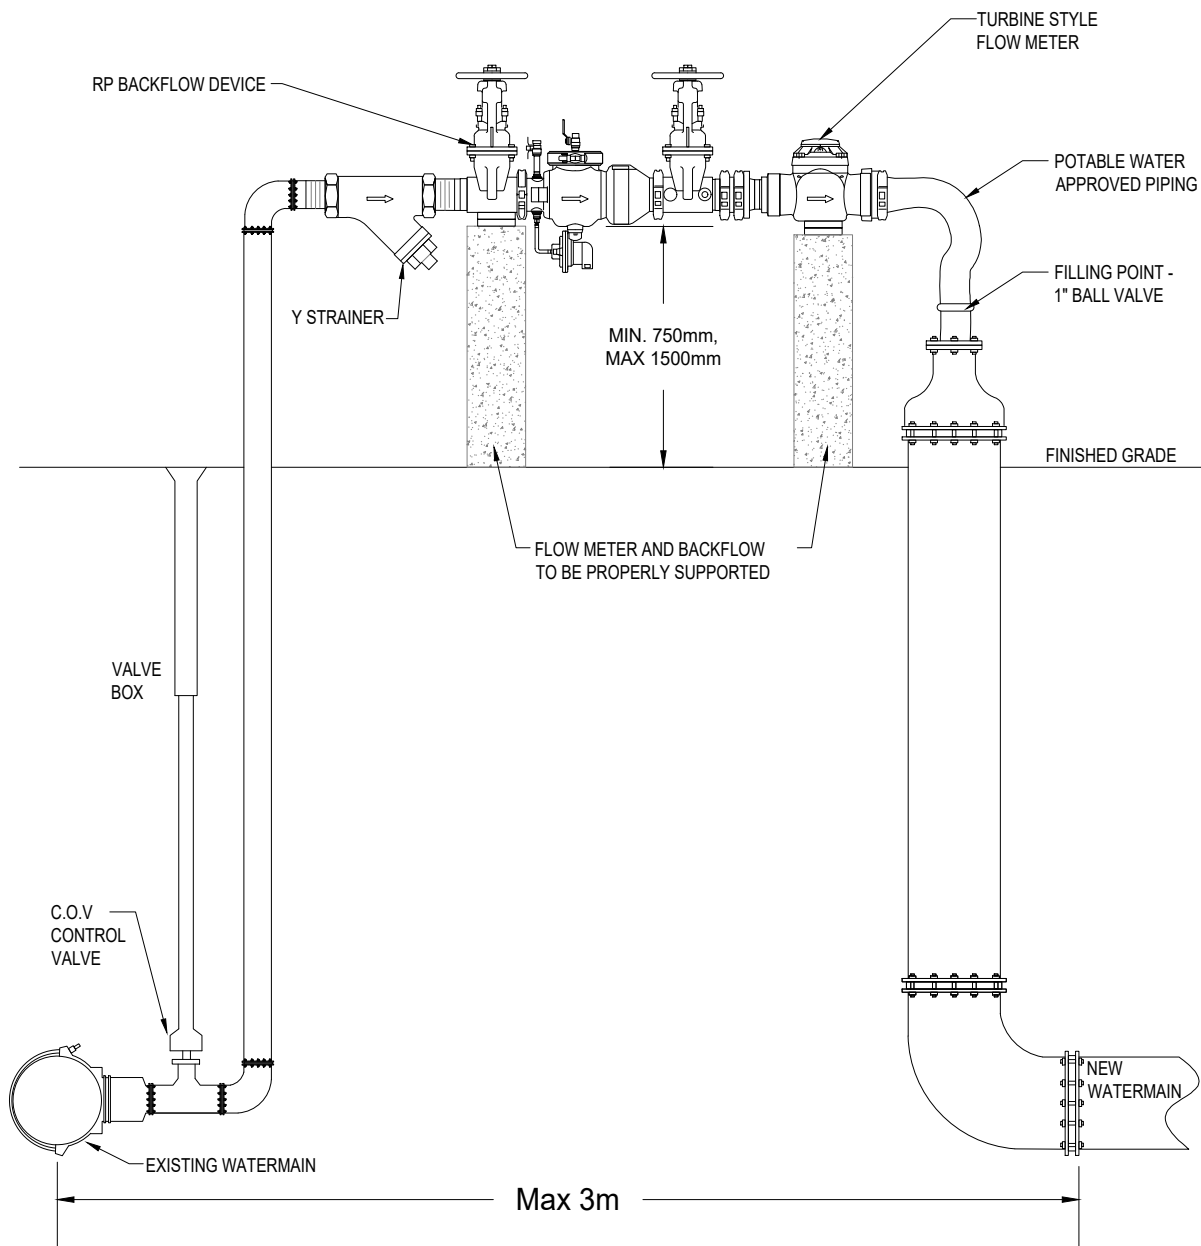

SIDE VIEW

mm

DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

CONNECTION SIZE

WATERMAIN SIZE	MIN. BYPASS SIZE
< 150mm	50mm
200mm - 400mm	100mm
> 450mm	Size to be approved by the City

NOTES:

1. BACKFLOW DEVICE MUST BE A REDUCED PRESSURE PRINCIPLE ASSEMBLY (RP) AND IN CONFORMITY WITH CSA B64.10. BACKFLOW TO BE SUPPLIED AND TESTED BY APPLICANT.
2. BACKFLOW TO BE FIELD TESTED BY A CROSS-CONNECTION CONTROL SPECIALIST WITH VALID OWWA TESTER CERTIFICATE. CITY OF VAUGHAN OPERATOR TO WITNESS ALL FIELD TESTING OF THE BACKFLOW ASSEMBLY. BACKFLOW MUST BE RE-TESTED WHEN RELOCATED, REPAIRED OR REPLACED.
3. BACKFLOW DEVICE TO BE DISCONNECTED FROM BYPASS PIPING DURING WATERMAIN PRESSURE TESTS.
4. ALL NEW PIPING AND FITTINGS TO BE DISINFECTED WITH 1-5% SODIUM HYPOCHLORITE SOLUTION ACCORDING TO AWWA C651.
5. ONLY CITY OF VAUGHAN STAFF TO OPERATE HYDRANT & MUNICIPALITY OWNED VALVES. APPLICANT/CONTRACTOR ARE NOT PERMITTED TO TURN HYDRANT ON/OFF.
6. APPLICANT/CONTRACTOR TO BE RESPONSIBLE FOR ANY DAMAGE TO CITY OF VAUGHAN AND/OR PRIVATE PROPERTY.
7. FREEZING PROTECTION MUST BE PROVIDED AND INSTALLED BY THE APPLICANT WHEN APPLICABLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

WATERMAIN BYPASS SETUP

NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: JAN. 2021

STD. DWG.
W - 113

Acad File: \\fs2\DeptShare\$\Infrastructure\Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2016\City Standards Update Folder\CoVStandardDrawings_CAD_2021\W-114--.dwg

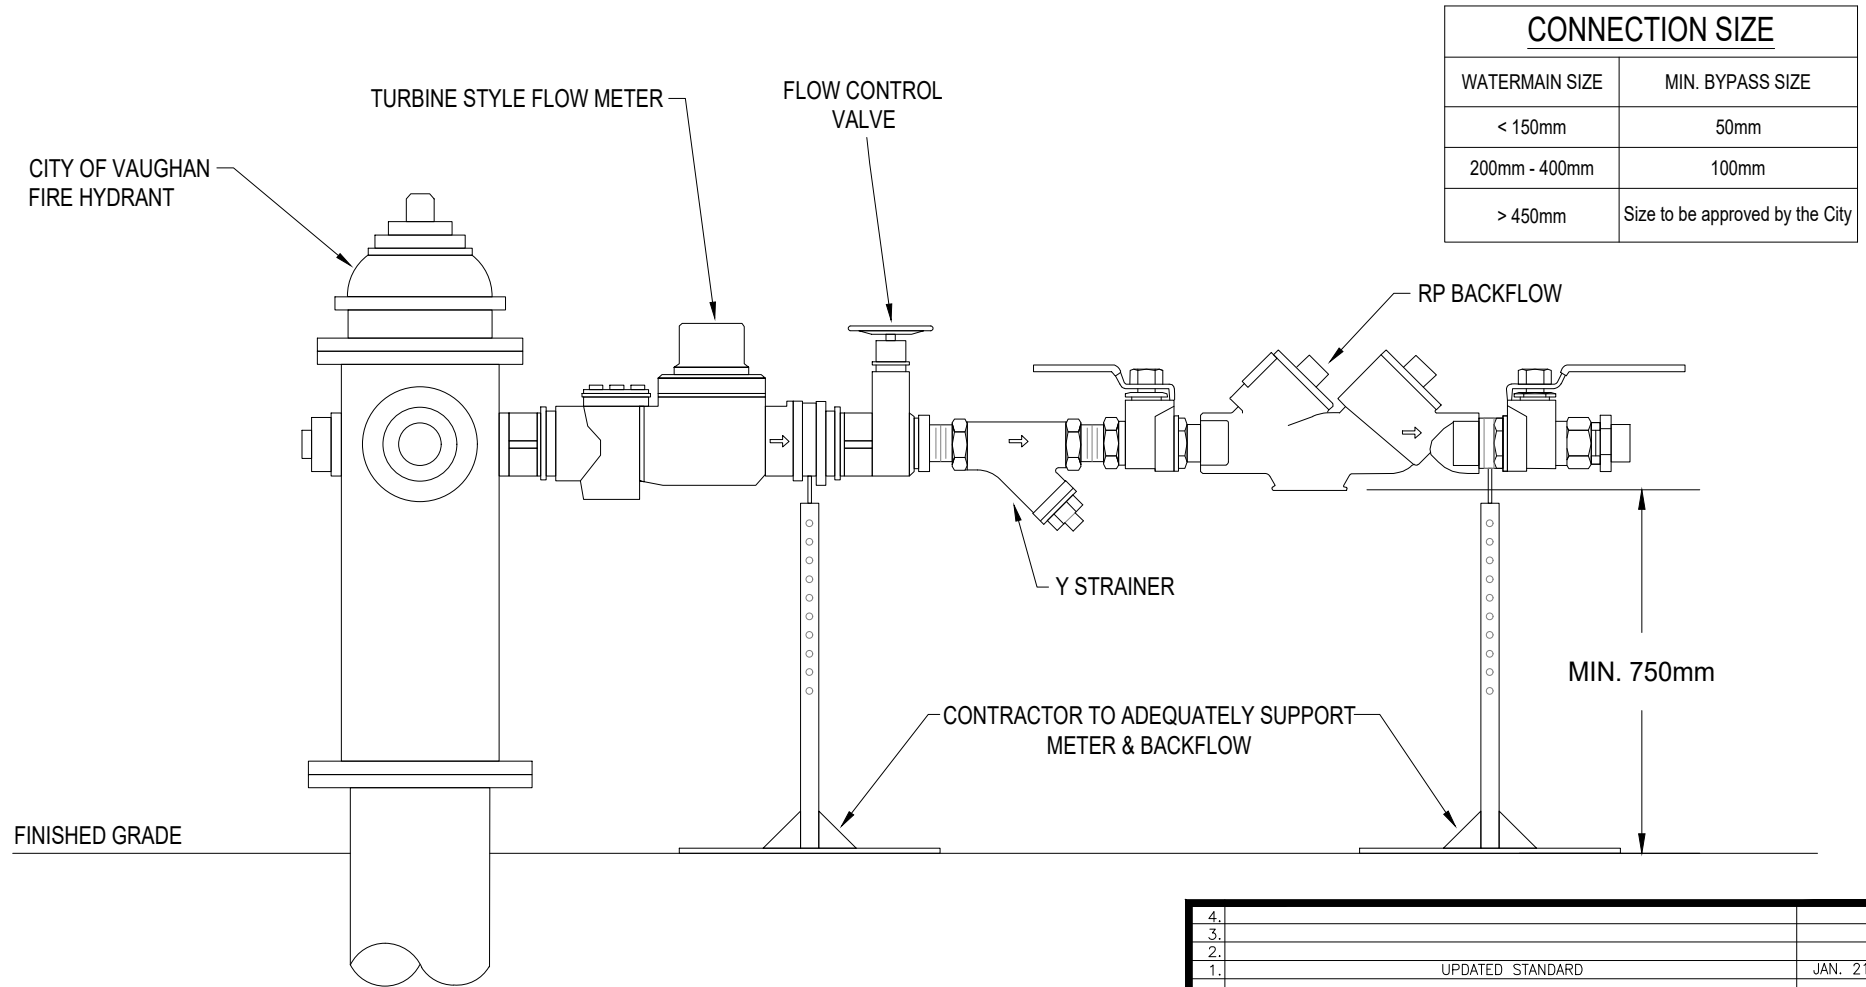

NOTES:

1. BACKFLOW DEVICE MUST BE A REDUCED PRESSURE PRINCIPLE ASSEMBLY (RP) AND IN CONFORMITY WITH CSA B64.10. BACKFLOW TO BE SUPPLIED AND TESTED BY APPLICANT.
2. BACKFLOW TO BE FIELD TESTED BY A CROSS-CONNECTION CONTROL SPECIALIST WITH VALID OWWA TESTER CERTIFICATE. CITY OF VAUGHAN OPERATOR TO WITNESS ALL FIELD TESTING OF THE BACKFLOW ASSEMBLY. BACKFLOW MUST BE RE-TESTED WHEN RELOCATED, REPAIRED OR REPLACED.
3. BACKFLOW DEVICE TO BE DISCONNECTED FROM BYPASS PIPING DURING WATERMAIN PRESSURE TESTS.
4. ONLY CITY OF VAUGHAN STAFF TO OPERATE HYDRANT & MUNICIPALITY OWNED VALVES. APPLICANT/CONTRACTOR ARE NOT PERMITTED TO TURN HYDRANT ON/OFF.
5. APPLICANT/CONTRACTOR TO BE RESPONSIBLE FOR ANY DAMAGE TO CITY OF VAUGHAN AND/OR PRIVATE PROPERTY.
6. FREEZING PROTECTION MUST ME PROVIDED AND INSTALLED BY THE APPLICANT WHEN APPLICABLE.

mm

**DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED**

4.		
3.		
2.		
1.	UPDATED STANDARD	JAN. 21
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

**FIRE HYDRANT CONNECTION WITH
METER AND BACK FLOW PREVENTER**

NOT TO SCALE
DESIGNED: DEPT. ENG.
REVISION: 01 DATE: JAN. 2021

STD. DWG.
W - 114

W-115 – GROUNDWATER FLOW MEASURING DEVICE PIPING LAYOUT CURRENTLY UNDER DEVELOPMENT


Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at
developmentengineering@vaughan.ca

W-116 – GROUNDWATER SAMPLING ACCESS POINT WITH
MAINTENANCE ACCESS HOLE
CURRENTLY UNDER DEVELOPMENT


Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at
developmentengineering@vaughan.ca

W-117 – GROUNDWATER SAMPLING ACCESS POINT CURRENTLY UNDER DEVELOPMENT


Refer to 2004 Published Edition. Should drawing not be available, please contact the Development Engineering Department at developmentengineering@vaughan.ca

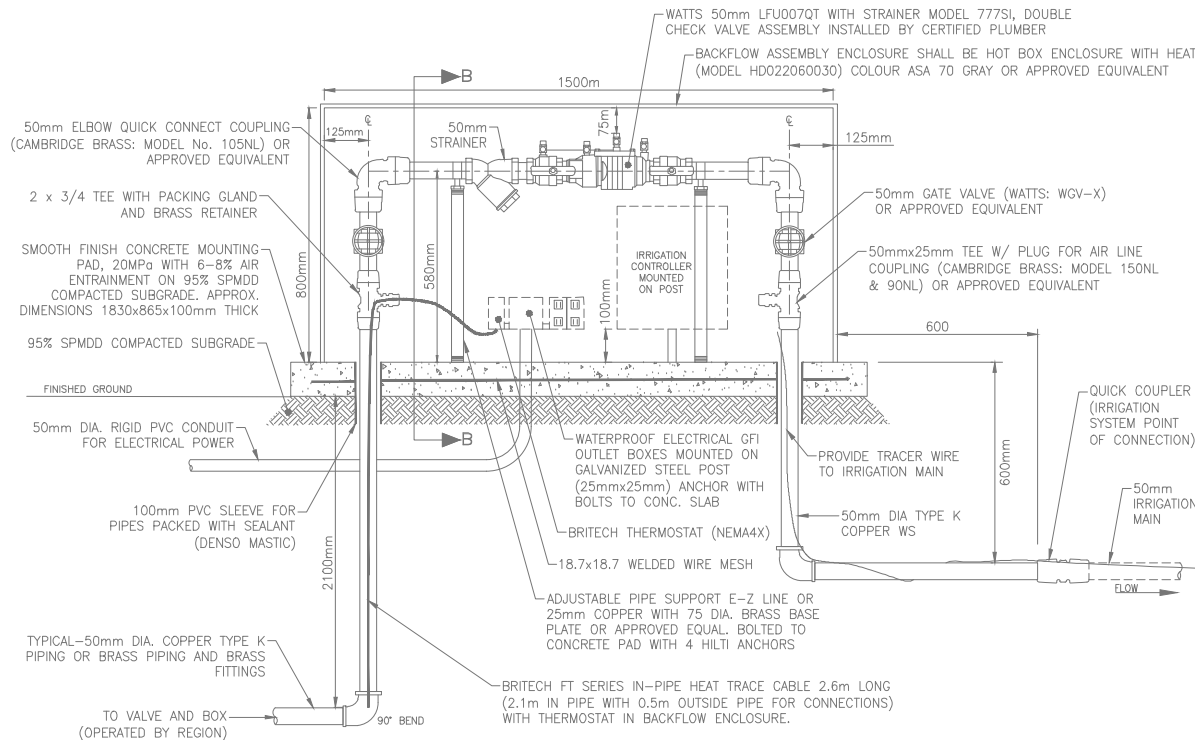

BACKFLOW PROTECTION ASSEMBLY
OWNED BY YORK REGION

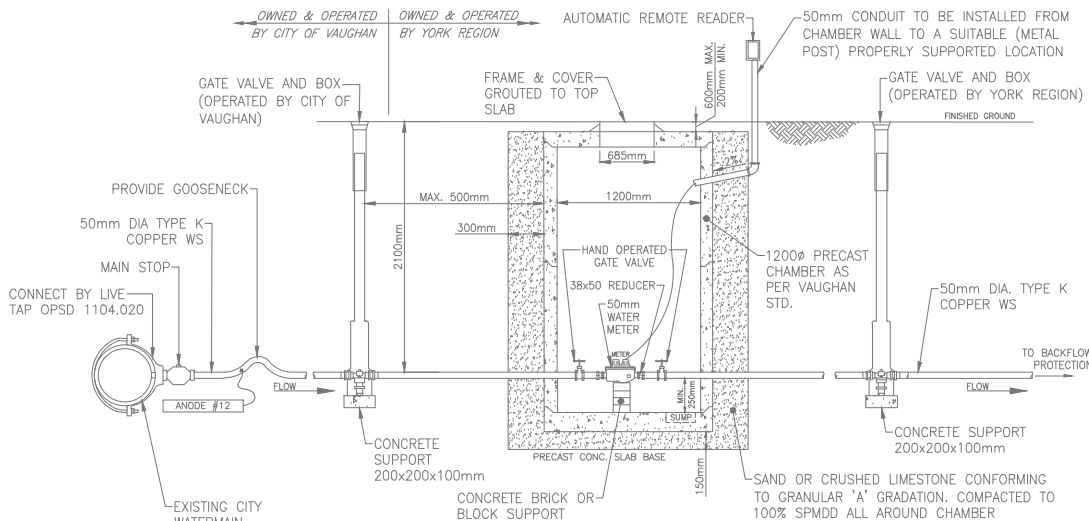

WATER METER CHAMBER ARRANGEMENT
OWNED BY YORK REGION

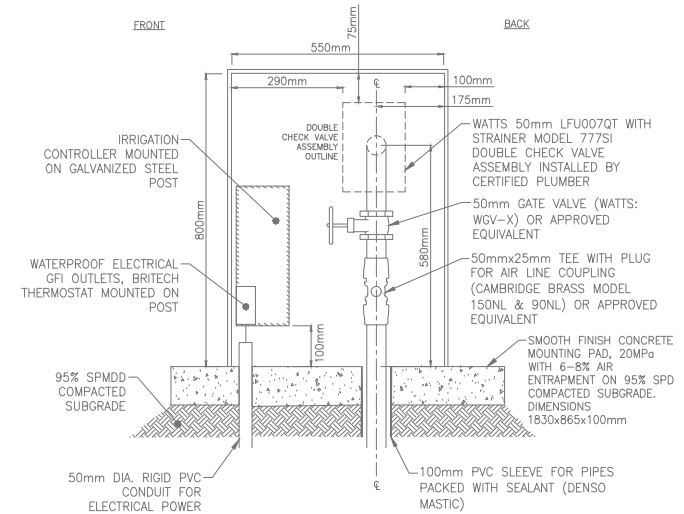

SECTION 'B - B'
BACKFLOW PROTECTION ASSEMBLY

NOTES

- 24LB ANODE COVERING AN AREA OF 150 LINEAR FEET TO BE INSTALLED FOR SERVICE PROTECTION, MIDPOINT ON LENGTH OF PIPE FROM WM TO CITY'S GATE VALVE.
- SERVICE TO BE TURNED ON AND PRESSURE TESTED PRIOR TO BACKFILLING.

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

5.		
4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD
AUTOMATED IRRIGATION SYSTEM
FOR YORK REGION LANDSCAPE MEDIANS


NOT TO SCALE
DESIGNED: _____
REVISION: _____
DATE: _____ DEC. 2022

STD. DWG.
W-118

FILE: Q:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Update Folder\CoStandardDrawings_CAD_2021\C-101 - Residential Service Connections.dwg

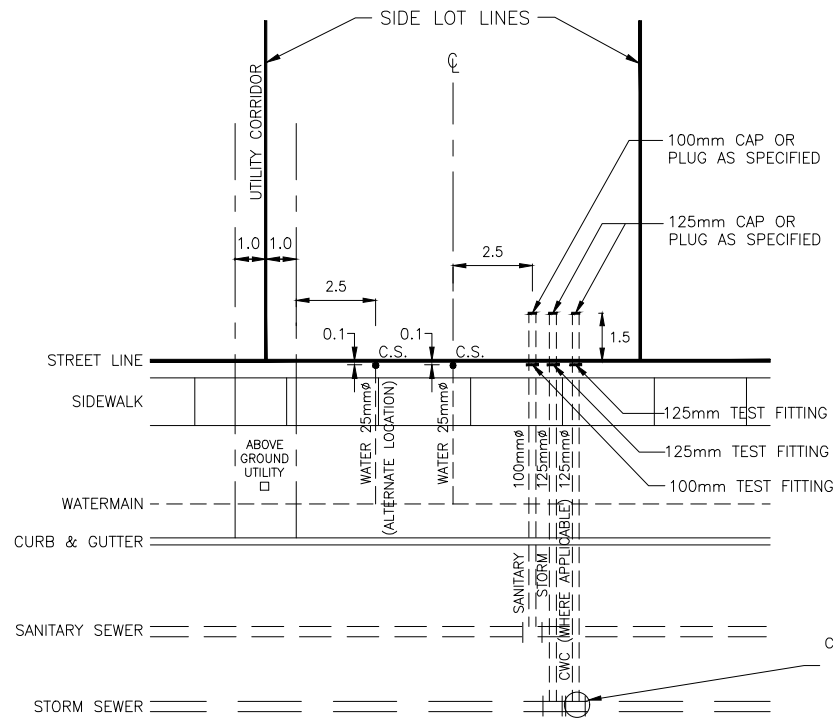

SINGLE SEWER & SINGLE WATER SERVICE

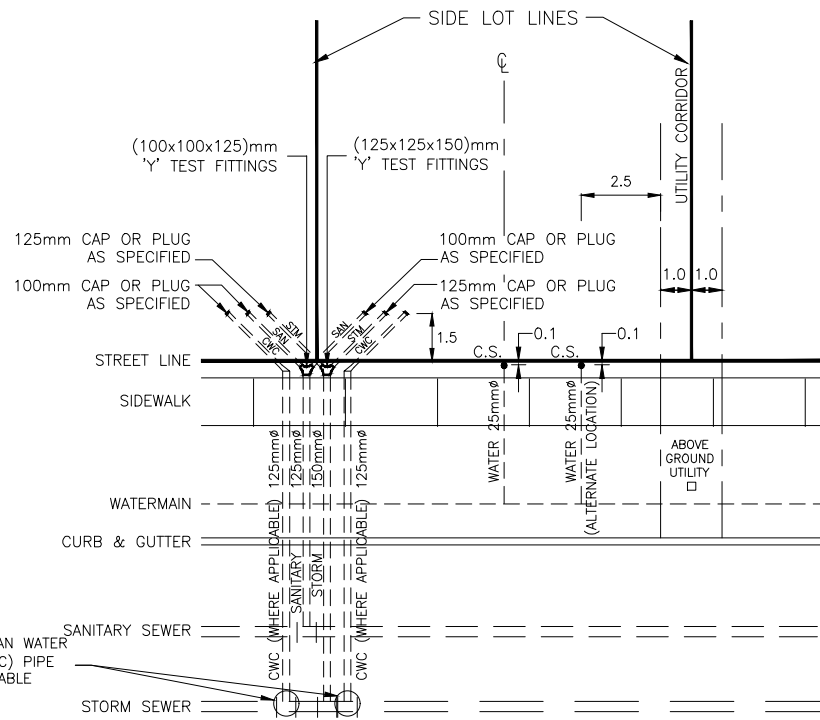

SINGLE WATER & DOUBLE SEWER SERVICE

NOTES

1. RESIDENTIAL DWELLING SHALL BE SERVICED WITH A MINIMUM 25mm (1") WATER SERVICE CONNECTION. DWELLING STRUCTURES THAT HAVE SPRINKLER SYSTEM AND/OR HIGH HYDRAULIC LOADS AND REQUIRE WATER SERVICE CONNECTION LARGER THAN 25mm (1") SHALL BE SUBJECT TO THE CITY'S APPROVAL.
2. WATER SERVICE CONNECTIONS AND CURB STOPS SHALL BE AS DETAILED ON O.P.S.D. 1104.010 OR 1104.020.
3. SANITARY AND STORM SERVICE CONNECTIONS SHALL BE AS PER O.P.S.D. 1006.010 OR 1006.020 EXCEPT THAT THE CONNECTIONS SHALL EXTEND 1.5m BEYOND THE PROPERTY LINE AND SHALL BE PLUGGED OR CAPPED AT THAT POINT.
4. ALL PVC SANITARY LATERAL PIPE SHALL BE GREEN IN COLOUR.
5. SANITARY TEST FITTINGS SHALL BE LETTERED 'SAN'. FITTINGS AND PLUGS SHALL BE AS PER CITY REQUIREMENTS.
6. ALL PVC STORM LATERAL PIPE SHALL BE WHITE IN COLOUR.
7. STORM TEST FITTING SHALL BE LETTERED 'STM'. FITTINGS AND PLUGS SHALL BE AS PER CITY REQUIREMENTS.
8. MARKERS SHALL BE PLACED AT ENDS OF 'SAN' AND 'STM' CONNECTIONS.
9. WATER SERVICE CURB STOP SHALL BE LOCATED IN THE GRASSED AREA OF THE R.O.W. ANY OTHER LOCATION SHALL BE SUBJECT TO THE CITY'S APPROVAL.
10. CWC SERVICE WITHIN LOT NOT TO BE INSTALLED UNTIL ROOF LEADERS ARE INSTALLED.
11. HOUSE ROOF LEADERS TO DISCHARGE A MINIMUM OF 1.5m FROM ALL BUILDINGS TO GROUND SURFACE BY MEANS OF A SPLASH PAD WHERE CWC ARE NOT AVAILABLE.

LEGEND

CWC - CLEAN WATER COLLECTOR

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

RESIDENTIAL SERVICE CONNECTIONS


NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: DEC. 2020

STD. DWG.

C - 101

FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards Drawings_CAD_2021\C-102 - Block Service Connections.dwg

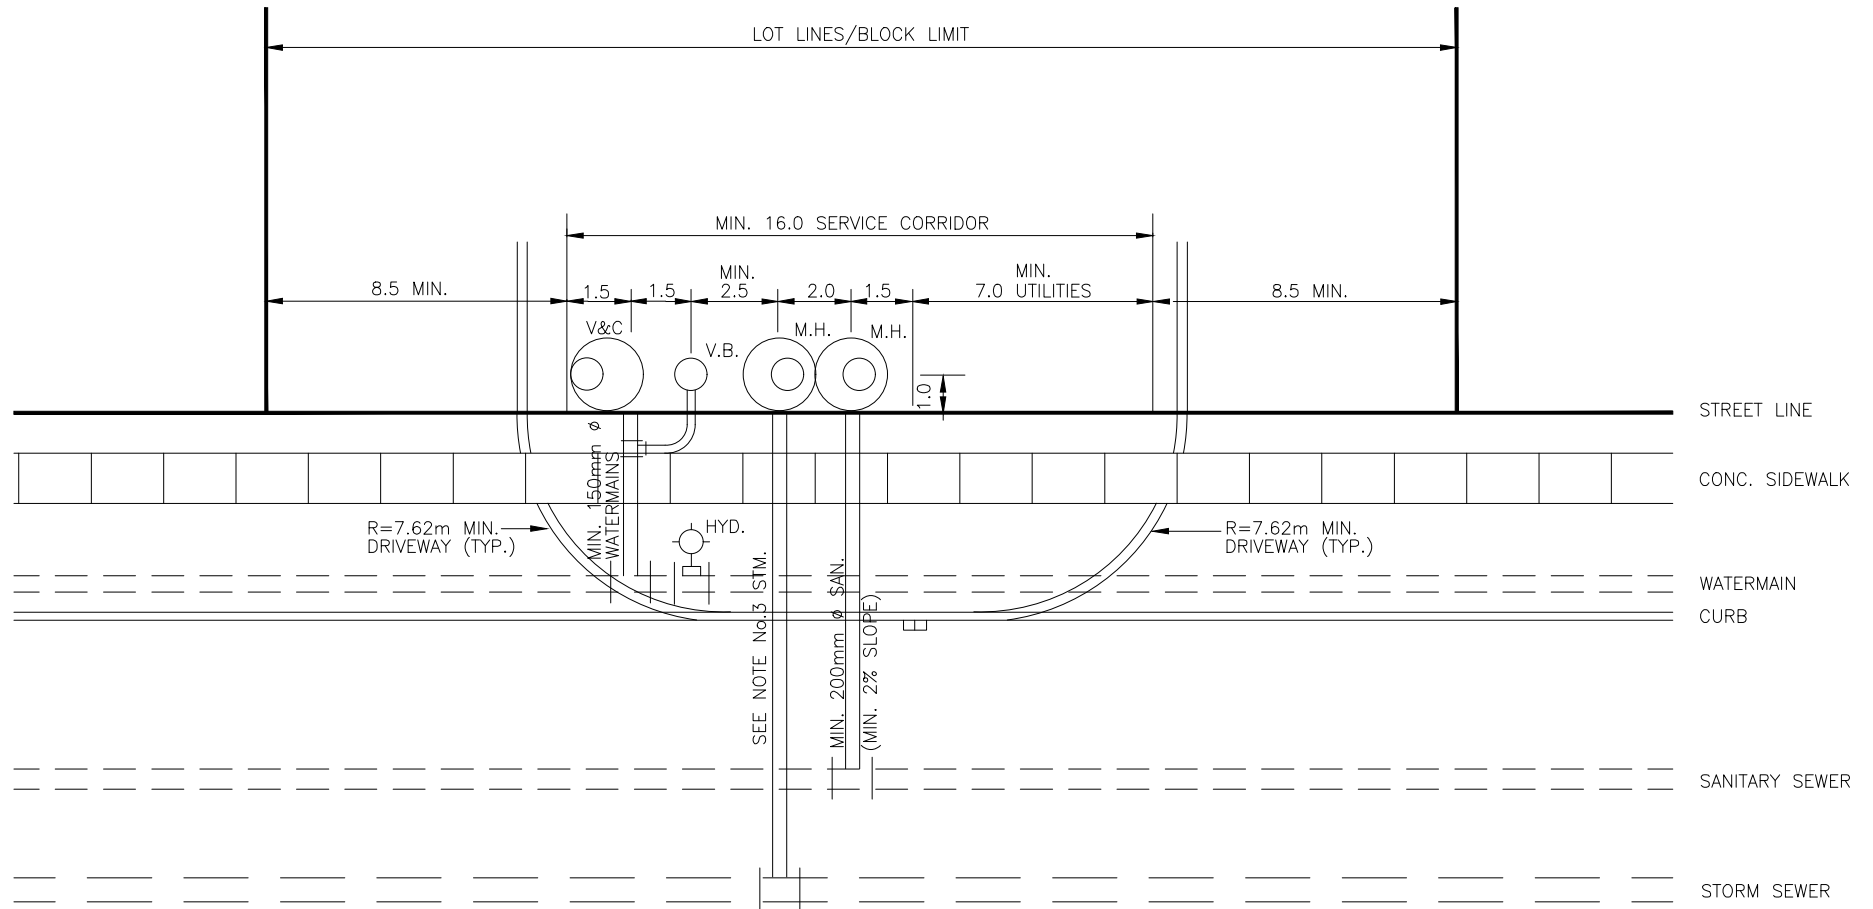

NOTES

1. ABOVE GROUND UTILITIES TO BE LOCATED MINIMUM 1.0m FROM CURBS, SIDEWALK AND DRIVEWAYS.
2. MAINTENANCE HOLES AND VALVE CHAMBERS FOR SERVICE CONNECTIONS TO BE LOCATED AT 1.0m OFF STREET LINE ON PRIVATE PROPERTY.
3. STORM SEWER CONNECTIONS SHALL BE SIZED BASED UPON STORM WATER MANAGEMENT REQUIREMENTS. SEE STD. C-104.
4. WATER SERVICE CONNECTIONS SHALL BE AS DETAILED ON STANDARD DRAWING C-103.
5. CB TO BE LOCATED WITHIN SERVICE CORRIDOR.

m DIMENSIONS IN METRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

BLOCK SERVICE CONNECTIONS

NOT TO SCALE
DESIGNED: _____
REVISION: _____
DATE: DEC. 2020

STD. DWG.
C - 102

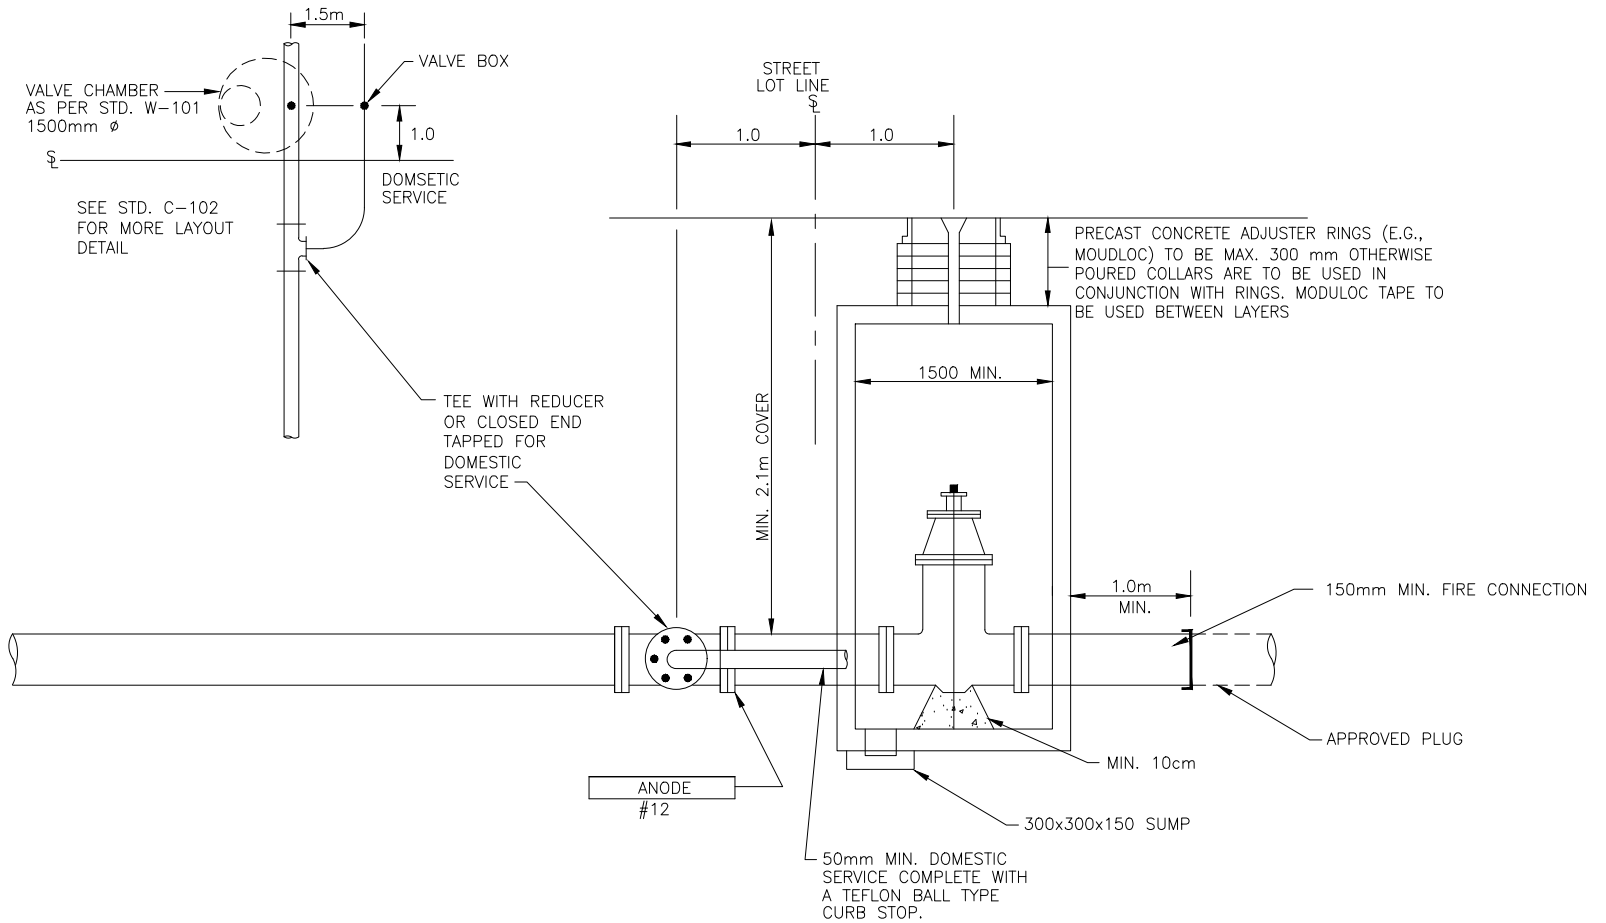

NOTES

1. BOND BREAKER TO BE USED BETWEEN ALL CONCRETE AND FITTINGS.
2. PROVIDE RESTRAINED MECHANICAL JOINTS OR SLIP-ON JOINTS WITH TIE RODS & CLAMPS AS REQUIRED.
3. THRUST BLOCKS SHALL NOT BE USED WITHIN VALVE CHAMBER.
4. THRUST BLOCKS SHALL NOT BE USED ON PVC WATERMAINS.



DIMENSIONS IN METRES
EXCEPT AS NOTED

4.	
3.	
2.	
1.	
REVISIONS	
DATE	



CITY OF VAUGHAN ENGINEERING STANDARD

BLOCK WATER CONNECTION

NOT TO SCALE


DESIGNED: _____

REVISION: _____

DATE: DEC. 2020

STD. DWG.

C - 103

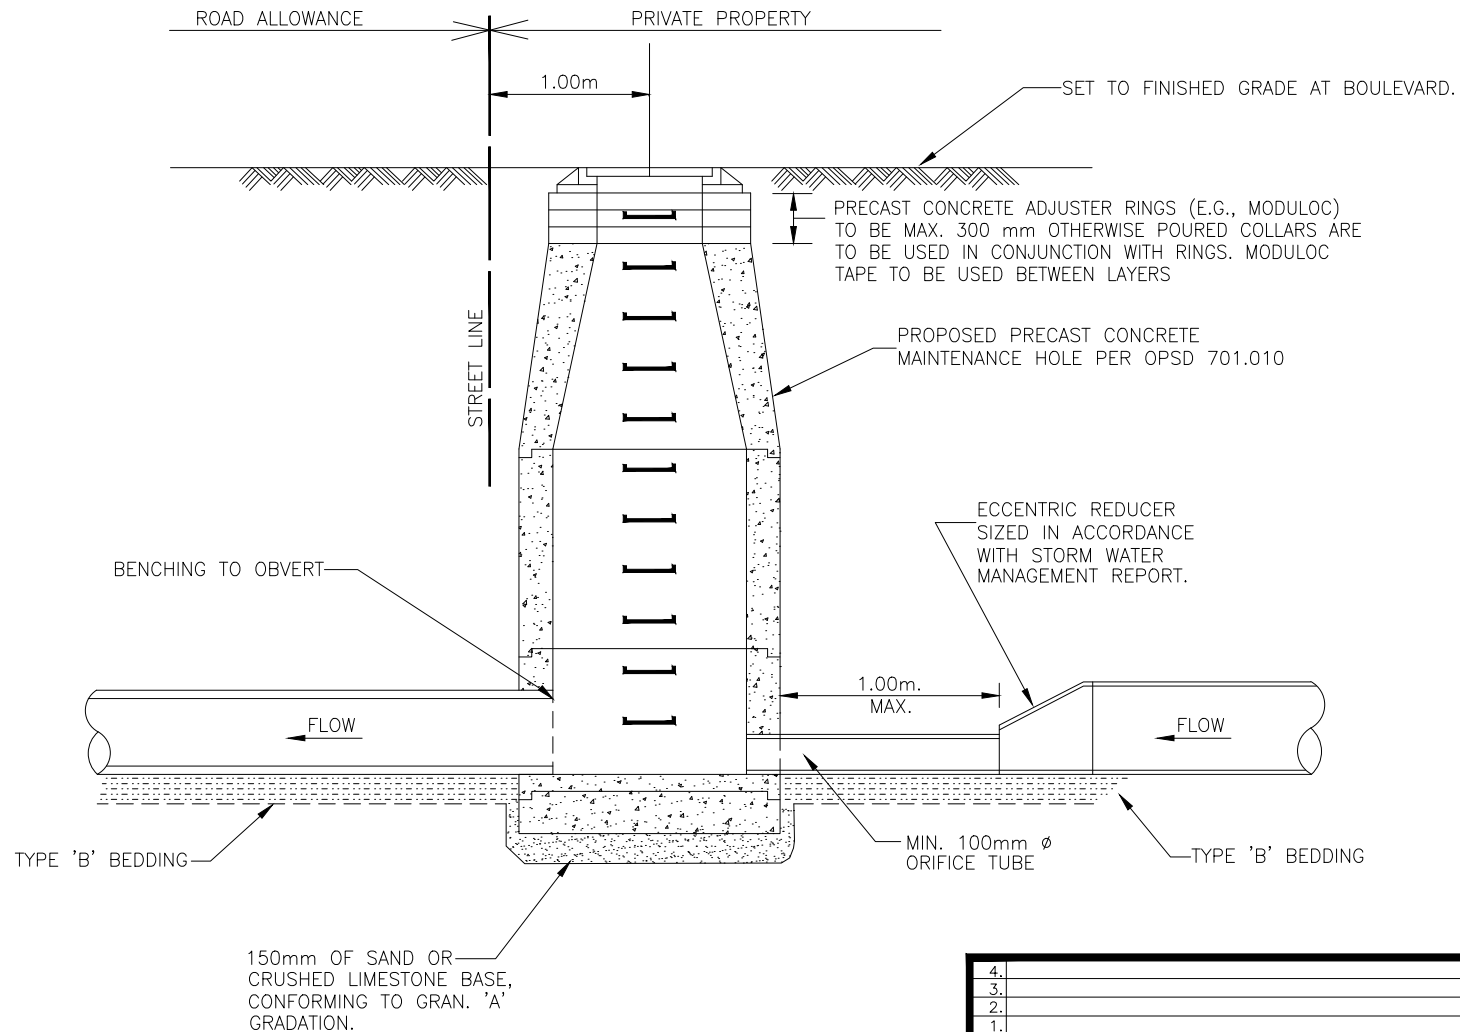

NOTE

- CAST IRON INTEGRATED FRAMES ARE ACCEPTABLE

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

STORM CONNECTIONS WITH ORIFICE CONTROL


NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: DEC. 2020

STD. DWG.

C - 104

m DIMENSIONS IN METRES
EXCEPT AS NOTED

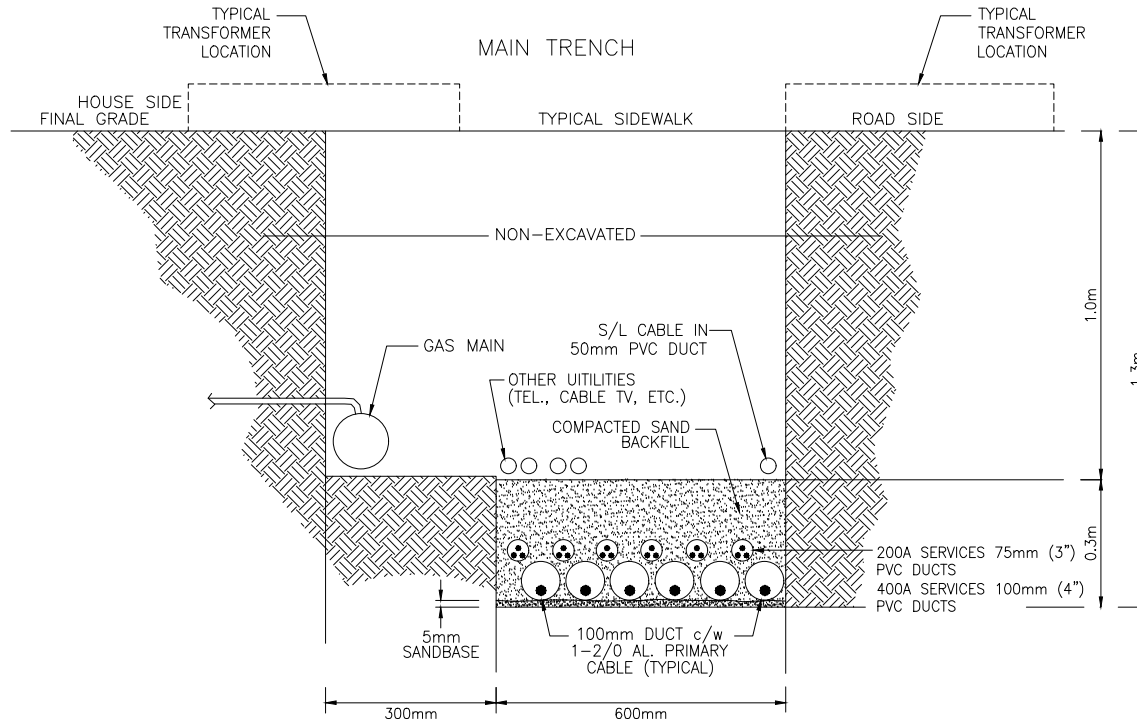

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTES:

1. 100mm P.V.C. TYPE II DUCT REQUIRED UNDER PAVED AREAS.
CAPACITY PER DUCT:
A) 1-PRIMARY CABLE - 100mm (4")
B) 2-SECONDARY CABLES [200A-75mm(3") /400A-100mm (4")]
2. 1 SPARE DUCT IS REQUIRED AT EACH CROSSING - 100mm (4")
3. INSTALL PATIO SLABS AT ALL HYDRANT & V.C. LOCATIONS

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

STANDARD TRENCH FOR DIRECT BURIED CABLES

NOT TO SCALE
DESIGNED: _____
REVISION: _____ DATE: 2022

STD. DWG.
SL - 100a

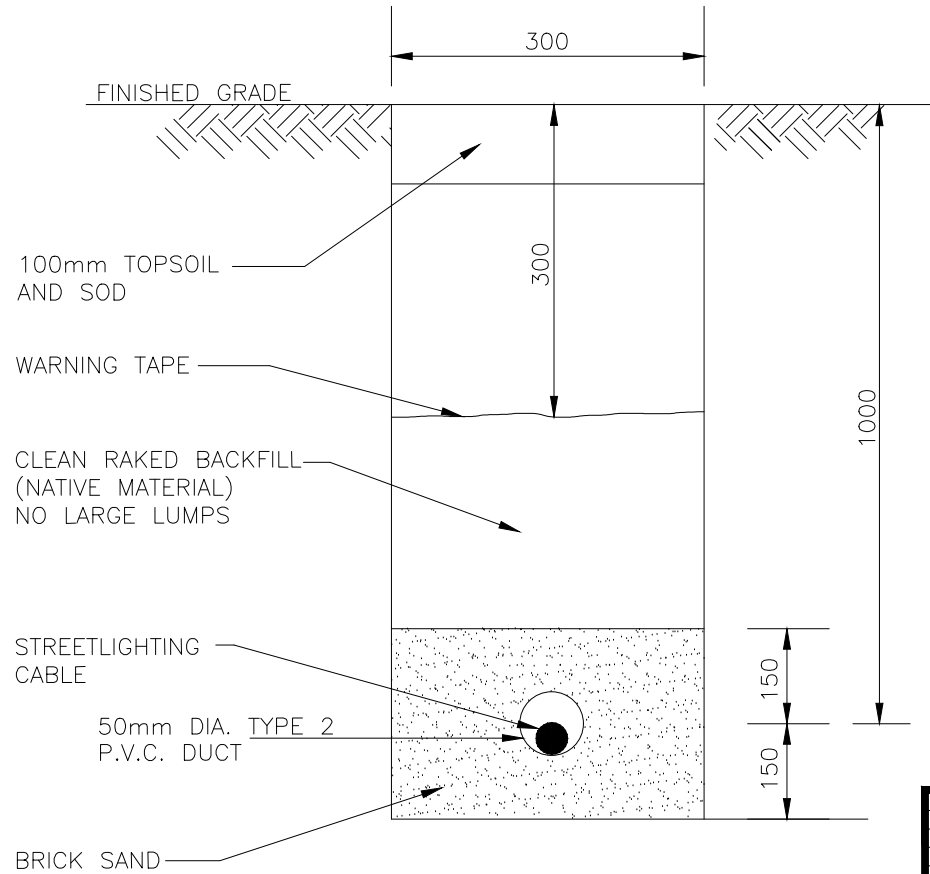

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

STANDARD STREETLIGHTING TRENCH


NOT TO SCALE

DESIGNED: _____

REVISION: _____


DATE: _____ 2022

STD. DWG.
SL - 100b

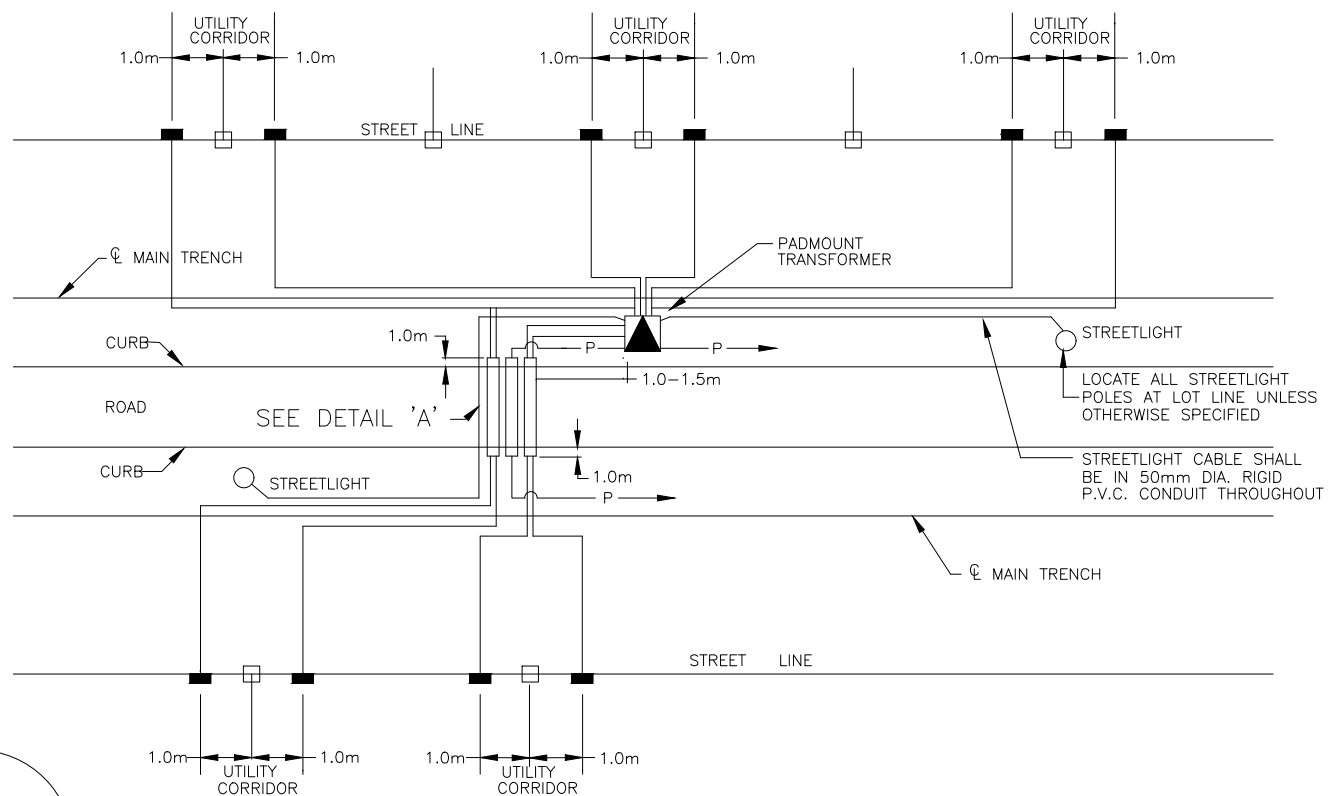

DETAIL 'A'

TYPICAL DUCT ARRANGEMENT
FOR DIRECT BURIED ROAD
CROSSING DUCTS

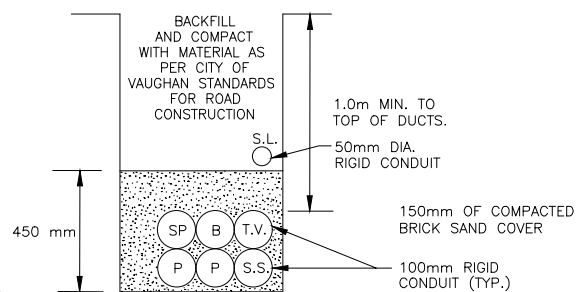

DUCTS

- B - BELL CABLE
T.V. - CABLE TELEVISION
P - PRIMARY CABLE (1-PER DUCT)
S.S. - SECONDARY SERVICE (MAX. -2 RUNS PER DUCT)
S.L. - STREETLIGHT CABLE CONDUIT
SP - SPARE CONDUIT

4.		
3.		
2.		
1.		
	REVISIONS	DATE

REVISIONS

DATE _____



CITY OF VAUGHAN ENGINEERING STANDARD

INSTALLATION OF STREETLIGHT CABLE AT ROAD CROSSINGS

NOT TO SCALE

DESIGNED: _____

REVISION: _____

DATE: _____ 2022

STD. DWG.

SL - 101

c:\Users\cudmap\OneDrive - City of Vaughan\ - PC SHARE\ - Map Req/2022\ - Req. - Other/Eric M\SL - Standardizing Standards\STREETLIGHT STANDARDS - NEW\102 - Streetlight Wiring Connections.dwg

-
- Diagram illustrating the electrical connections for a streetlight pedestal feed, showing the path from the ground to the luminaire.
- Legend:**
- #6 (HOT)
 - #6 (NEUTRAL)
 - - - BARE Cu. (GROUND)
- Labels:**
- TO LUMINAIRE
 - STREETLIGHT POLE
 - HAND WELL
 - FUSE
 - SPLIT BOLT CONNECTORS
 - GROUND TERMINAL FOR STREETLIGHT POLE
 - GRADE
 - B
 - W
- Connections:**
- The #6 (HOT) line connects to the #12 B (HOT) line.
 - The #6 (NEUTRAL) line connects to the #12 W (NEUTRAL) line.
 - The BARE Cu. (GROUND) line connects to the #12 LUMINAIRE GROUND line.
 - The #12 B (HOT) line passes through a FUSE.
 - The #12 W (NEUTRAL) line and #12 LUMINAIRE GROUND line are connected via SPLIT BOLT CONNECTORS to the HAND WELL.
 - The HAND WELL is connected to the GROUND TERMINAL FOR STREETLIGHT POLE.

NOTES:


- NOTES

-
- Diagram illustrating the wiring connections for a streetlight system, showing the connection to the luminaire, ground, and grade.
- Legend:**
- #6 (HOT)
 - #6 (HOT)
 - - BARE Cu. (GROUND)
- Labels and Connections:**
- TO LUMINAIRE:** Indicated at the top of the diagram.
 - STREETLIGHT POLE:** Indicated on the right side of the diagram.
 - HAND WELL:** Indicated on the right side of the diagram.
 - GROUND TERMINAL FOR STREETLIGHT POLE:** Indicated on the right side of the diagram.
 - Wiring Labels:**
 - #12 B (HOT)
 - #12 W (HOT)
 - #14 LUMINAIRE GROUND
 - #6 (HOT)
 - #6 (HOT)
 - BARE Cu. (GROUND)
 - Grade:** Indicated at the bottom of the diagram.
 - Components:**
 - FUSE:** Located in the top left of the hand well.
 - SPLIT BOLT CONNECTORS:** Located in the bottom left of the hand well.

240V STREETLIGHT CONNECTION

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
STREETLIGHT WIRING CONNECTIONS		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL - 102
REVISION: _____	DATE: <u>2022</u>	

Acad File: C:\Users\vaughan\OneDrive - City of Vaughan\ - PP - Reg - Consult\Boum\ - Reg - Other\City MSL - Standardizing Standards\STREETLIGHT STANDARD - NPA\SL-103.dwg

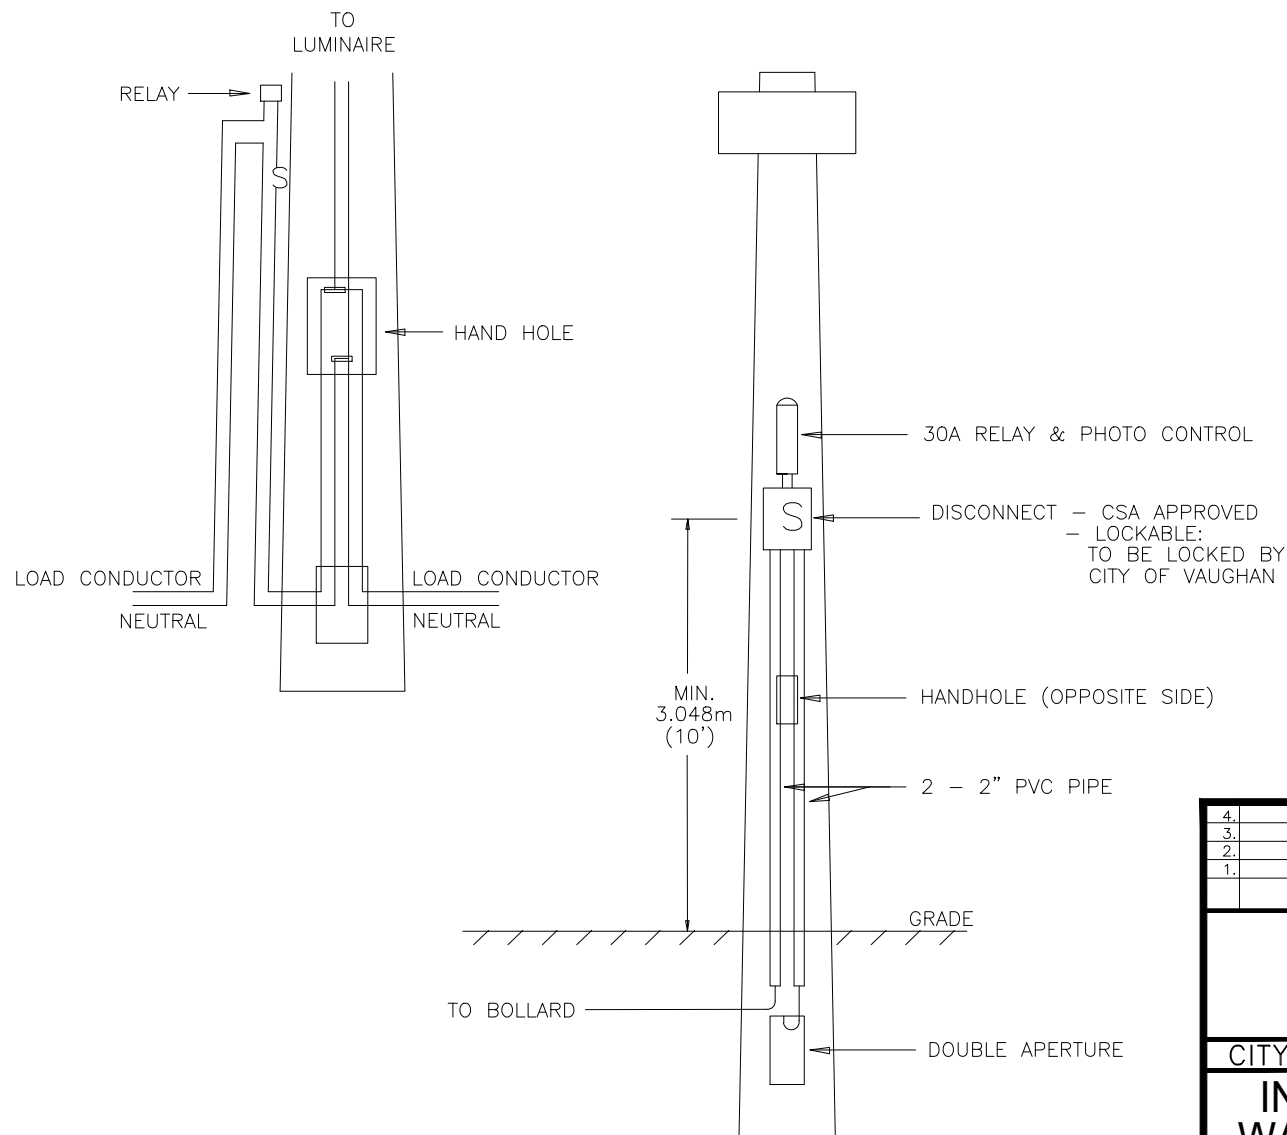

NOTES

1. INSTALL EQUIPMENT ON OPPOSITE SIDE TO HANDHOLE.
2. CONTRACTOR TO LEAVE ENOUGH CONDUCTOR TO MAKE CONNECTIONS.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

INSTALLATION OF BOLLARD WALKWAY LIGHT SERVICE AT STREETLIGHT POLE

NOT TO SCALE

DESIGNED: _____


REVISION: _____

DATE: 2022


STD. DWG.

SL - 103


ELECTRICAL SAFETY AUTHORITY WILL INSPECT
THE SUPPLY PEDESTAL, STREET LIGHTS AND
INSTALLATION OF CABLES IN THE MAIN TRENCH.

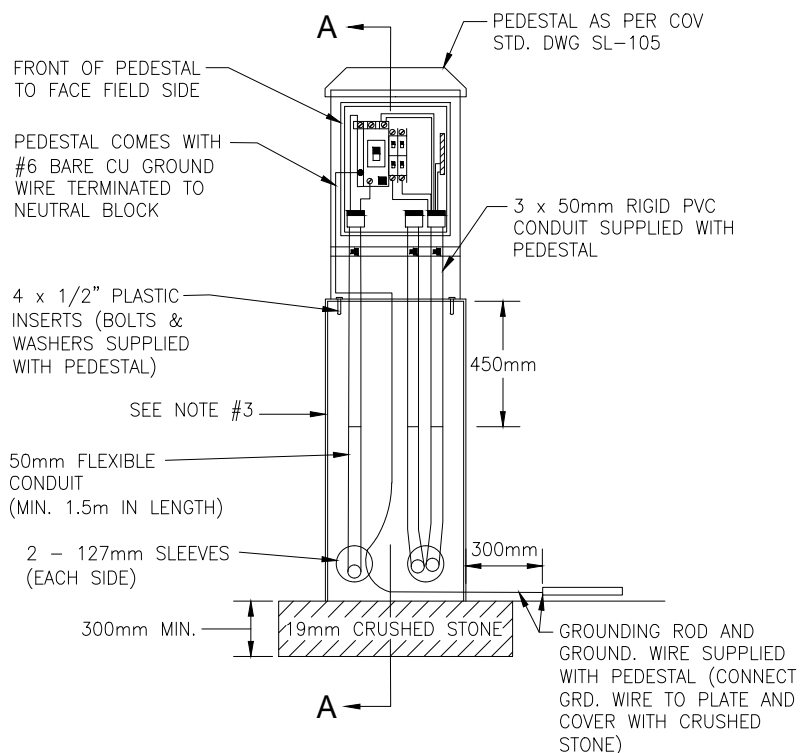

FRONT ELEVATION

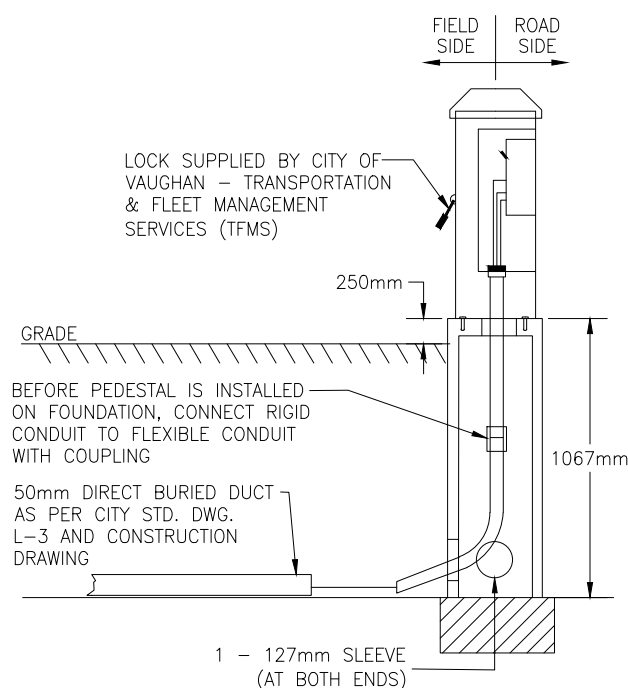

SECTION 'A - A'

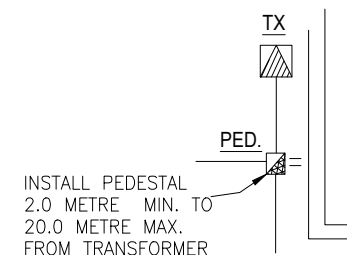

TYPICAL PLAN LAYOUT

NOTES

1. REMOVE ALL LOOSE MATERIAL FROM THE FLOOR OF THE EXCAVATION AND FILL TO FINISHED GRADE OF BEDDING WITH 300mm OF 19mm CRUSHED STONE THOROUGHLY COMPACTED.
2. BACKFILL THE AREA WITH CLEAN EARTH, SAND OR PEA GRAVEL IN THOROUGHLY COMPACTED LAYERS AROUND PERIMETER OF FOUNDATION.
3. CONCRETE FOUNDATION TO BE POURED OR PRECAST AS MANUFACTURED BY BROOKLIN CONCRETE PRODUCTS, PEDESTAL SOLUTIONS INC. OR EQUIVALENT.
4. SUPPLY CABLE FROM TRANSFORMER TO PEDESTAL AND FROM PEDESTAL TO STREET LIGHTS IS #6CU RWU90, XLPE, 600V, CSA APPROVED CABLE.


4.		
3.		
2.		
1.		
REVISIONS		DATE


VAUGHAN


CITY OF VAUGHAN ENGINEERING STANDARD

STREETLIGHT PEDESTAL BASE DETAIL


NOT TO SCALE	DESIGNED: _____	STD. DWG. SL - 104
REVISION: _____	DATE: <u>2022</u>	

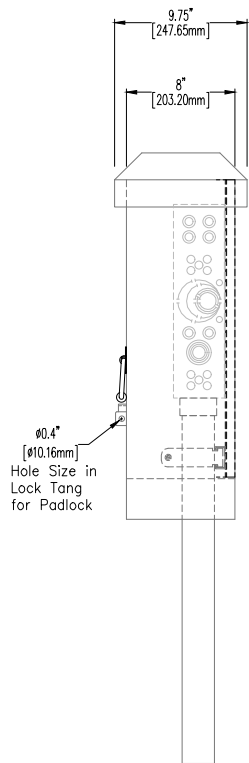

RIGHT SIDE ELEVATION

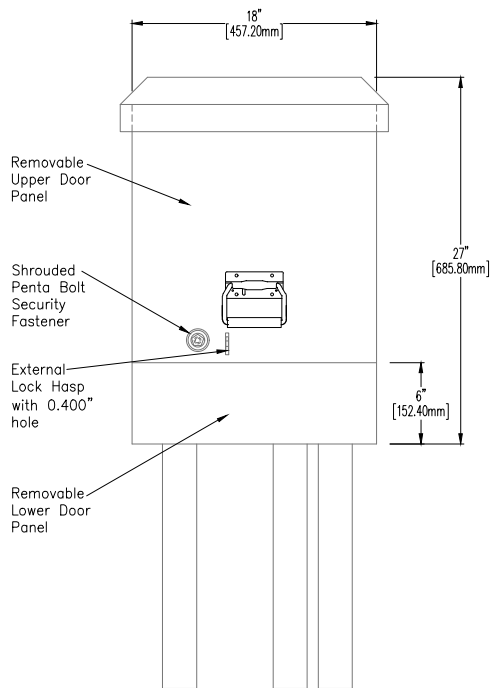


FRONT ELEVATION
WITH FRONT DOOR PANELS

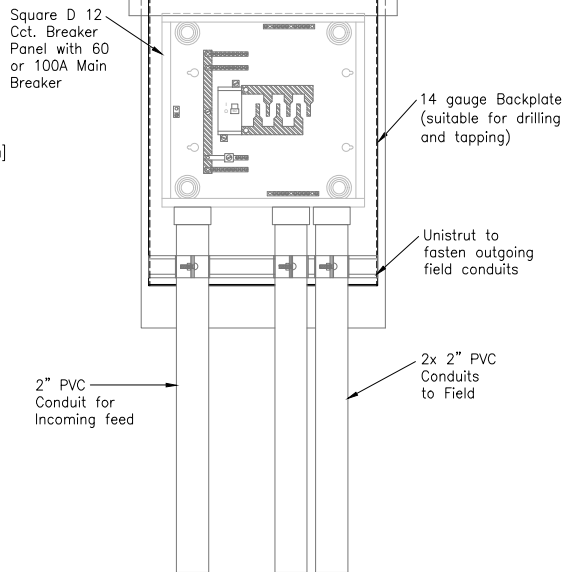


FRONT ELEVATION
FRONT DOOR PANELS REMOVED

ORDER INFORMATION		
ITEM:	AMPS	QUANTITY
MAIN BREAKER SIZE		1
SINGLE POLE BREAKER		
2 POLE BREAKER		



LOWER PANEL
(showing Pentabolt Assy and Lock Hasp)

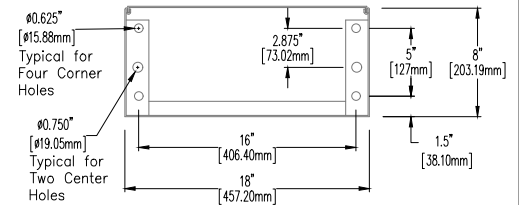

BASE PLATE MOUNTING DIMENSIONS

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

STREETLIGHT PEDESTAL DETAIL

NOT TO SCALE

DESIGNED: _____

REVISION: _____ DATE: _____ 2022

DATE: _____ 2022

STD. DWG.

SL - 105

NOTES

1. PEDESTAL TO BE SUPPLIED WITH PENTA BOLT UNFASTENED.
2. PEDESTAL TO BE SUPPLIED WITHOUT A PENTA BOLT SOCKET WRENCH.
3. CITY OF VAUGHN SHALL SECURE THE PENTA BOLT ON PROJECT COMPLETION AND STREET LIGHTING ASSUMPTIONS BY THE CITY.

FRONT ELEVATION

WITH LOCKING COVER
PLATE REMOVED

FRONT ELEVATION
WITH LOCKING COVER IN PLACE

SIDE ELEVATION
WITH LOCKING COVER IN PLACE

4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

POLE HAND HOLE BREAKER SL2-15

NOT TO SCALE

DESIGNED: _____

REVISION: _____

DATE: 2022

STD. DWG.

SL - 107

MATERIAL NOTES:

1. ENCLOSURE MAT'L: 14 GAUGE (0.083") THICK ZINC COATED (GALVANISED) SHEET METAL.
2. PAINT COLOR: ASA 61 GREY ELECTROSTATIC POWDER COAT FINISH
3. MAIN BREAKER: GE 15A, 2 POLE BREAKER
4. LOAD NEUTRAL LUGS: 9 LUGS NEUTRAL BAR, #4 AWG TO #14 AWG CAPACITY.
5. AS MANUFACTURED BY PSI OR EQUIVALENT.



4.		
3.		
2.		
1.		
	REVISIONS	DATE



CITY OF VAUGHAN ENGINEERING STANDARD

POLE HAND HOLE BREAKER SL2-50

NOT TO SCALE

DESIGNED: _____

REVISION: _____ DATE: _____ 2022

DATE: 2022




STD. DWG.

SL - 109

MATERIAL NOTES:

1. ENCLOSURE MAT'L: 14 GAUGE (0.083") THICK ZINC COATED (GALVANISED) SHEET METAL.
2. PAINT COLOR: ASA 61 GREY ELECTROSTATIC POWDER COAT FINISH
3. MAIN BREAKER: GE 15A, 2 POLE BREAKER
4. LOAD NEUTRAL LUGS: 9 LUGS NEUTRAL BAR, #4 AWG TO #14 AWG CAPACITY.
5. AS MANUFACTURED BY PSI OR EQUIVALENT.

Acad File: C:\Users\vaughan\OneDrive - City of Vaughan\1 - PE STAFF\1 - In. Rev. Services - Map Rev\2022\1 - Standardizing Standards\STREETLIGHT STANDARDS - NEW\SL-110 - 5' Victorian Scroll Arm.dwg

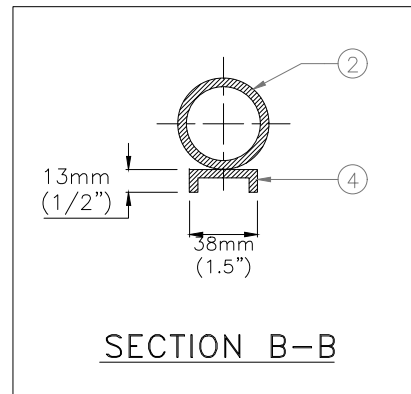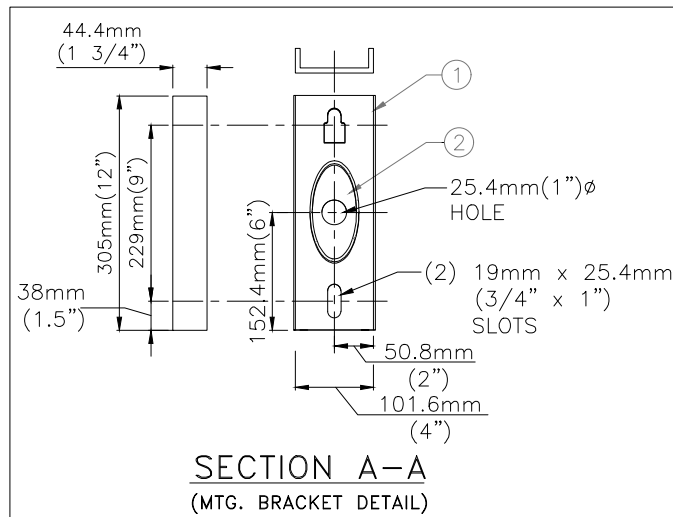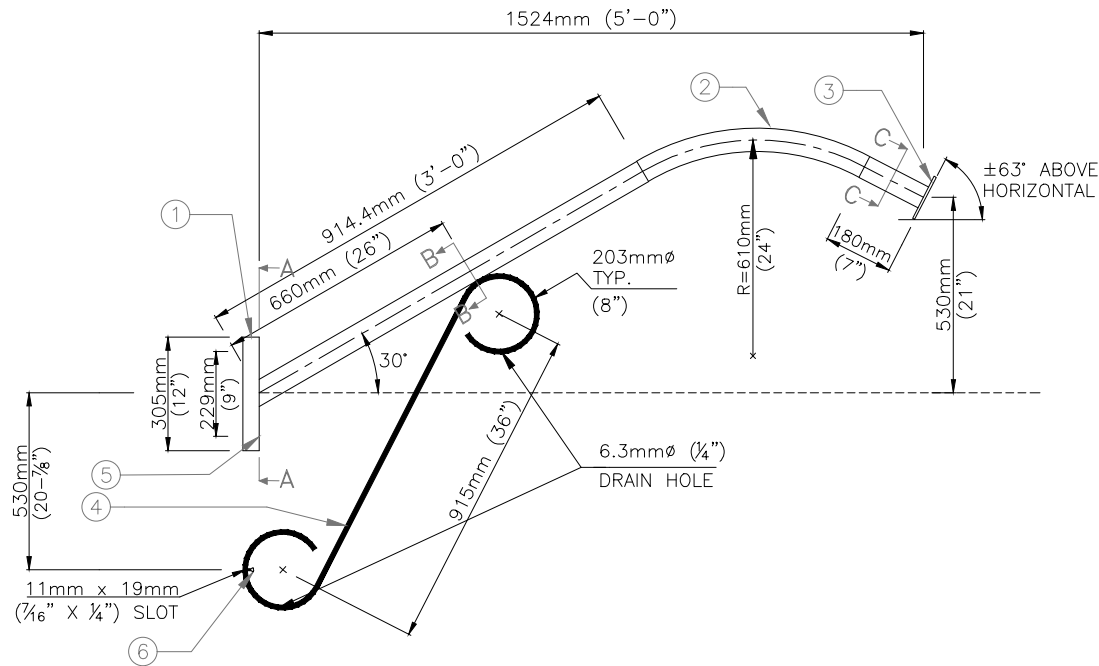


mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

BILL OF MATERIAL

ITEM #	PART DESCRIPTION	MATERIAL	QTY.
1	4" x 12" LONG CHANNEL	ALUM.	1
2	2.0" ALUMINUM PIPE	ALUM.	1
3	5" SQ. x 1/4" PLATE	ALUM.	1
4	1.5" CHANNEL	ALUM.	1
5	5/8" x 2.75" BOLTS & WASHERS	ST. STEEL	2
6	3/8" x 1.5" BOLT & WASHER	ST. STEEL	1

* MAXIMUM LUMINAIRE SIZE ALLOWABLE
50 lbs. - 3 sq.ft. EPA

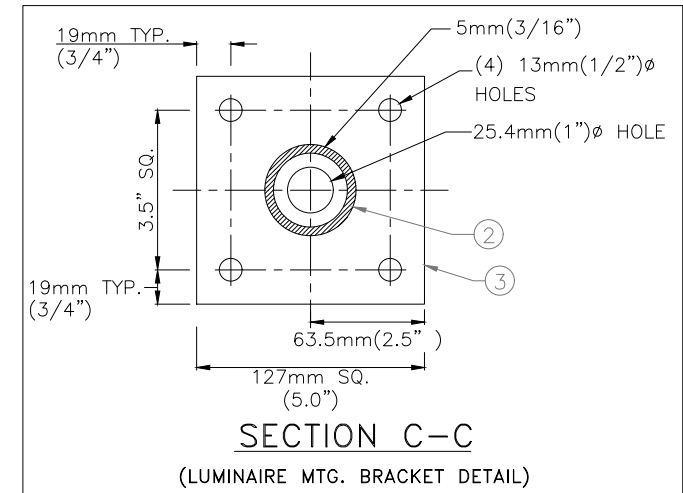

4.		
3.		
2.		
1.		
REVISIONS		DATE




CITY OF VAUGHAN ENGINEERING STANDARD

1.5m (5') VICTORIAN SCROLL ARM

NOT TO SCALE
DESIGNED: _____
REVISION: _____
DATE: 2022




STD. DWG.
SL - 110

VICTORIAN SCROLL ARM

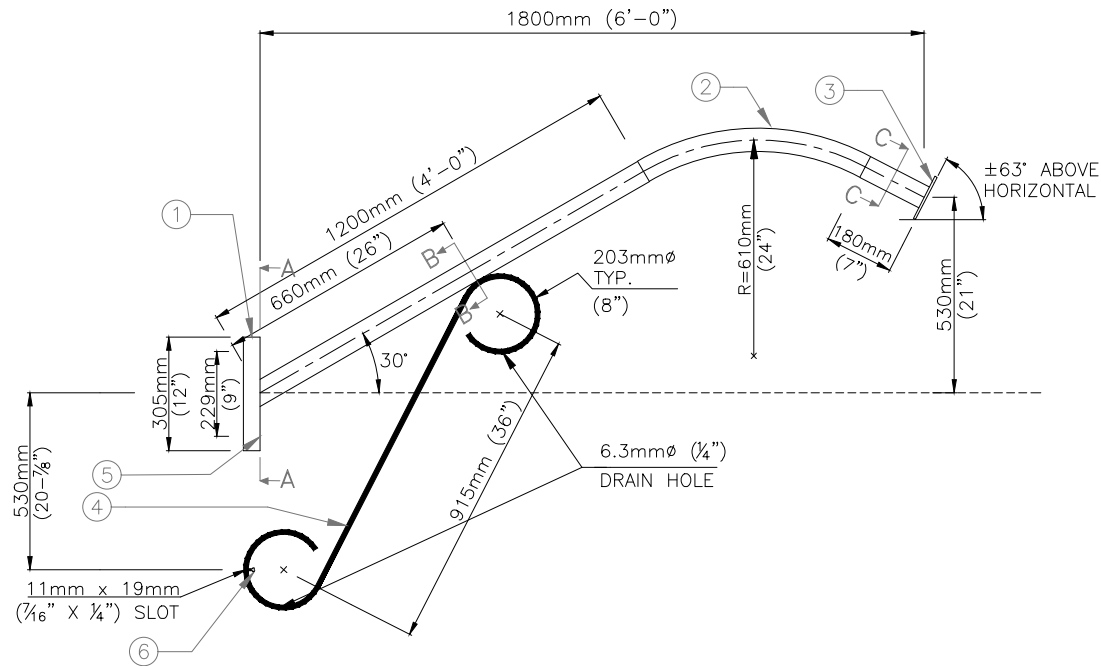


BILL OF MATERIAL			
ITEM #	PART DESCRIPTION	MATERIAL	QTY.
1	4" x 12" LONG CHANNEL	ALUM.	1
2	2.5" SCH. 40 ALUMINUM PIPE	ALUM.	1
3	5" SQ. x 1/4" PLATE	ALUM.	1
4	1.5" CHANNEL	ALUM.	1
5	5/8" x 2.75" BOLTS & WASHERS	ST. STEEL	2
6	3/8" x 1.5" BOLT & WASHER	ST. STEEL	1

* MAXIMUM LUMINAIRE SIZE ALLOWABLE
50 lbs. - 3 sq.ft. EPA

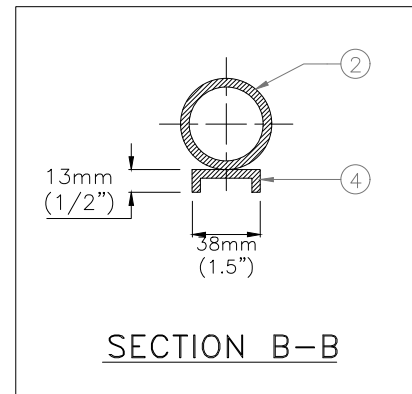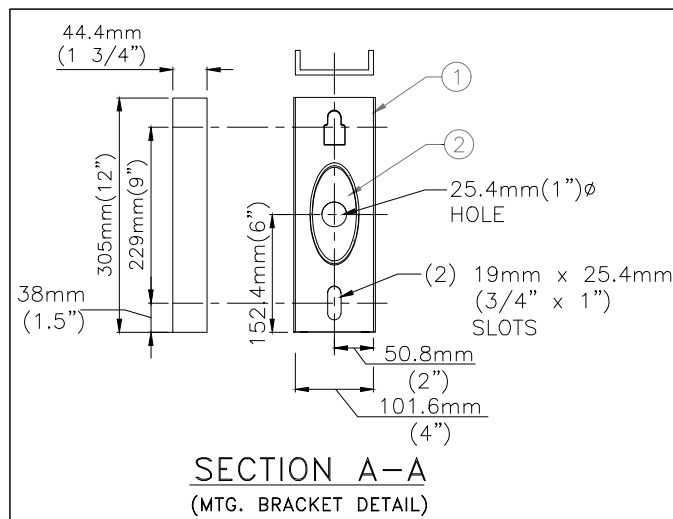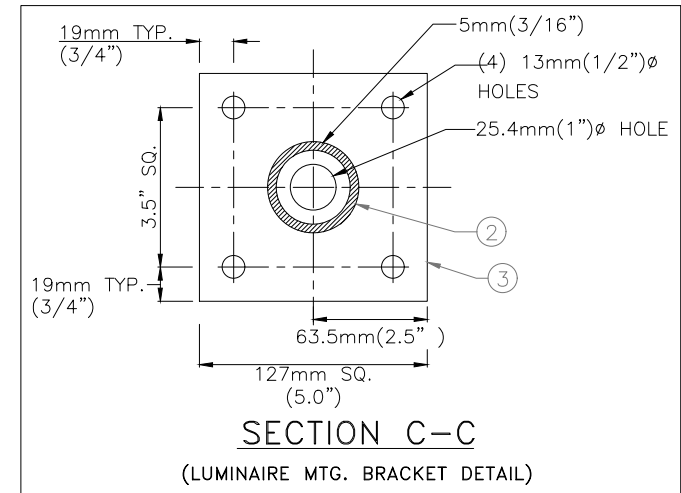



mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE
CITY OF VAUGHAN ENGINEERING STANDARD		
1.8m (6')		
VICTORIAN SCROLL ARM		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL - 111

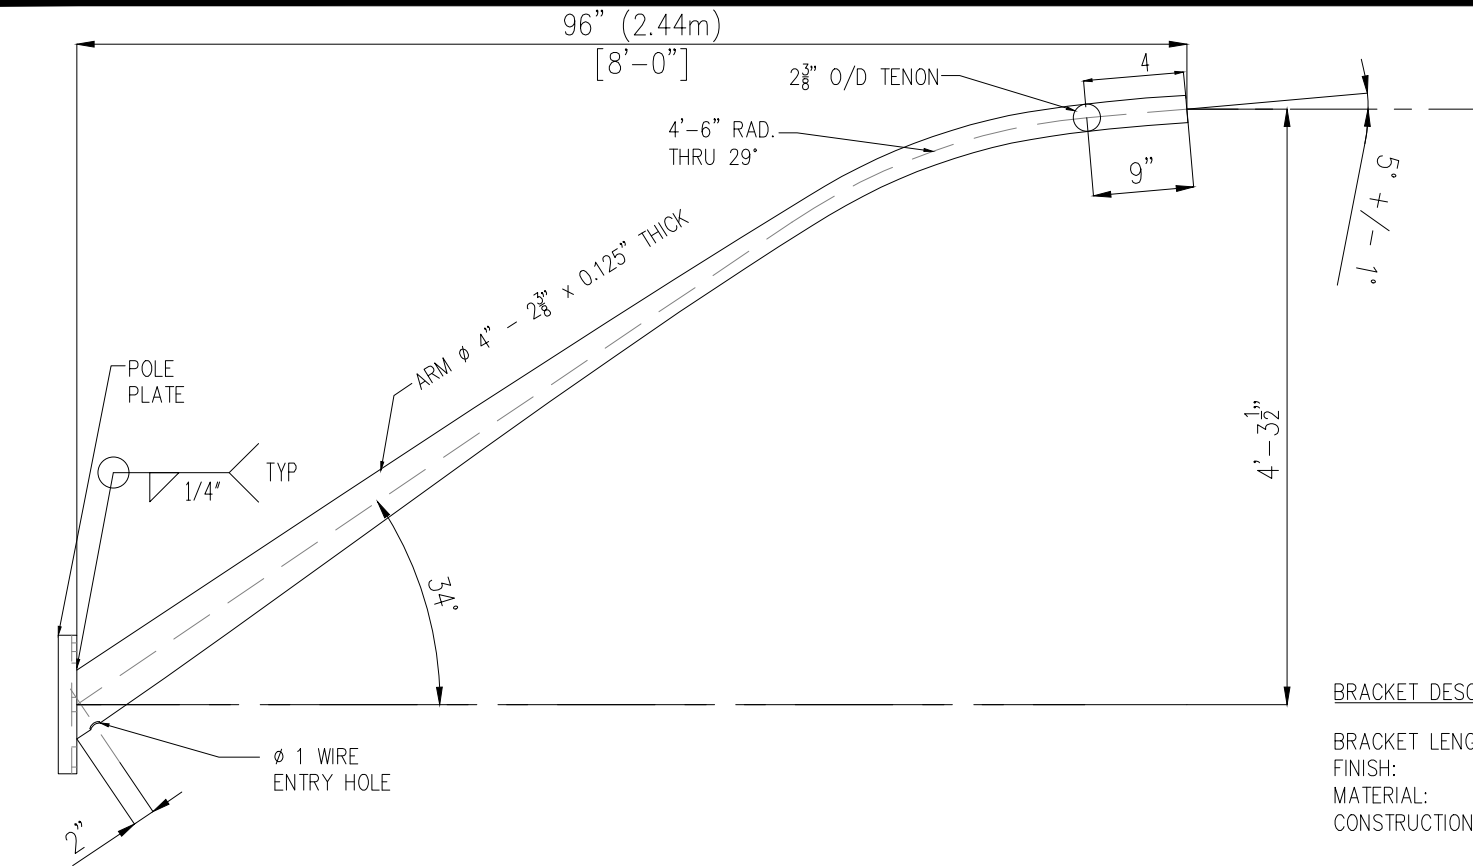


BRACKET DESCRIPTION


BRACKET LENGTH: 8'-0" / 96" / 2.44m
 FINISH: NATURAL BRUSH FINISH
 MATERIAL: ALUMINUM
 CONSTRUCTION: ARM TEMPERED: T6 - AFTER ALL OPERATIONS. ALL WELDING AS PER CSA 47.2

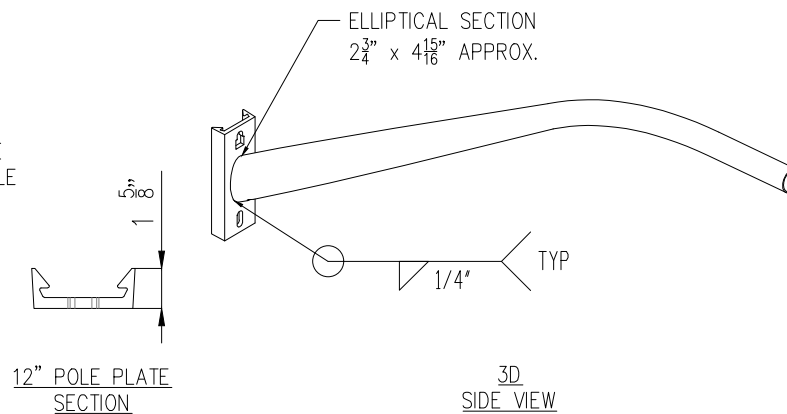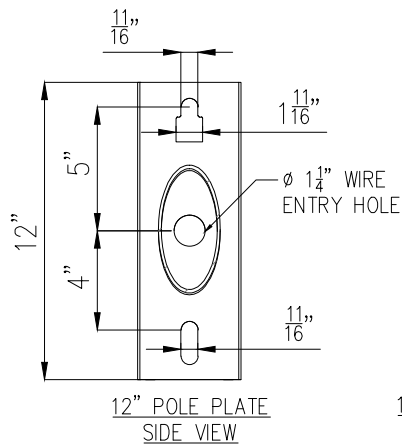

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
2.44m (8') ALUMINUM ELLIPTICAL BRACKET		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-114



4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
3m (10') ALUMINUM ELLIPTICAL BRACKET		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-115
REVISION: _____	DATE: 2022 _____	



4.		
3.		
2.		
1.		
	REVISIONS	DATE




VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD

**3.65m (12') ALUMINUM
ELLIPTICAL BRACKET**


NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-116
REVISION: _____	DATE: <u>2022</u>	

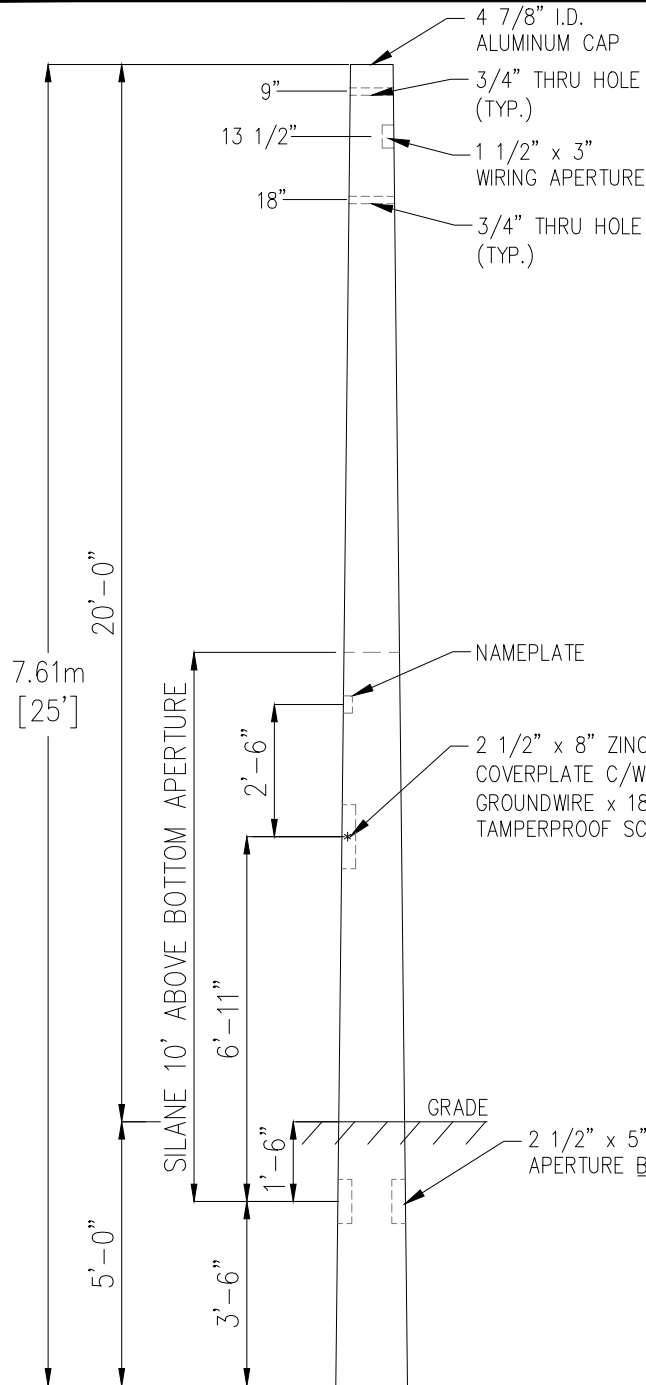

POLE DESCRIPTION

SECTION: ROUND
 FINISH: MOULD FINISH
 POLE TOP: 4 3/4\" DIA.
 POLE BUTT: 9 1/4\" DIA.
 POLE LENGTH: 25' 0"
 APPROX. WGT.: 945 LBS.
 MIN. RACEWAY: 1 1/8\" Ø

NAMEPLATE H.H.
 BOX THRU HOLE
 APERTURE




TOP VIEW

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.


4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
7.6m (25') TAPERED ROUND CONCRETE POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-117
REVISION: _____	DATE: 2022	

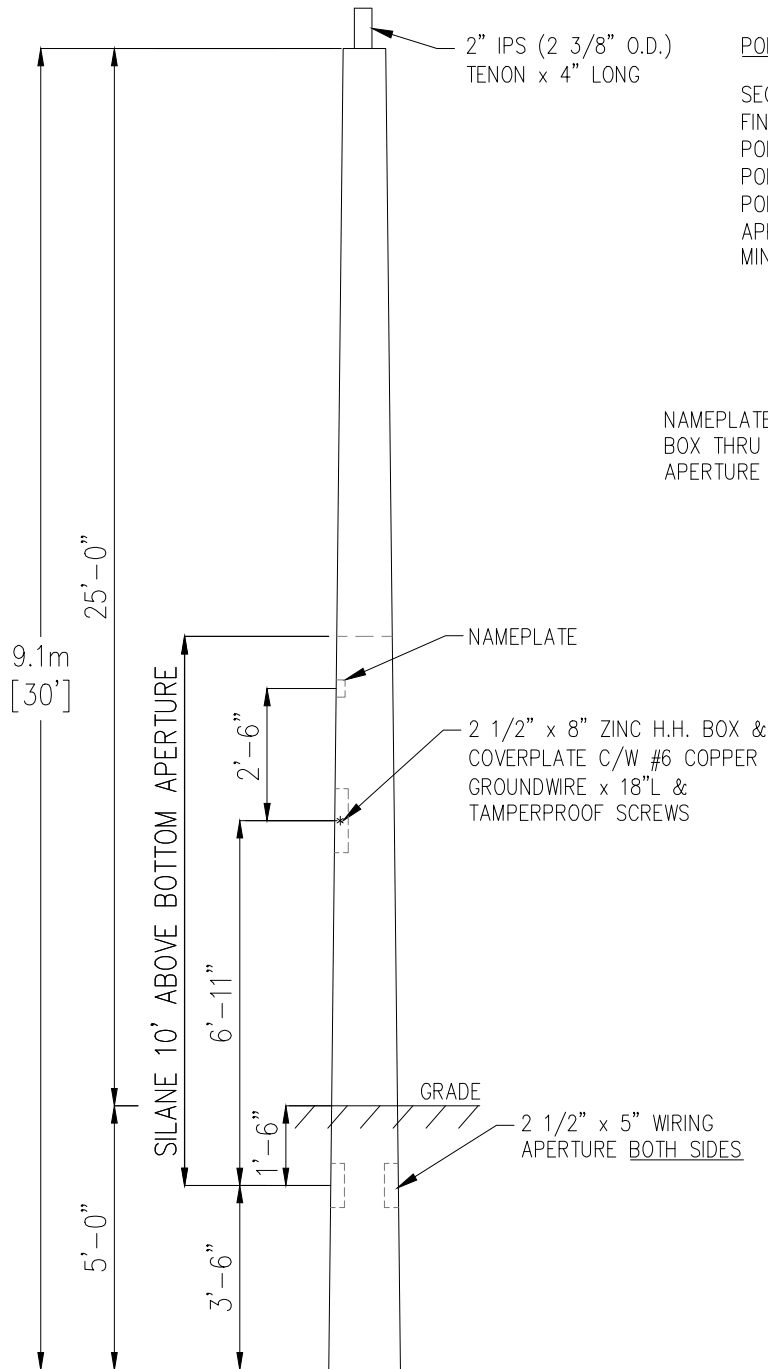

POLE DESCRIPTION

SECTION: ROUND
FINISH: MOULD FINISH
POLE TOP: 4 3/4" DIA.
POLE BUTT: 10 1/8" DIA.
POLE LENGTH: 30' 0"
APPROX. WGT.: 1,365 LBS.
MIN. RACEWAY: 1 1/8" Ø

NAMEPLATE H.H.
BOX THRU HOLE
APERTURE




TOP VIEW

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.


4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
9.1m (30') TAPERED ROUND CONCRETE POST TOP POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-118

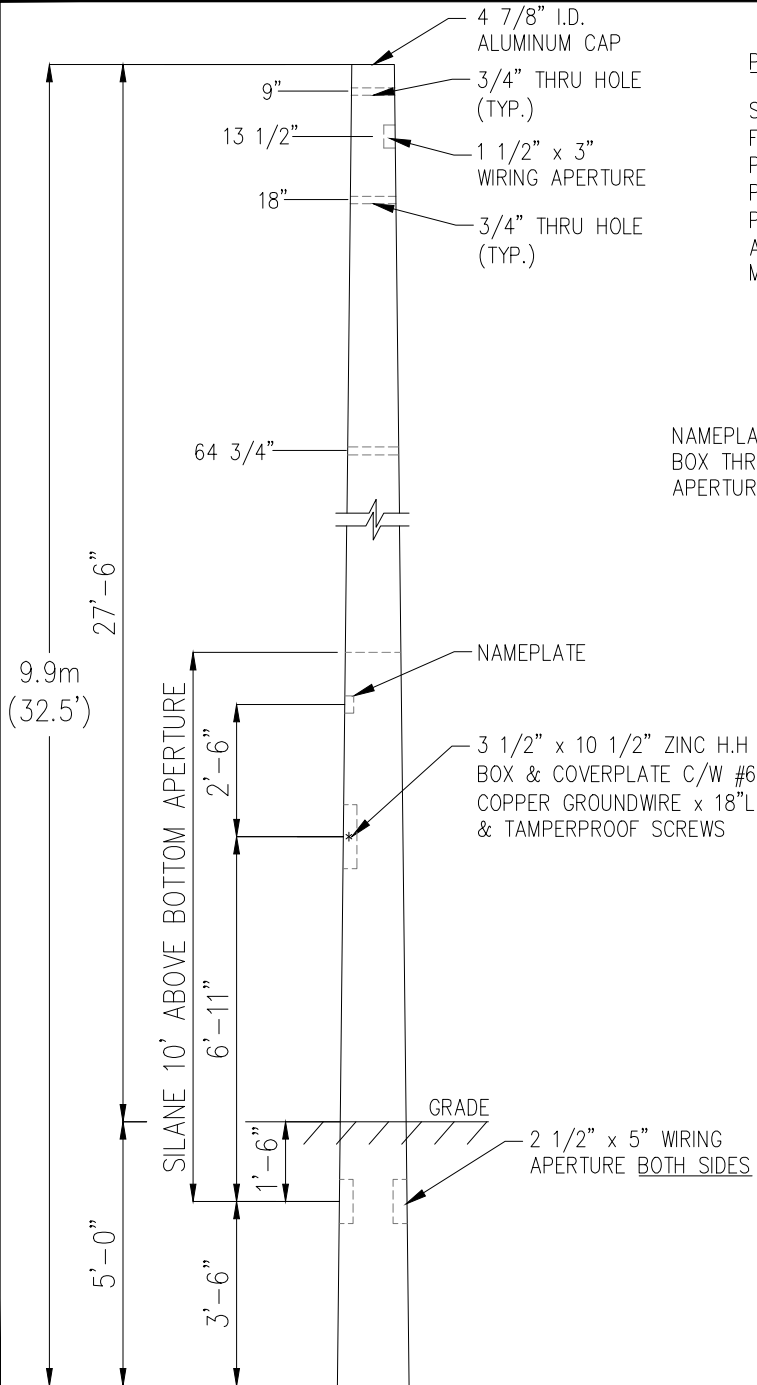

POLE DESCRIPTION

SECTION: ROUND
 FINISH: MOULD FINISH
 POLE TOP: 4 3/4" DIA.
 POLE BUTT: 10 5/8" DIA.
 POLE LENGTH: 32' 6"
 APPROX. WGT.: 1,535 LBS.
 MIN. RACEWAY: 1 1/8" Ø

NAMEPLATE H.H.
 BOX THRU HOLE
 APERTURE




TOP VIEW


NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
9.9m (32.5') TAPERED ROUND CONCRETE POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-119

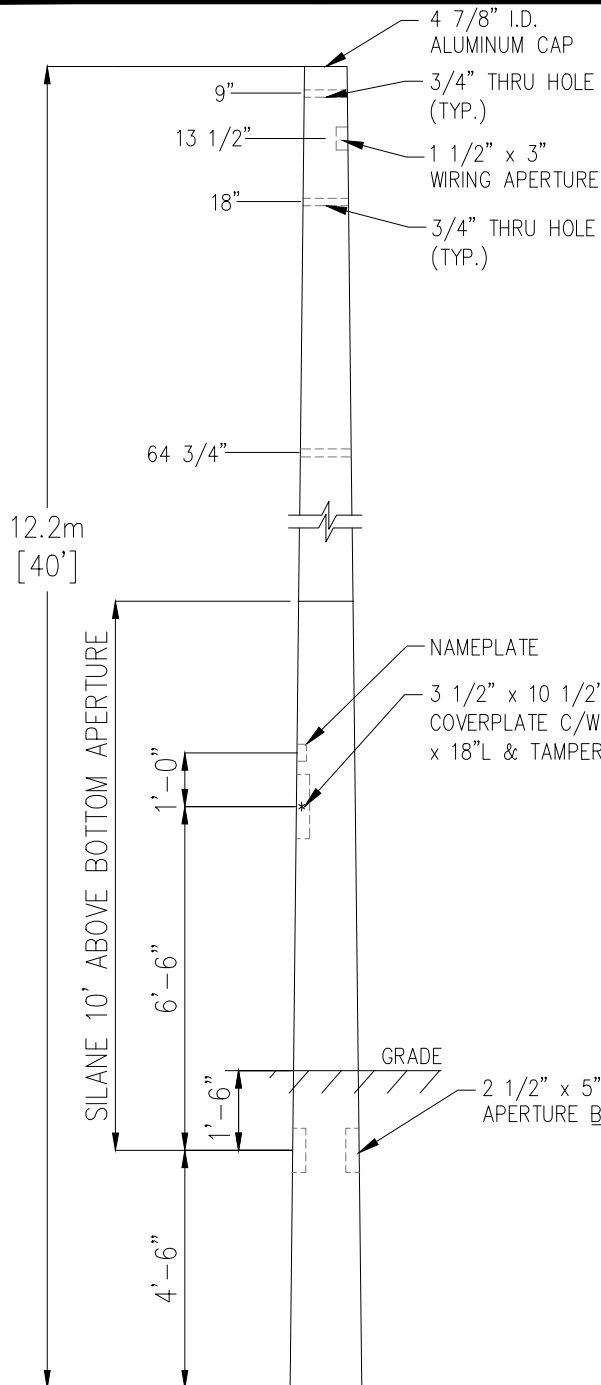

NAMEPLATE H.H.
BOX THRU HOLE
APERTURE



TOP VIEW

POLE DESCRIPTION


SECTION: ROUND
FINISH: MOULD FINISH
POLE TOP: 4 3/4" DIA.
POLE BUTT: 11 15/16" DIA.
POLE LENGTH: 40' 0"
APPROX. WGT.: 2,110 LBS.
MIN. RACEWAY: 1 1/8" Ø

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
12.2m (40') TAPERED ROUND CONCRETE POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-120


And File: C:\Users\vaughan\OneDrive - City of Vaughan\1 - PC\DWG\1 - In Rev\121 - In Rev\121.dwg - Map Rev\2022\1 - In Rev\121.dwg - Map - Other\City W/L - Standard\Standard\STRUCTURE\STANDARD - W/L\121 - 42.5' (12.9m) Tapered Round Concrete Pole.dwg

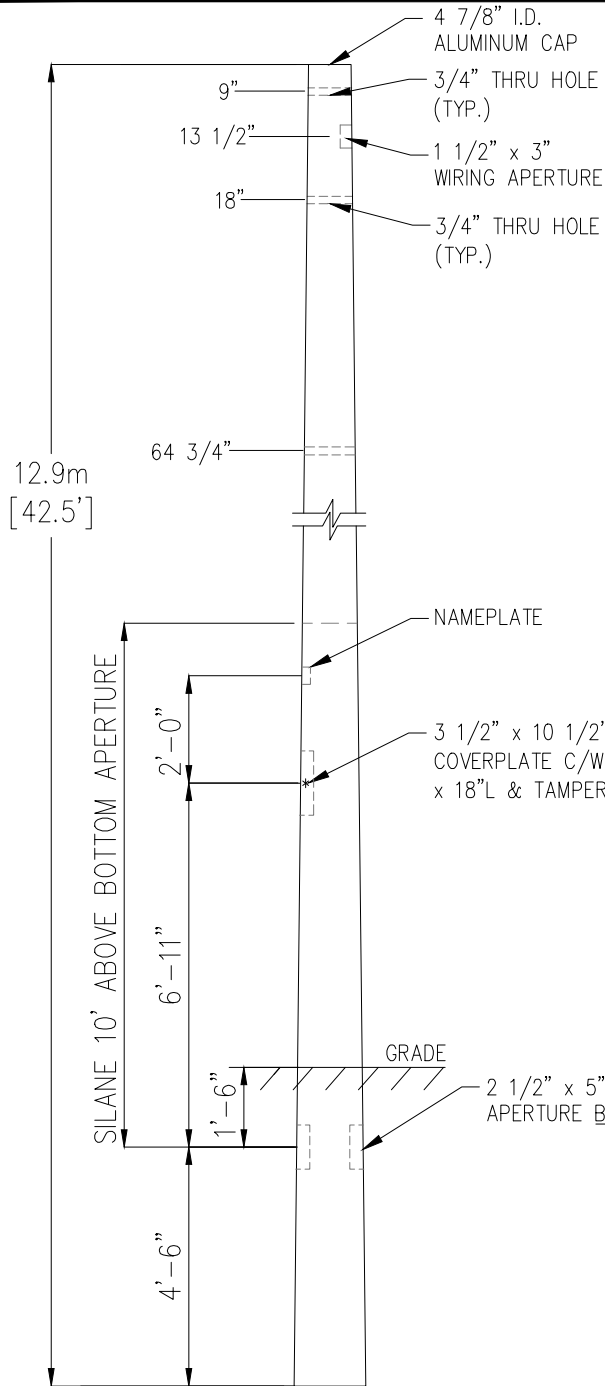

POLE DESCRIPTION

SECTION: ROUND
FINISH: MOULD FINISH
POLE TOP: 4 3/4" DIA.
POLE BUTT: 12 1/2" DIA.
POLE LENGTH: 42' 6"
APPROX. WGT.: 2,320 LBS.
MIN. RACEWAY: 1 1/8" Ø

NAMEPLATE H.H.
BOX THRU HOLE
APERTURE




TOP VIEW

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
12.9m (42.5') TAPERED ROUND CONCRETE POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-121


And File: C:\Users\vaughan\OneDrive - City of Vaughan\ - PC\DWG\SL-122 - In Rev. Services - Map Rev\2022\SL-122 - Other\City W/L - Standardizing Standards\STRUCTURES STANDARDS - NEW\SL-122 - 50' (15.2m) Tapered Round Concrete Pole.dwg

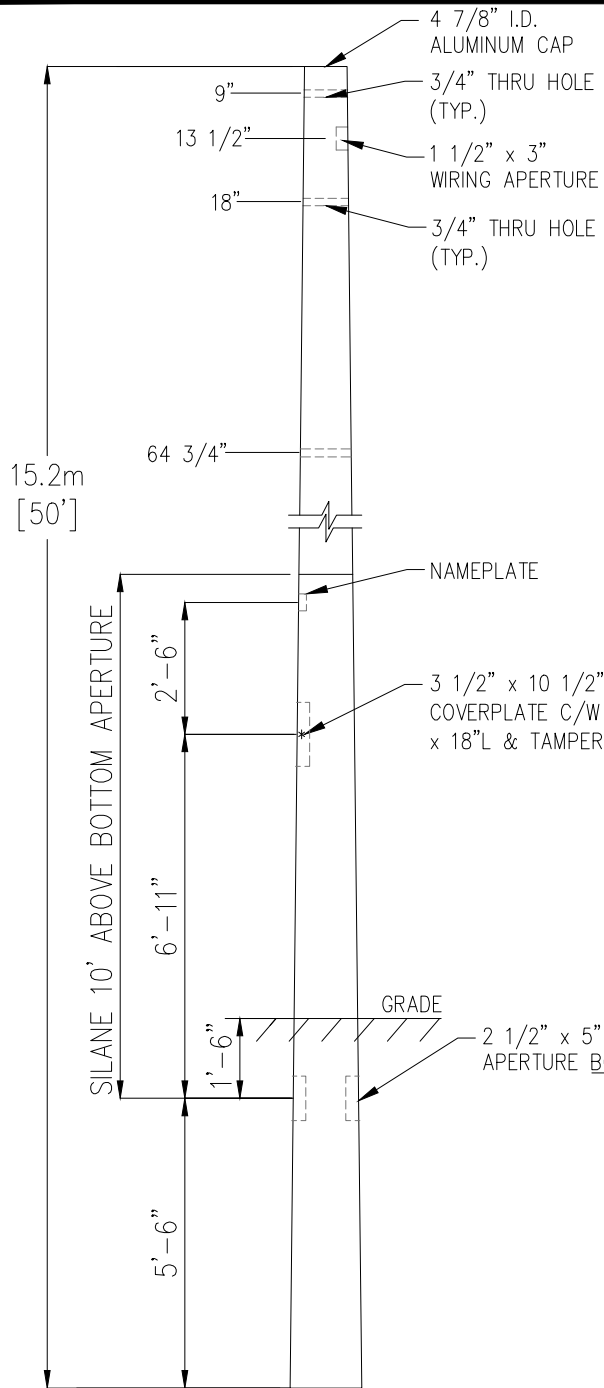

POLE DESCRIPTION

SECTION: ROUND
FINISH: MOULD FINISH
POLE TOP: 6 1/2" DIA.
POLE BUTT: 15 1/2" DIA.
POLE LENGTH: 50' 0"
APPROX. WGT.: 4,500 LBS.
MIN. RACEWAY: 1 1/8" Ø

NAMEPLATE H.H.
BOX THRU HOLE
APERTURE




TOP VIEW


NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
15.2m (50') TAPERED ROUND CONCRETE POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-122
REVISION: _____	DATE: 2022	

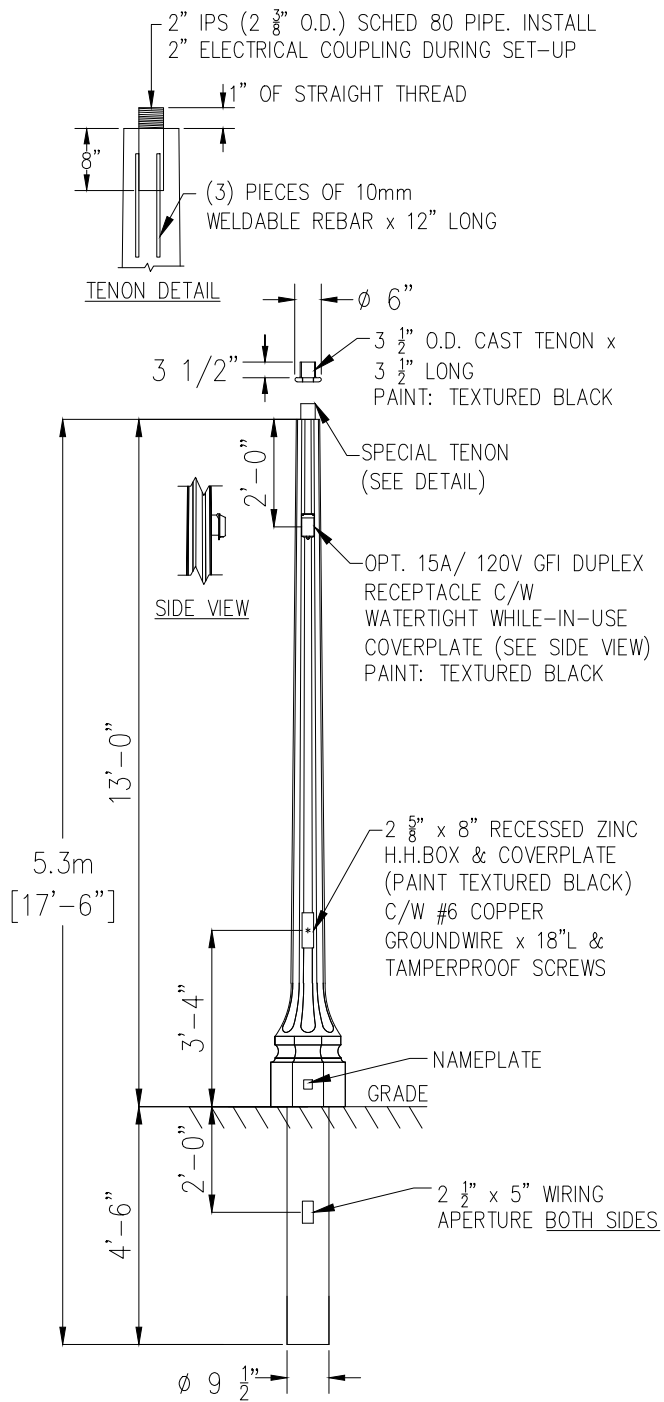POLE DESCRIPTION

SECTION:	FLUTED OCTAGONAL
FINISH:	ECLIPSE ETCHED
POLE TOP:	5 1/2" DIA.
POLE BUTT:	9 1/2" DIA.
POLE LENGTH:	17' 6"
APPROX. WGT.:	1,075 LBS.
MIN. RACEWAY:	1 1/8" Ø
COATING REQ.:	2 COATS ACRYLIC (FULL LENGTH)

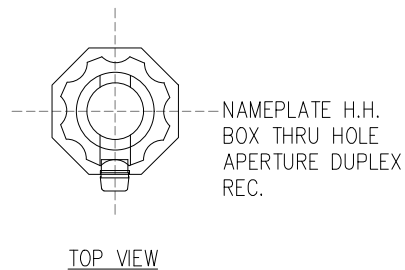

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.


4.		
3.		
2.		
1.		
REVISIONS		DATE


VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD


5.3m (17.5') DECORATIVE FLUTED OCTAGONAL (POST TOP) POLE

NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-123
REVISION: _____	DATE: _____ 2022 _____	

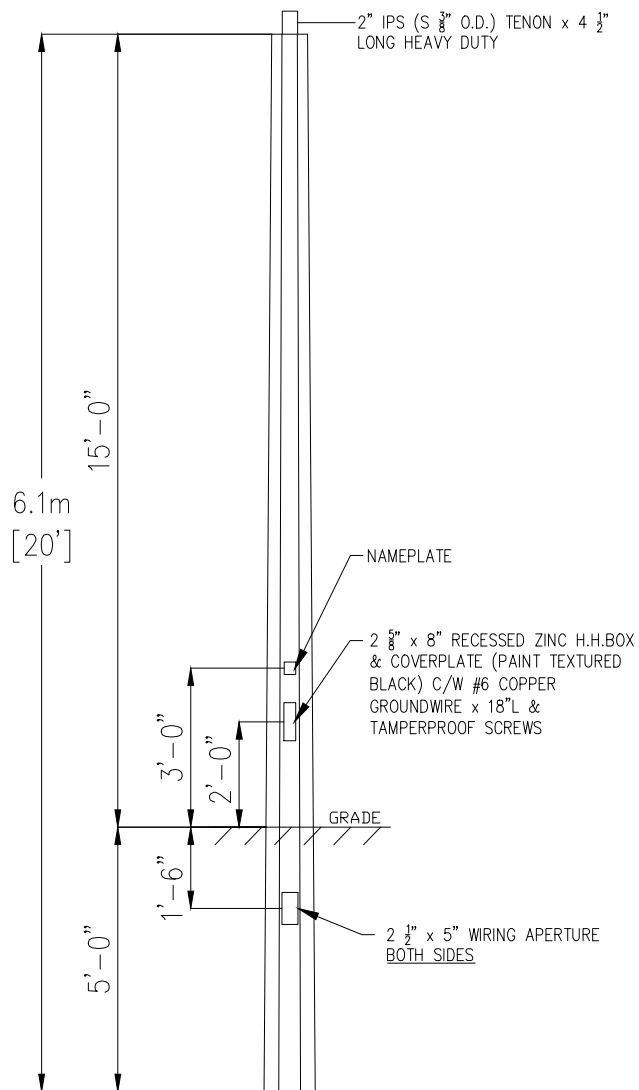

POLE DESCRIPTION

SECTION:	OCTAGONAL
FINISH:	ECLIPSE ETCHED
POLE TOP:	5 3/8" FL/FL
POLE BUTT:	7 7/8" FL/FL
POLE LENGTH:	20' 0"
APPROX. WGT.:	770 LBS.
MIN. RACEWAY:	1 1/8" Ø
COATING REQ.:	2 COATS ACRYLIC (FULL LENGTH)



NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.



4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
6.1m (20') TAPERED OCTAGONAL (POST TOP) POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-125
REVISION: _____	DATE: _____ 2022 _____	

POLE DESCRIPTION


SECTION: OCTAGONAL
 FINISH: SALUKI BRONZE POLISHED
 POLE TOP: 5 3/8" FL/FL
 POLE BUTT: 7 7/8" FL/FL
 POLE LENGTH: 20' 0"
 APPROX. WGT.: 712 LBS.
 MIN. RACEWAY: 1 1/8" Ø
 COATING REQ.: 2 COATS ACRYLIC (FULL LENGTH)

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

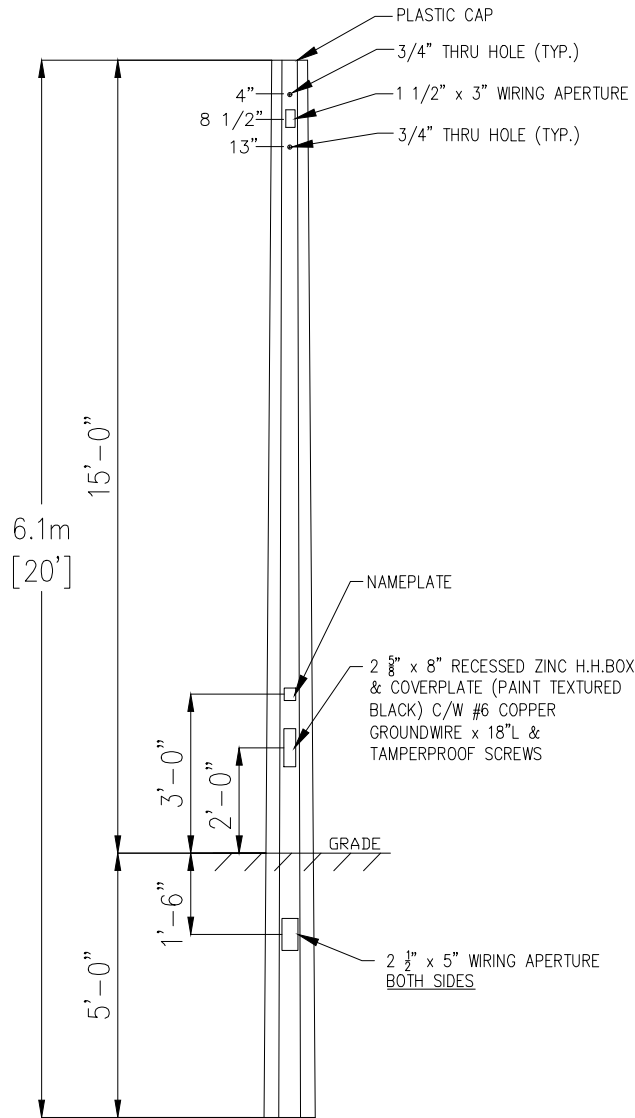


4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
6.1m (20') TAPERED OCTAGONAL POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-126

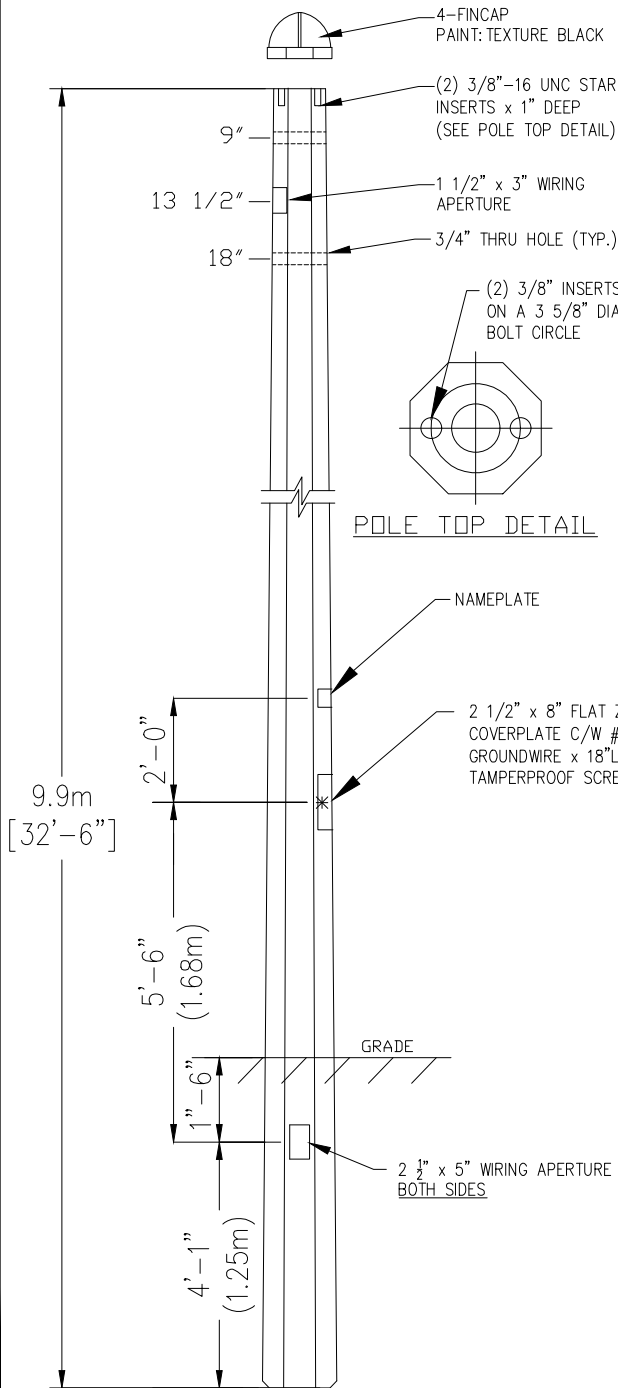

POLE DESCRIPTION

SECTION: OCTAGONAL
FINISH: ECLIPSE (BLACK) POLISHED
POLE TOP: 5 3/8" FL/FL
POLE BUTT: 9 7/16" FL/FL
POLE LENGTH: 32' 6"
APPROX. WGT.: 1,500 LBS.
MIN. RACEWAY: 1 1/8" Ø
COATING REQ.: 2 COATS ACRYLIC
(FULL LENGTH)

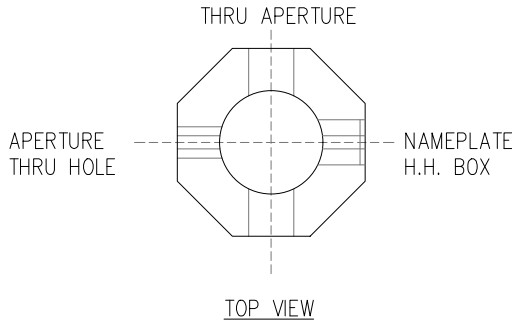


NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.


4.		
3.		
2.		
1.		
REVISIONS		DATE
CITY OF VAUGHAN ENGINEERING STANDARD		
9.9m (32.5') TAPERED OCTAGONAL POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-127

And File: C:\Infrastructure\Delivery\Infrastructure Programs\City Standards\Design Office\2020\City Standards\Utilities\Decorative Pole\Decorative Pole.dwg

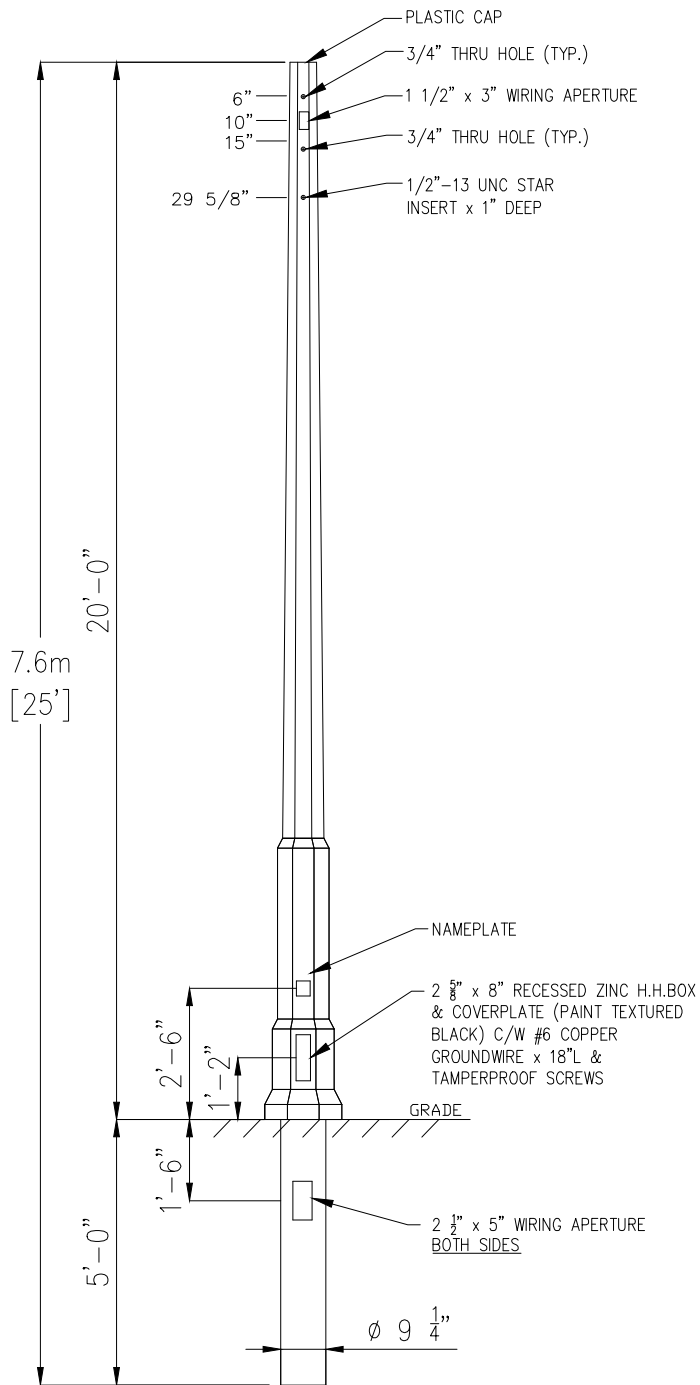

POLE DESCRIPTION


SECTION: OCTAGONAL
FINISH: ECLIPSE POLISHED
POLE TOP: 4 3/4" FL/FL
POLE BUTT: 9 1/4" FL/FL
POLE LENGTH: 25' 0"
APPROX. WGT.: 1,200 LBS.
MIN. RACEWAY: 1 1/8" Ø
COATING REQ.: 2 COATS ACRYLIC (FULL LENGTH)



NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
7.6m (25') DECORATIVE OCTAGONAL POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-128

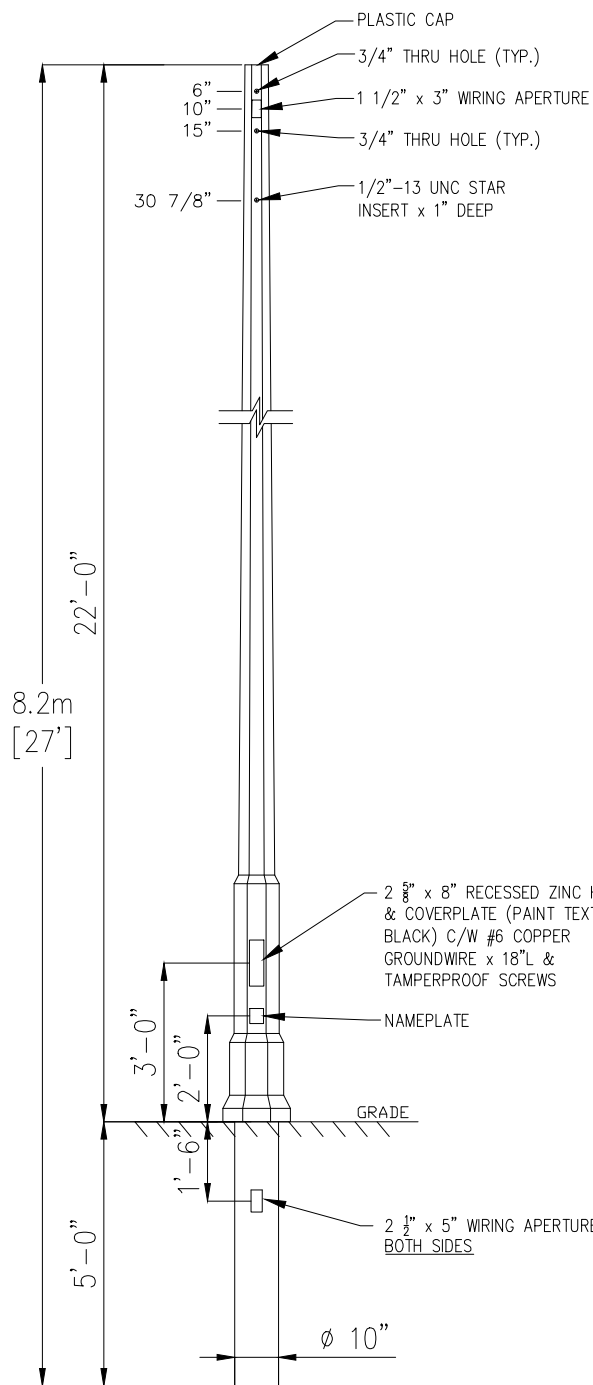


POLE DESCRIPTION


SECTION:	OCTAGONAL
FINISH:	ECLIPSE POLISHED
POLE TOP:	5 7/16" FL/FL
POLE BUTT:	10" FL/FL
POLE LENGTH:	27' 0"
APPROX. WGT.:	1,445 LBS.
MIN. RACEWAY:	1 1/8" Ø
COATING REQ.:	2 COATS ACRYLIC (FULL LENGTH)

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

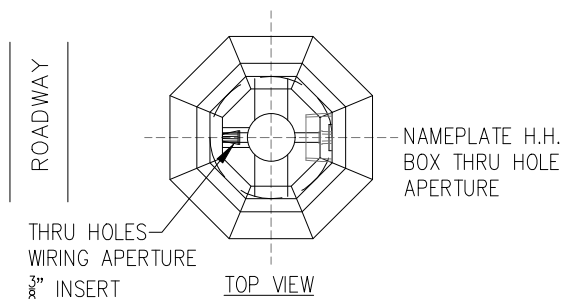

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
8.2m (27') DECORATIVE OCTAGONAL POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-129
REVISION: _____	DATE: <u>2022</u> _____	

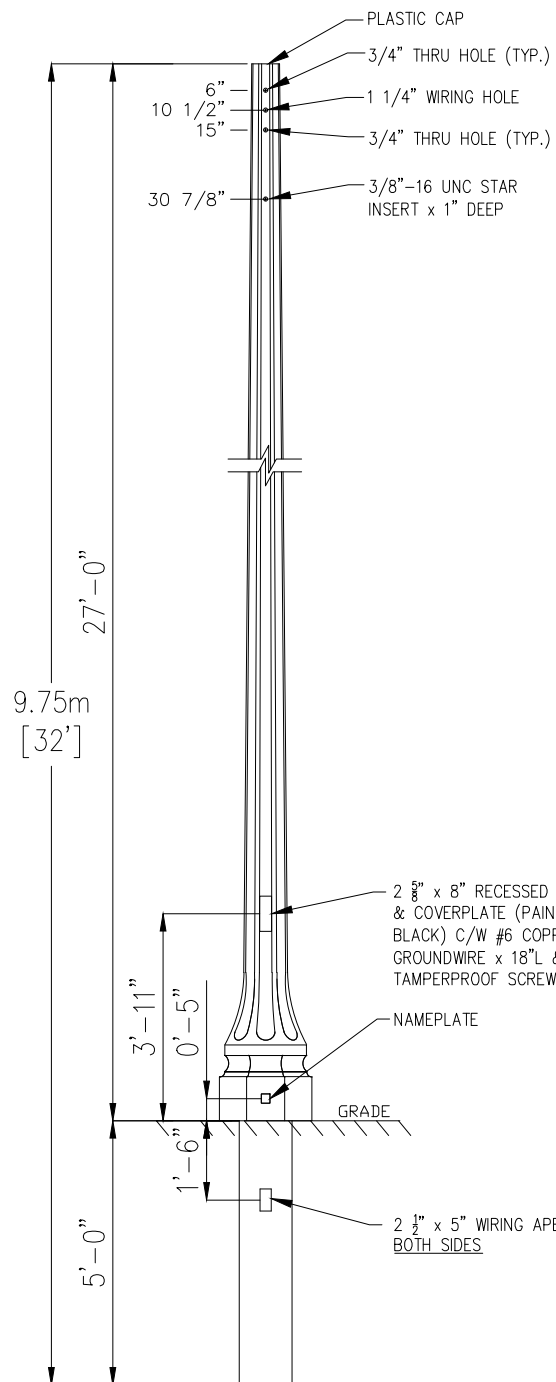


POLE DESCRIPTION

SECTION:	OCTAGONAL
FINISH:	ECLIPSE POLISHED
POLE TOP:	5 7/16" FL/FL
POLE BUTT:	10" FL/FL
POLE LENGTH:	27' 0"
APPROX. WGT.:	1,445 LBS.
MIN. RACEWAY:	1 1/8" Ø
COATING REQ.:	2 COATS ACRYLIC (FULL LENGTH)

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

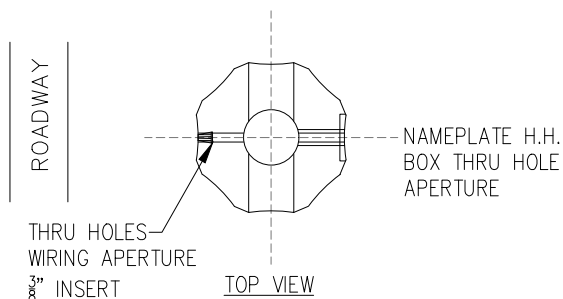

4.		
3.		
2.		
1.		
REVISIONS		DATE




VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD

**9.75m (32') DECORATIVE
FLUTED OCTAGONAL POLE**

NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-130
REVISION: _____	DATE: _____ 2022	


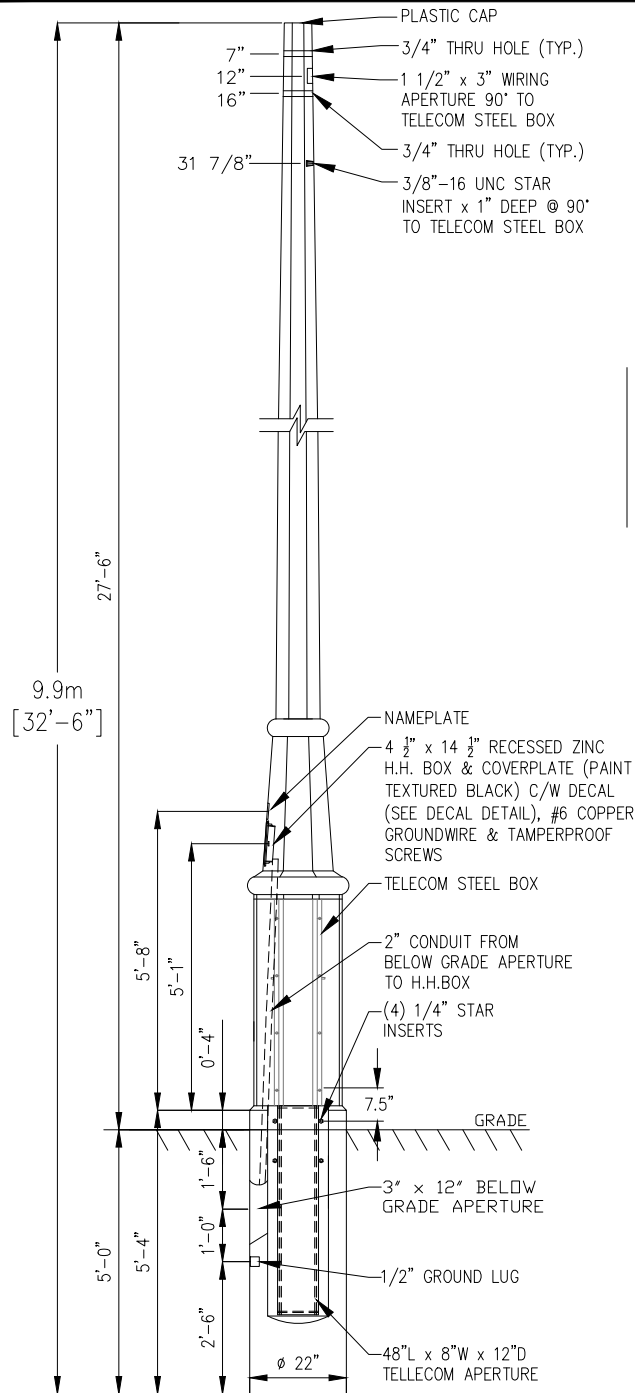


POLE DESCRIPTION

SECTION: OCTAGONAL
 FINISH: ECLIPSE ETCHED
 POLE TOP: 6 1/4" FL/FL
 POLE BUTT: 22" DIA.
 POLE LENGTH: 32' 6"
 APPROX. WGT.: 4,365 LBS.
 MIN. RACEWAY: 1 1/8" Ø
 COATING REQ.: 2 COATS ACRYLIC (FULL LENGTH)

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.
4. METAL DOORS C/W HINGES. COLOR TO MATCH POLE.

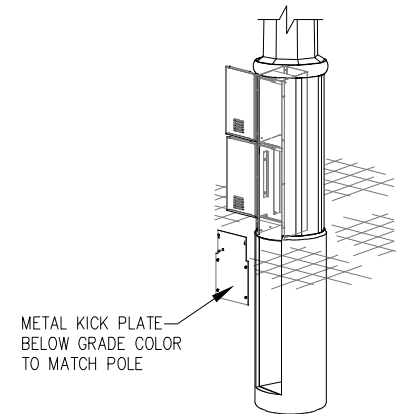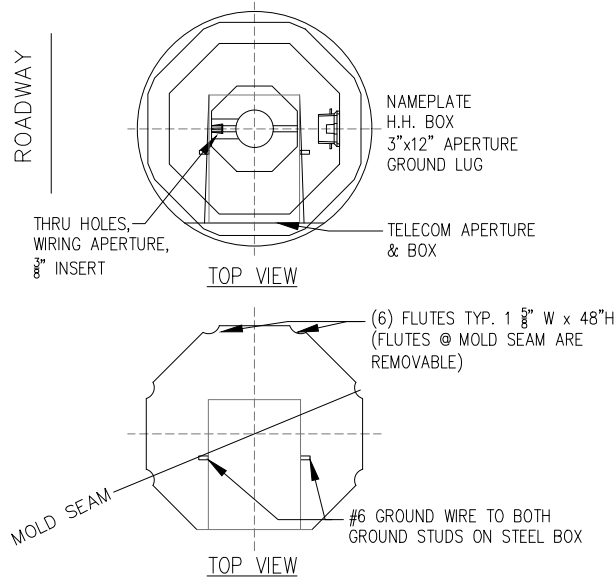


CABLE TV & TELEPHONE JOINT USE BOX WILL ACCEPT INSTALLATION OF COPPER, FIBER OR COAX EQUIPMENT FOR BOTH NARROWBAND & BROADBAND NETWORKS.



DECAL DETAIL

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
9.9m (32.5') DECORATIVE MULTI-UTILITY POLE		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: 2022	SL-131

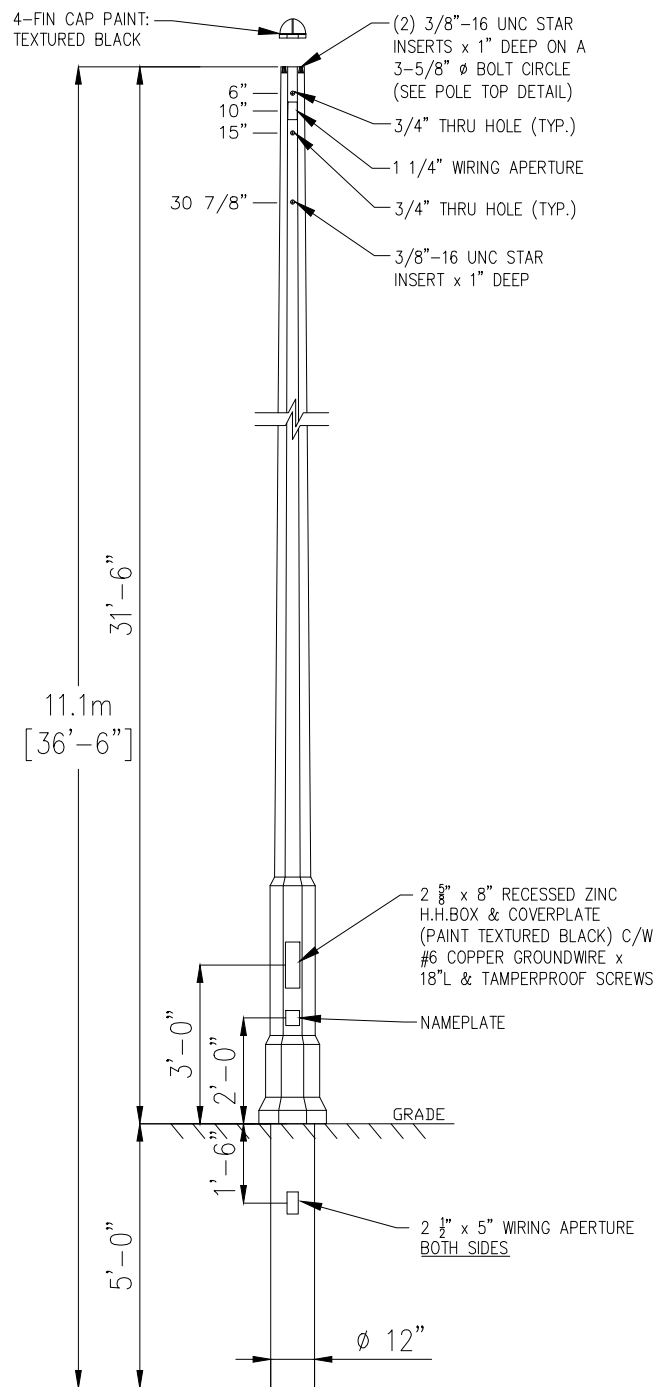

POLE DESCRIPTION

SECTION:

FINISH:

POLE TOP:

POLE BUTT:

POLE LENGTH:

APPROX. WGT.:

MIN. RACEWAY:

COATING REQ.:

OCTAGONAL

ECLIPSE ETCHED

6 1/4" FL/FL

22" DIA.


32' 6"

4.365 LBS.

1 1/8" ϕ

2 COATS ACRYLIC

(FULL LENGTH)

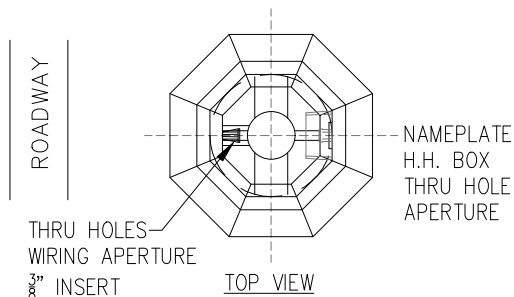

NOTES:

1. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
2. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
3. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
	REVISIONS	DATE




VAUGHAN

CITY OF VAUGHAN ENGINEERING STANDARD

**11.1m (36.5') DECORATIVE
OCTAGONAL POLE**

NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-132
REVISION: _____	DATE: <u>2022</u>	

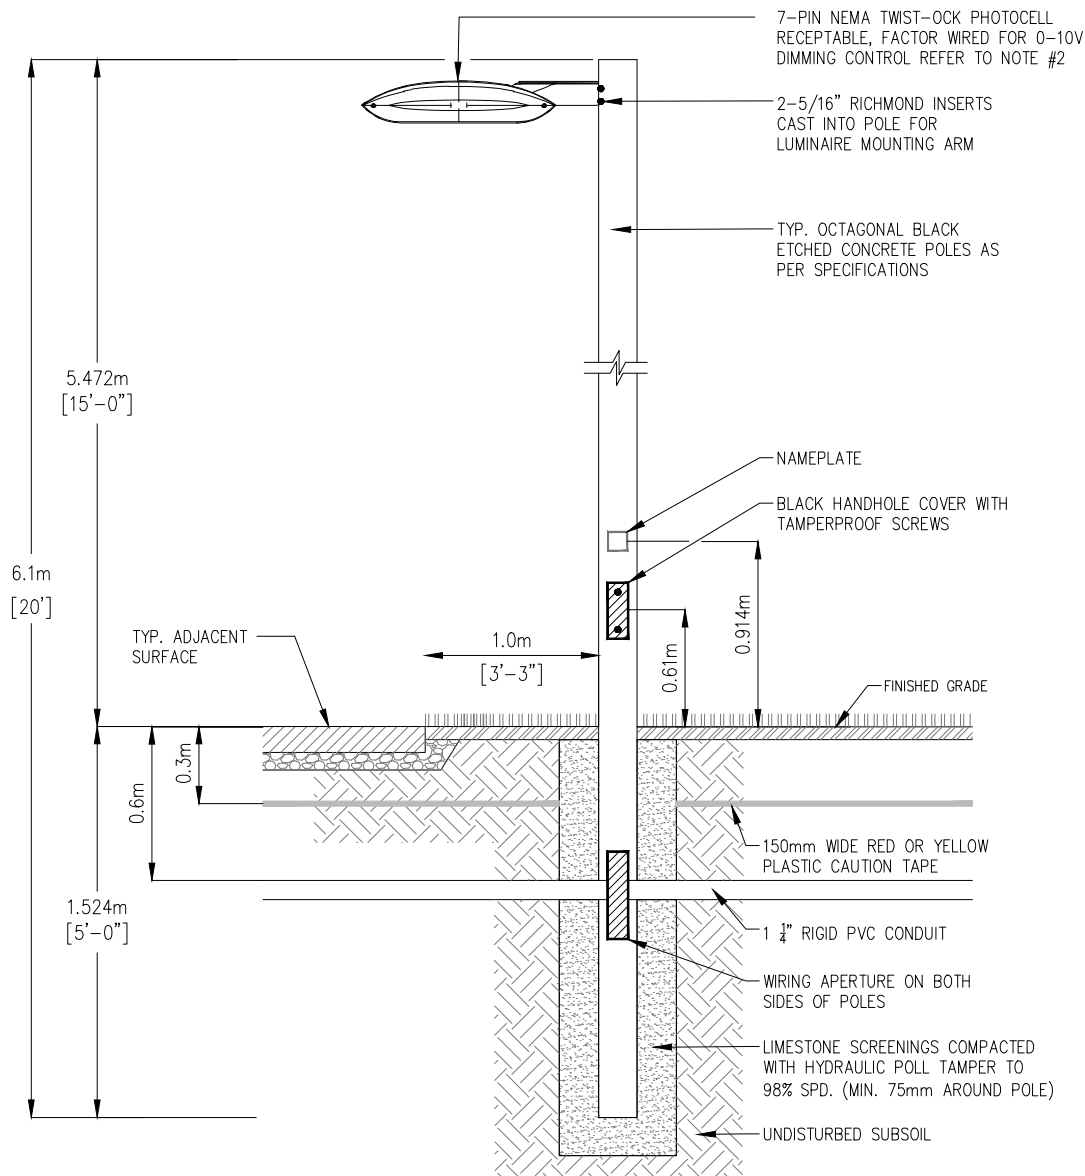


NOTES:


1. IN ACCORDANCE WITH E.S.A. STANDARDS AND SPECIFICATIONS, WARNING TAPE MUST BE PLACED 0.3m BELOW FINAL GRADE OVER ALL STREETLIGHT DUCTS INSTALLED IN AN OPEN TRENCH METHOD.
2. ALL FIXTURES MUST BE EQUIPPED WITH AN ANSI C136.41 COMPLIANT 7-PIN NEMA TWIST-LOCK PHOTOCELL RECEPTACLE, FACTORY WIRED FOR 0-10V DIMMING CONTROL.
3. CABLE RACEWAY IN POLE MUST BE OF SUFFICIENT DIAMETER TO ACCOMMODATE A DOUBLE RUN OF U/G CABLE UP TO THE HANDHOLE.
4. COPPER GROUND WIRE AT HANDHOLE IN ACCORDANCE WITH C.S.A. STANDARDS.
5. HANDHOLE AND NAMEPLATE TO BE ON HOUSE SIDE OF POLE.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
6.1m (20') POLE ASSEMBLY WALKWAY / PATHWAY LIGHTING		
NOT TO SCALE	DESIGNED: _____	STD. DWG. SL-133
REVISION: _____	DATE: 2023	


FILE: C:\Infrastructure Delivery\Infrastructure Programming\PMO\City Standards\Design Criteria 2020-21\City Standards Update Folder\City Standards Drawings CAD_2021\FRW-101 - Chain Link Security Fencing.dwg

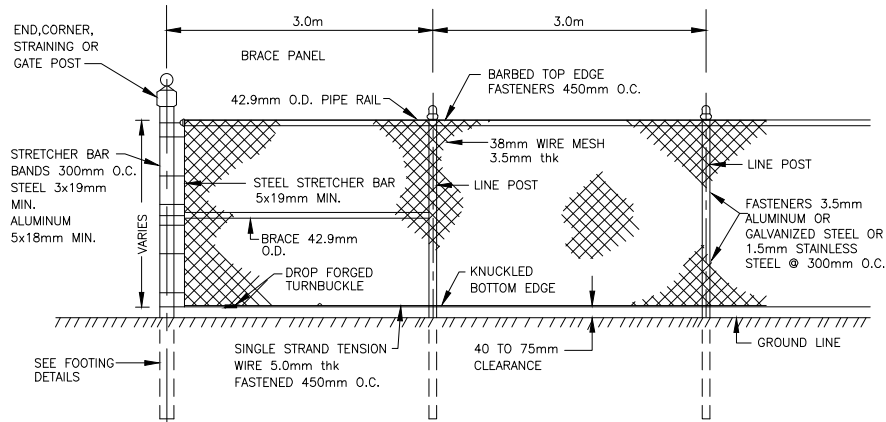


FENCE DETAILS

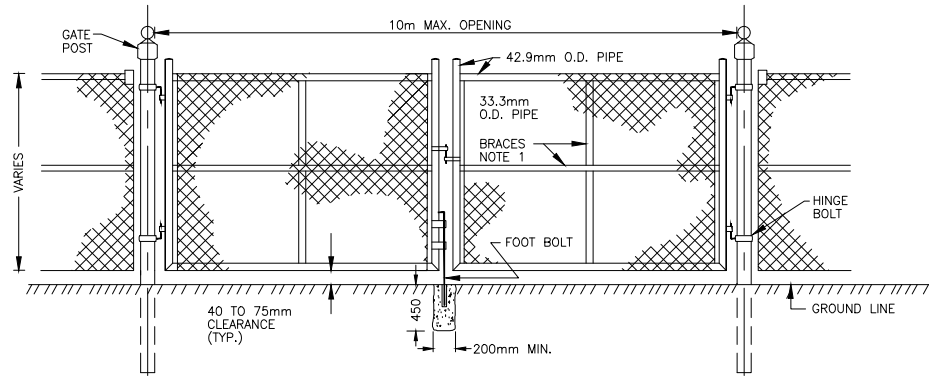


DOUBLE GATE

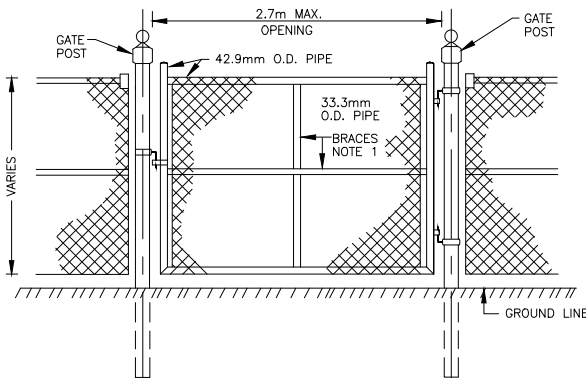

SINGLE GATE

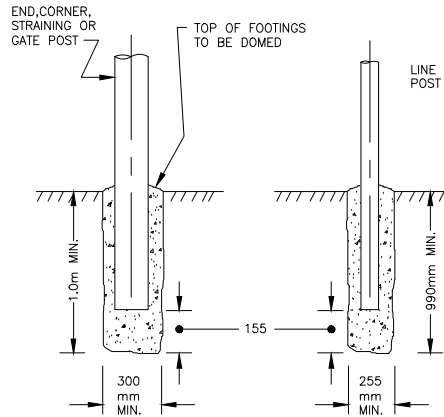

FOOTING DETAILS



NOTES

1. PIPE BRACES: GATE LEAVES UP TO 1.8m WIDE—REQUIRES HORIZONTAL BRACES ONLY.

GATE LEAVES OVER 1.8m WIDE—REQUIRES BOTH HORIZONTAL AND VERTICAL BRACES
2. POST LENGTH: FOR FABRIC WIDTHS GREATER THAN 1829mm THE POST SHALL BE INCREASED BY THE AMOUNT OF THE DIFFERENCE.
3. ALL FENCE COMPONENTS TO BE BLACK COATED VINYL.
4. BLACK FABRIC TO BE 3.5mm THICK WIRE WITH BLACK VINYL COATING.
5. ALL PIPING SHALL BE STANDARD CONTINUOUS WELD, SCHEDULE 40 PIPE, GALVANIZED. NO TUBING, CONDUIT OR OPEN SEAM MATERIAL WILL BE PERMITTED.

POST DETAILS			
DESCRIPTION	OD (mm)	LENGTH NOTE 2	
		STANDARD (m)	STANDARD WALLS(m)
LINE	60.3	2.7	2.0
END, CORNER, STRAINING AND GATE (5.5m MAX OPENING)	88.9	2.9	2.3
GATES (10m MAX OPENING)	114.3	2.9	—

4.		
3.		
2.		
1.		
REVISIONS		DATE





CITY OF VAUGHAN ENGINEERING STANDARD

CHAIN LINK SECURITY FENCE


NOT TO SCALE
DESIGNED: _____
REVISION: _____
DATE: DEC. 2020

STD. DWG.
FRW - 101


m DIMENSIONS IN METRES
EXCEPT AS NOTED

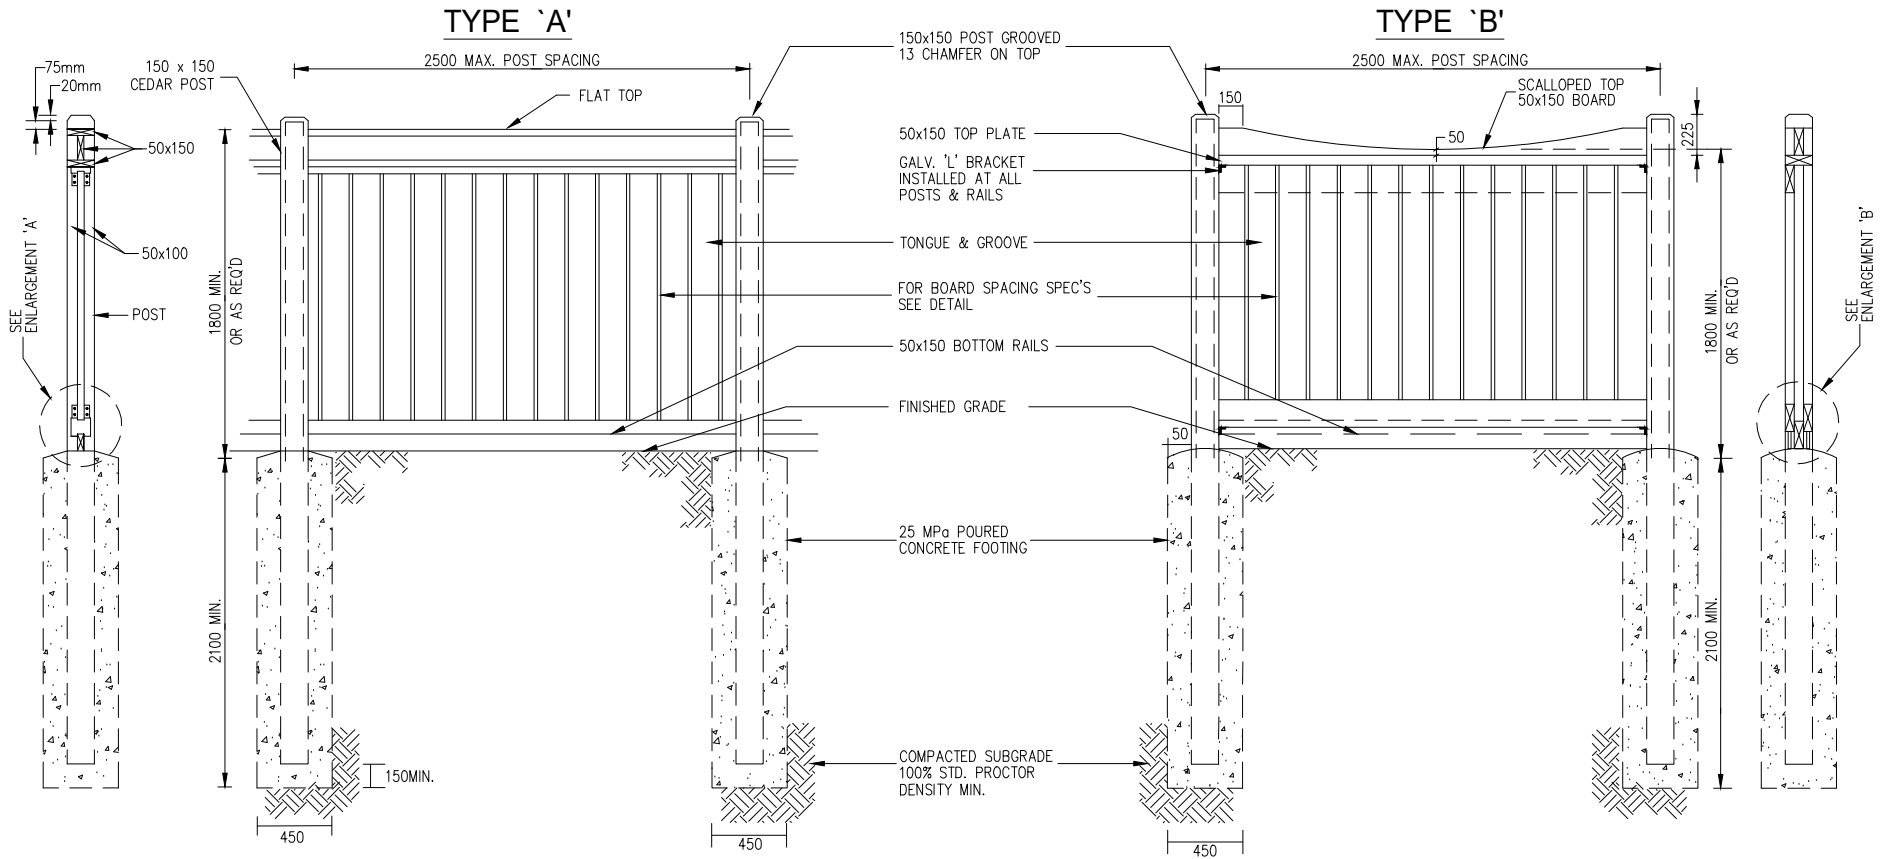

ENLARGEMENT 'A'



ENLARGEMENT 'B'

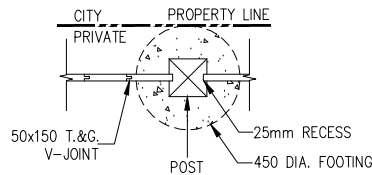

**TONGUE & GROOVE
DETAIL**

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

ACOUSTIC WOOD FENCE

NOT TO SCALE

DESIGNED: _____

REVISION: _____



DATE: DEC. 2020

STD. DWG.


FRW - 102

NOTE


1. REFER TO STD. DWG. FRW-104 FOR SPECIFICATIONS.
2. FENCE HEIGHT HIGHER THAN 1.8m IS SUBJECT TO THE APPROVAL OF THE CITY.
3. FENCE POSTS TO BE INSTALLED AT ALL LOT CORNERS WHERE IT ABUTS ANOTHER PRIVATE PROPERTY

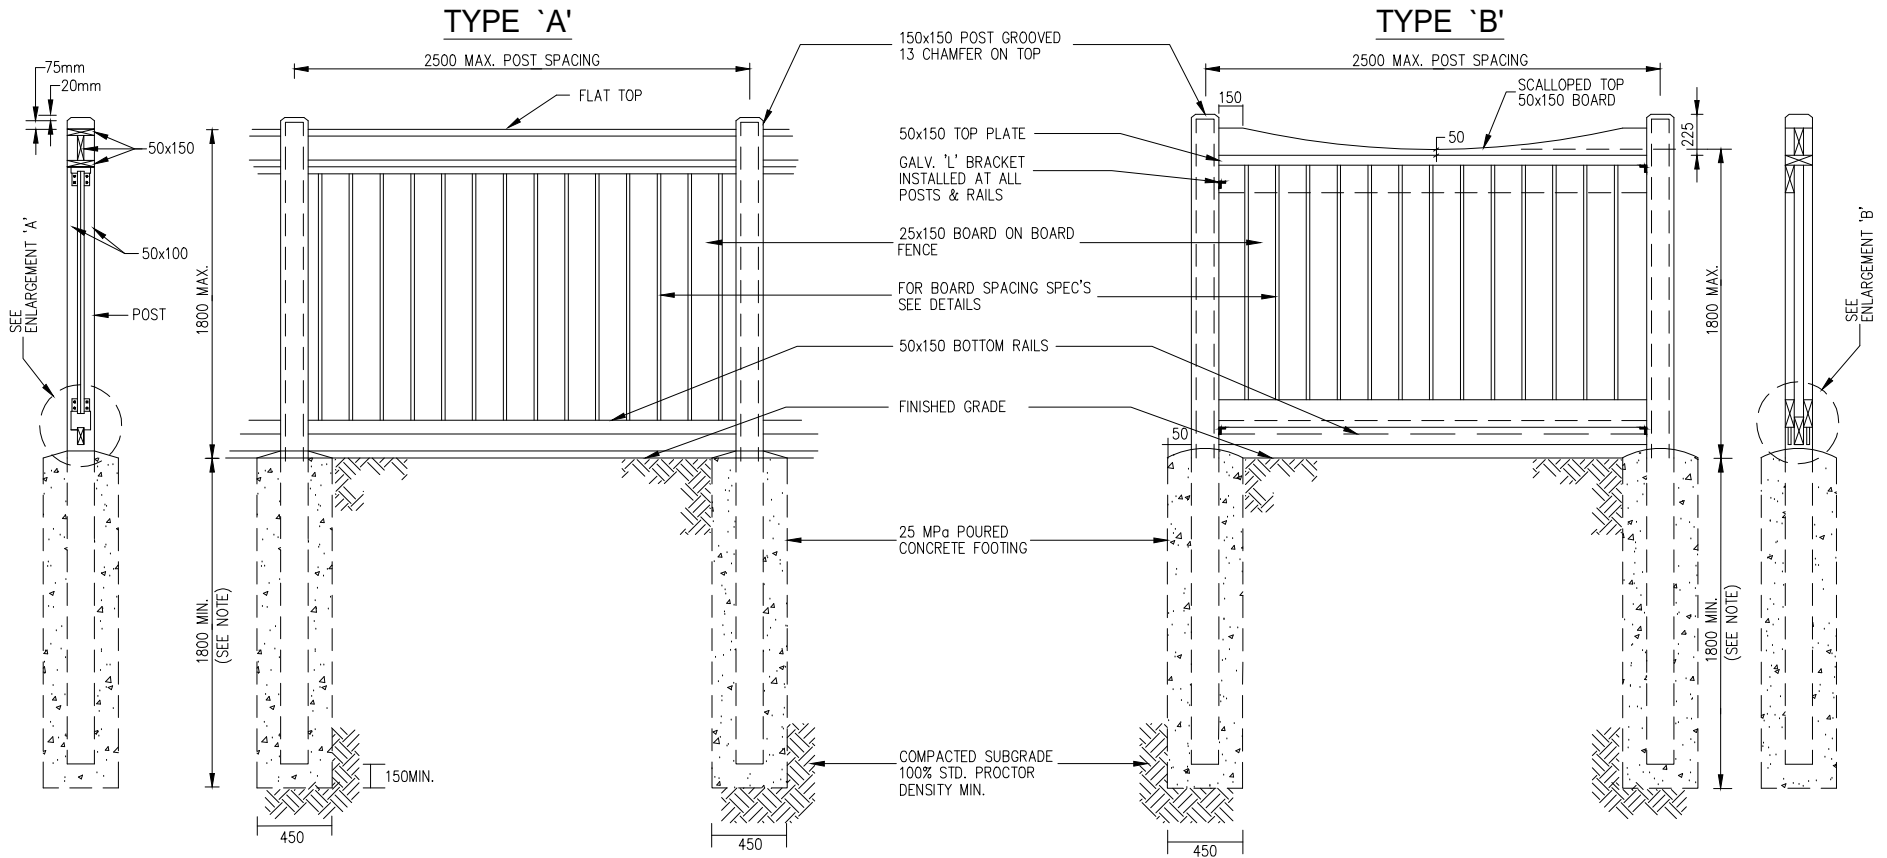

ENLARGEMENT 'A'



ENLARGEMENT 'B'

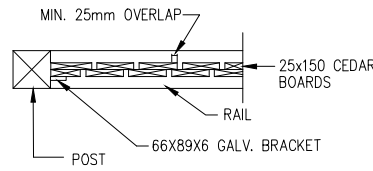

**BOARD ON BOARD
DETAIL**

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOTE

THE DEPTH IS TO BE 1800mm MINIMUM ON NATIVE SOIL.
FOR NON-NATIVE SOIL, OR FENCE HEIGHT GREATER THAN 1800mm,
THE DEPTH IS TO BE RECOMMENDED BY A PROFESSIONAL SOIL
ENGINEER.

REFER TO STD. DWG. FRW-105 FOR SPECIFICATIONS.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

PRIVACY WOOD FENCE

NOT TO SCALE DESIGNED: _____

REVISION: _____ DATE: DEC. 2020

STD. DWG.

FRW - 103

NOTES

1. ALL WOOD SHALL BE WESTERN RED CEDAR, SELECTED MAINLY FOR GOOD APPEARANCE AND FREE OF WANE AND BARK POCKETS. ALL TORN GRAIN SHALL BE FREE, ELIMINATED BY SANDING AND PLANING. MEMBERS EXHIBITING MODERATE TO HEAVY KNOTS SHALL BE WELL DISTRIBUTED THROUGHOUT THE INSTALLATION. POST SHALL BE SELECT KNOTTY (NLGA131A) RETENTION OF 20KG/SQ M SURFACE DENSITY.
2. ALL WOOD SHALL BE DRESSED FOUR SIDES.
3. ALL TIMBER CUTS SHALL BE STRAIGHT AND PLUMB.
4. MOISTURE CONTENT OF WOOD SHALL NOT EXCEED 14% AT THE TIME OF CONSTRUCTION.
5. ALL WOOD TO BEAR GRADING STAMP OF C.I.S. CERTIFIED AGENCY.
6. TREAT BOTTOM SKIRT BOARD WITH C.C.A. PRESERVATIVE TO A RETENTION OF 4.0KG/M³.
7. ALL FENCES SHALL BE INSTALLED WITHIN 30 DAYS OF INSTALLATION, WEATHER PERMITTING.
8. STAIN FOR WOOD FENCE- STAIN SHALL CONSIST OF 2 COATS OF:
 - A BASE OF BLENDED RESINS AND OILS IN A WATER SUSPENSION.
 - SUSPENDED SOLIDS WHICH ARE NOT LESS THAN 21% AND NOT GREATER THAN 31% BY VOLUME.
 - V.O.C.'S (VOLATILE ORGANIC COMPOUNDS) WHICH ARE NOT IN EXCESS OF 350G/L IN ACCORDANCE WITH A.S.T.M. D-2369.
 - LEVELS OF LIQUID MICROBICIDES AND ANY OTHER POTENTIAL TOXIC SUBSTANCES WHICH ARE ENVIRONMENTALLY SAFE (NOT REQUIRING PROVINCIAL OR FEDERAL REGISTRATION).
 - NONE OF THE FOLLOWING HAZARDOUS SUBSTANCES:
 - * FOLPET [N-(TRICHLOROMETHYLTHIO) PHTHALIMIDE]
 - * BIS (TRIBUTYL TIN) OXIDE
 - * COPPER NAPHTHENATE
 - * COPPER 8 QUINOLINOLATE
 - * ZINC NAPHTHENATE
 - SUFFICIENT OXIDE PIGMENTS TO OBTAIN DESIRED COLOUR TONE AND LEVEL OF OPACITY (COLOUR TO BE APPROVED BY LANDSCAPE ARCHITECT).
9. SECTION OF POST IMBEDDED IN CONCRETE FOOTING TO BE DIPPED IN CREOSOTE.
10. LAG SCREWS AND BOLTS SHALL BE GALVANIZED AND CONFORM TO ASTM A307.
11. ALL GALVANIZING TO BE HOT DIPPED IN CONFORMANCE TO CSA STANDARD 6164.
12. THE ACOUSTIC FENCE SHALL HAVE A MINIMUM FACE DENSITY OF 20 kg/m².
13. ALL NAILS GALVANIZED ARDOX, CONFORMING TO CSA STANDARD, AND 75MM UNLESS NOTED OTHERWISE. ALL NAILS TO BE EVENLY SPACED AND SET NOT LESS THAN 25MM FROM EDGE OF ANY MEMBER.

RAILS - 3 NAILS TO POST AT EACH END, 3 NAILS THRU BOTTOM FRONT RAIL TO VERTICAL MEMBERS AND 3 NAILS TO SKIRT BOARD IN STAGGERED PATTERN. CONTINUE ->

SKIRT RAIL - 2 NAILS TO POST AT EACH END.


FACIA BOARD - 2 NAILS (50MM) EACH END TO VERTICAL MEMBERS AND 5 NAILS IN STAGGERED PATTERN ALONG BOARD.

VERTICAL MEMBERS - 2 NAILS (88MM) TOP AND BOTTOM TO RAILS.

COPING - 2 NAILS THRU EDGES TO POST AT EACH END AND 6 NAILS THRU TOP TO VERTICAL MEMBERS.

14. COUNTER-SINK ALL LAG SCREWS AND BOLTS AND DRIVE ALL NAIL HEADS BELOW SURFACE OF WOOD.
15. FOUNDATION DESIGN IS BASED ON AN ALLOWABLE SOIL PRESSURE OF 95KN/M². OBTAIN PROFESSIONAL SOIL ENGINEER'S APPROVAL BEFORE CASTING CONCRETE FOR FOUNDATION.
16. DESIGN WIND SPEED 80KM/HR, GUST TO 100KM/HR.
17. CONCRETE FOR FOOTINGS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 25 MPA IN 28 DAYS.
18. FOR ACOUSTIC FENCE, BOTTOM RAIL SHALL BE SET ON GRADE. WHERE DRAINAGE IS TO BE CONVEYED THROUGH THE BARRIER, THEN THE DESIGN SHALL COMPLY WITH STANDARD DESIGN CRITERIA FIG. I-6
19. FIRE HOSE ACCESS TO BE DESIGNED IN ACCORDANCE WITH O.P.S.D. 998.101 & 998.131.
20. FENCES CONSTRUCTED ON BERMS:
 - A) EXTEND FOOTINGS 300MM INTO UNDISTURBED SUB-GRADE.
 - B) COMPACT BERMS TO A MINIMUM OF 100% STANDARD PROCTOR DENSITY.
 - C) CONSTRUCT BERMS WITH A 1000MM FLAT TOP AND SIDE SLOPES NO STEEPER THAN 3:1.

4.		
3.		
2.		
1.		
REVISIONS		DATE
		
CITY OF VAUGHAN ENGINEERING STANDARD		
ACOUSTIC / PRIVACY FENCE NOTES		
NOT TO SCALE	DESIGNED: _____	STD. DWG.
REVISION: _____	DATE: DEC. 2020	FRW - 104

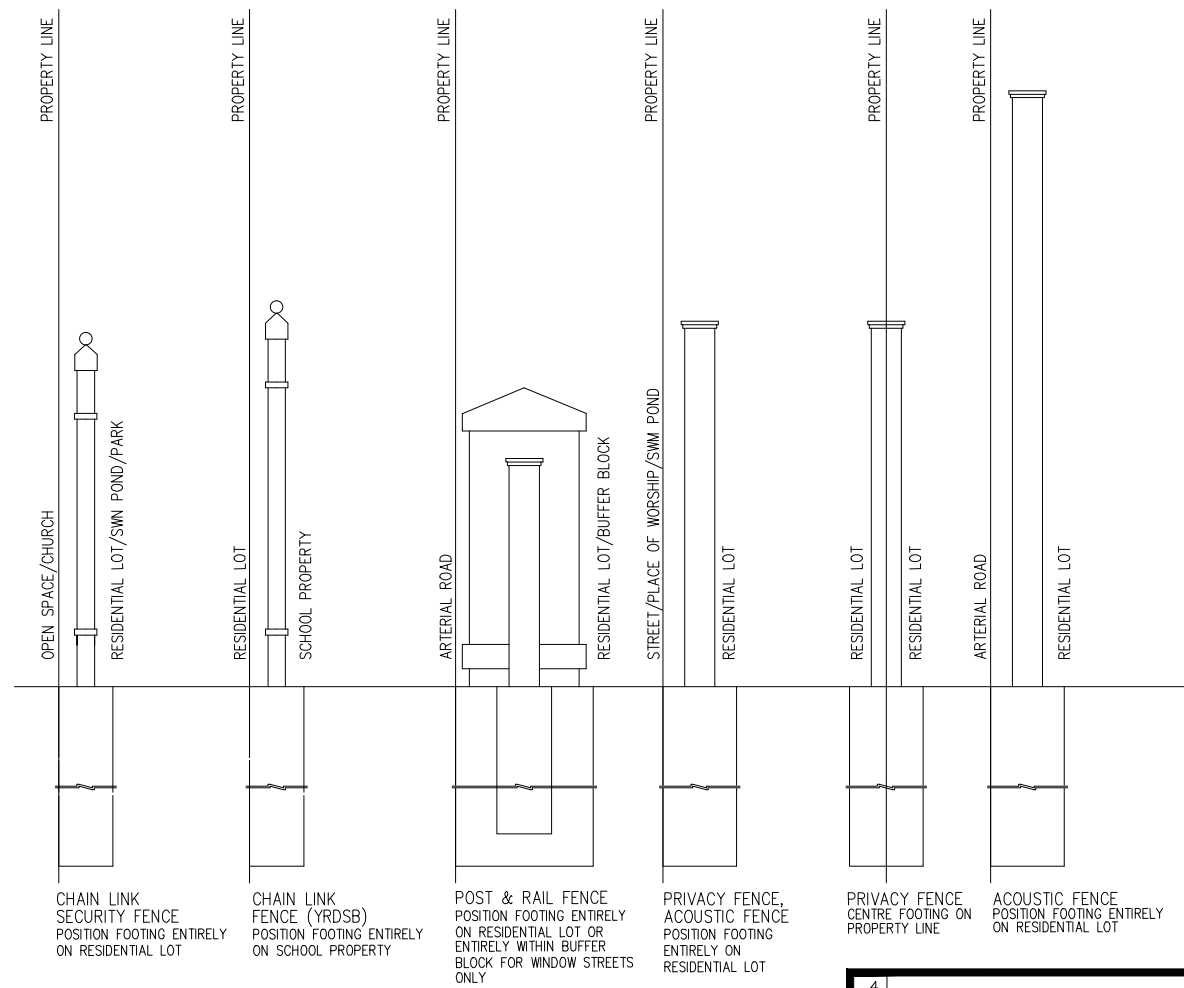

NOTES:

1. ALL FENCE, INCLUDING THEIR FOOTINGS/FOUNDATIONS, MUST BE LOCATED ENTIRELY OUTSIDE OF ANY 0.3m RESERVES.

4.		
3.		
2.		
1.		
REVISIONS		DATE



CITY OF VAUGHAN ENGINEERING STANDARD

FENCE TYPES & PLACEMENT

mm DIMENSIONS IN MILLIMETRES
EXCEPT AS NOTED

NOT TO SCALE DESIGNED: _____
REVISION: _____ DATE: DEC. 2020

STD. DWG.
FRW - 106